



TECHNICAL
ARCHITECTURE

RETROFIT

INDUSTRIAL

OUTDOOR

PORTABLE & TABLE

WALL

SUSPENSION

SURFACE

RECESSED

TRACK LIGHTS

CONTROL

LED STRIPS

PROFILES


CUSTOM SYSTEM





At Beneito Faure, we are opening our new offices,
a space designed to keep growing and offering
the very best to our clients.

En Beneito Faure estrenamos nuevas oficinas,
un espacio diseñado para seguir creciendo y
ofreciendo lo mejor a nuestros clientes.

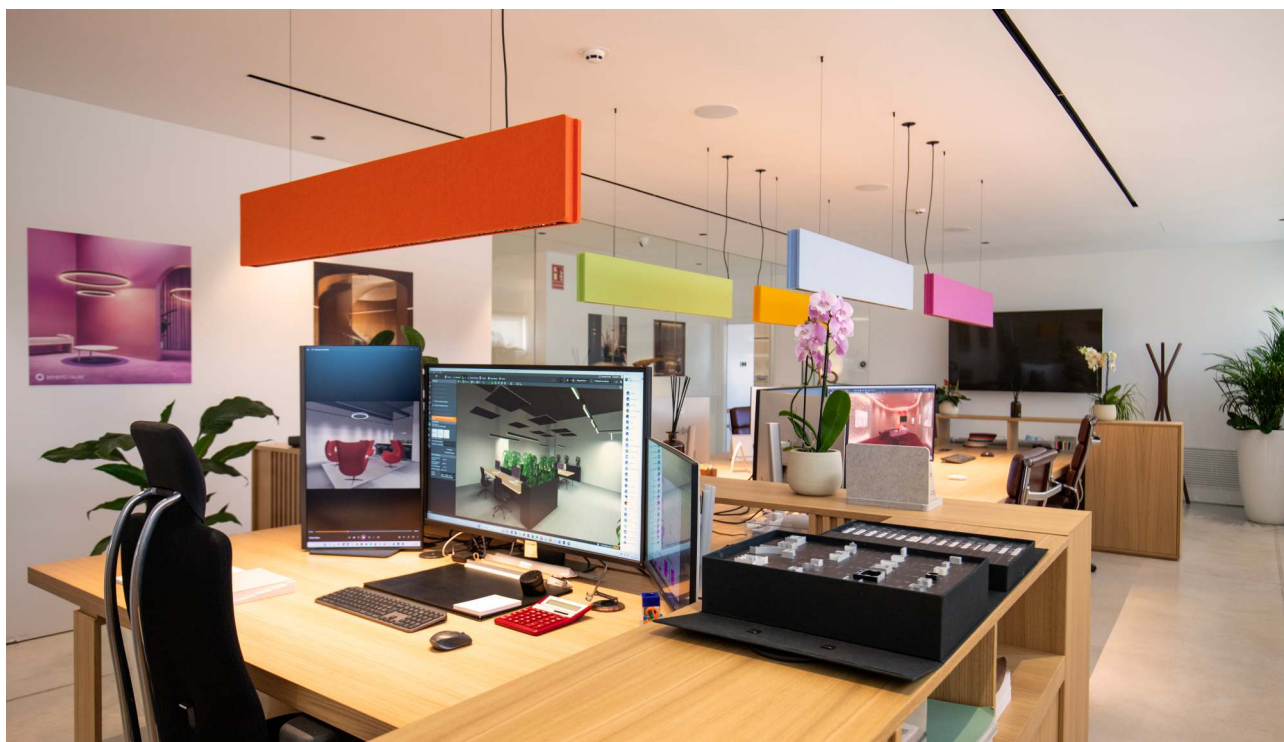

Projects



Our project department offers a wide range of services focused on providing lighting solutions that are not only aesthetically appealing, but also improve people's quality of life and comply with current regulations.

Below we describe the key services that our project department can offer:

- Custom lighting design: Our team of highly skilled lighting designers works closely with costumers to create lighting solutions tailored to their specific needs. We strive to understand the unique characteristics of each project and design lighting systems that enhance the aesthetics, functionality, and comfort of the space.
- Human-centered lighting: We recognize the importance of lighting on people's health and well-being. Our designs take into account factors such as circadian cycle, visual fatigue and ergonomics to ensure that lighting contributes positively to the environment and people's performance.
- Energy efficiency: We are introducing practices and products that increasingly fit within the parameters of sustainability. We believe in creating and distributing LED products that fit within a circular economy in order to minimize waste and have a more sustainable and durable planet, always adding value to each lighting project. We are committed to designing lighting systems that are highly energy efficient. This not only reduces operating costs, but also contributes to environmental sustainability. Our designs incorporate cutting-edge LED lighting technologies and intelligent control systems.
- Regulations: Our team is highly trained in current regulations and standards in the field of lighting. We ensure that all our designs comply with local and national standards, guaranteeing the safety and legal compliance of each project.
- Technical advice in the choice of products and during product installation.

Our project department offers solutions that improve people's quality of life, comply with regulations and stand out for their innovative design. If you are looking for a reliable partner for your next lighting project, do not hesitate to contact us. We are ready to bring your lighting ideas and needs to life.

If you are looking for a reliable partner for your next lighting project, feel free to contact us. We are ready to bring your ideas and lighting needs to life.

On the right is one of our latest interior lighting projects, CONNECTA FISIOTERÀPIA I SALUT.

Nuestro departamento de proyectos ofrece una amplia gama de servicios enfocados en proporcionar soluciones de iluminación que no solo sean estéticamente atractivas, sino que también mejoren la calidad de vida de las personas y cumplan con las regulaciones vigentes.

A continuación, describiremos los servicios clave que nuestro departamento de proyectos puede ofrecer:

- Diseño de iluminación personalizado: Nuestro equipo de diseñadores de iluminación altamente capacitado trabaja en estrecha colaboración con los clientes para crear soluciones de iluminación adaptadas a sus necesidades específicas. Nos esforzamos por comprender las características únicas de cada proyecto y diseñar sistemas de iluminación que realcen la estética, la funcionalidad y la comodidad del espacio.
- Iluminación centrada en el ser humano: Reconocemos la importancia de la iluminación en la salud y el bienestar de las personas. Nuestros diseños tienen en cuenta factores como el ciclo circadiano, la fatiga visual y la ergonomía para garantizar que la iluminación contribuya positivamente al entorno y al rendimiento de las personas.
- Eficiencia energética: Estamos introduciendo prácticas y productos que se ajustan, cada vez más, dentro de los parámetros de la sostenibilidad. Creemos en la creación y distribución de productos LED que encajen dentro de una economía circular para poder minimizar los residuos y tener un planeta más sostenible y duradero, siempre añadiendo valor a cada proyecto de iluminación. Nos comprometemos a diseñar sistemas de iluminación que sean altamente eficientes desde el punto de vista energético. Esto no solo reduce los costos operativos, sino que también contribuye a la sostenibilidad ambiental. Nuestros diseños incorporan tecnologías de iluminación LED de vanguardia y sistemas de control inteligente.
- Normativa: Nuestro equipo está altamente capacitado en las regulaciones y normativas vigentes en el campo de la iluminación. Nos aseguramos de que todos nuestros diseños cumplan con los estándares locales y nacionales, garantizando así la seguridad y el cumplimiento legal de cada proyecto.
- Asesoramiento técnico en la elección de los productos y durante la instalación de los mismos.





Nuestro departamento de proyectos ofrece soluciones que mejoran la calidad de vida de las personas, cumplen con las normativas y destacan por su diseño innovador. Si está buscando un socio de confianza para su próximo proyecto de iluminación, no dude en ponerse en contacto con nosotros. Estamos listos para dar vida a sus ideas y necesidades de iluminación.

A la derecha se muestra uno de nuestros últimos proyectos de iluminación interior, CONNECTA FISIOTERÀPIA I SALUT.

Render




Lighting calculation

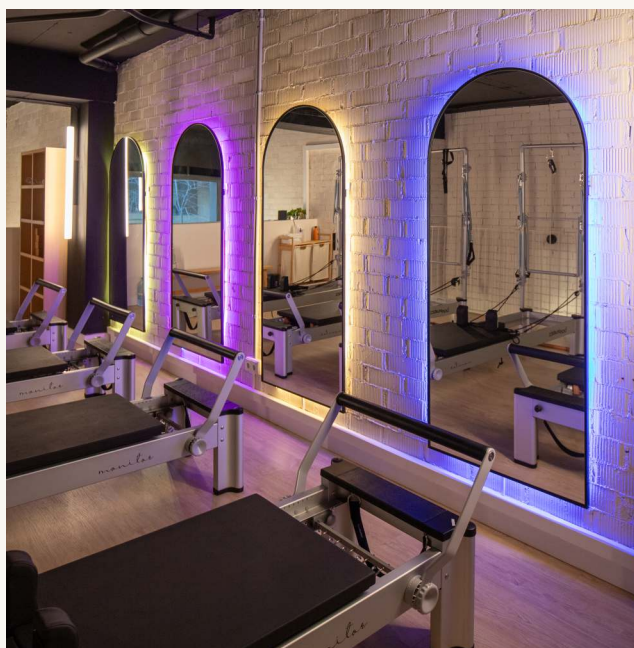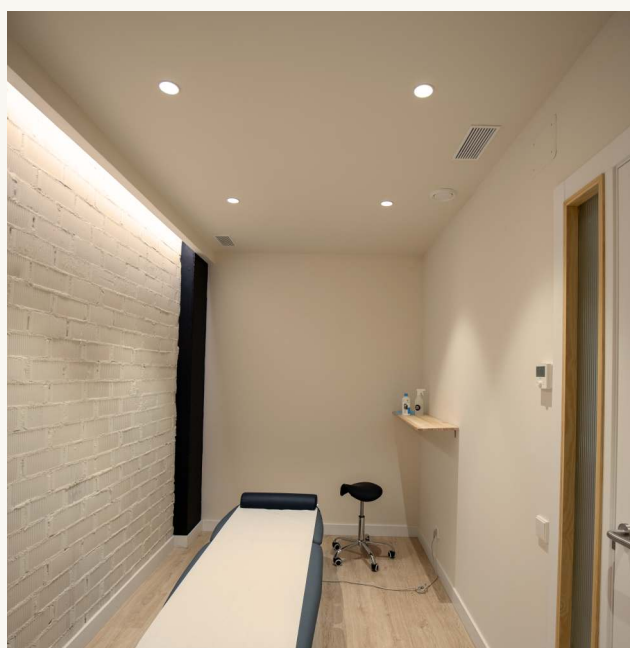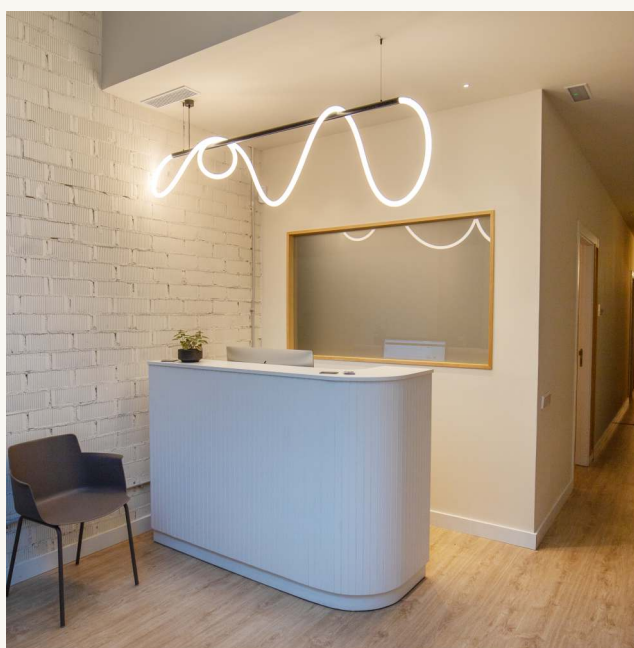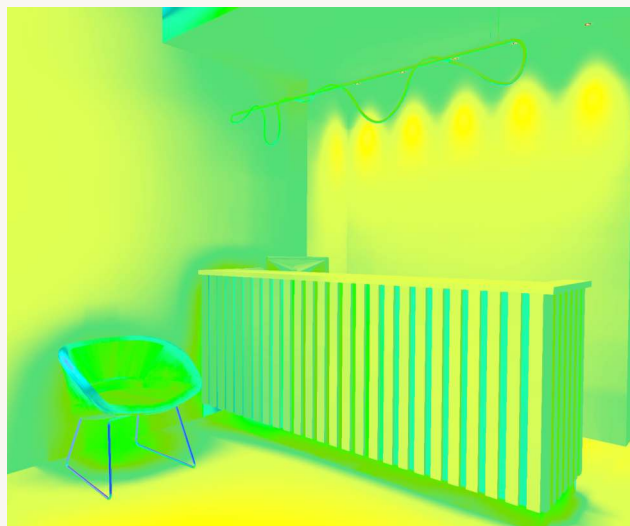

Discover our selection of exhibitors designed by Beneito Faure to present and explain our products to our customers in a simple and interactive way, being able to appreciate the materials, the different applications and their lighting effects. Each exhibitor is designed to communicate in the most effective way the characteristics and benefits of our products. Contact our sales department to order your exhibitor.

Led strip book

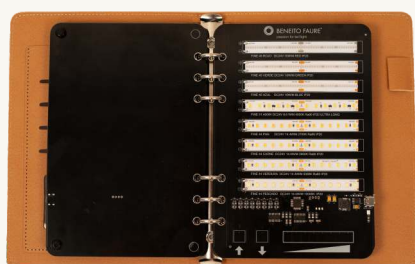

(37x3,5x23,5cm)

Led strip briefcase




(42x15x35cm)

Led strips and profiles
1st display



(64x40x174cm) / (64x40x213cm) with 2m profiles

Led strips and profiles
2nd display

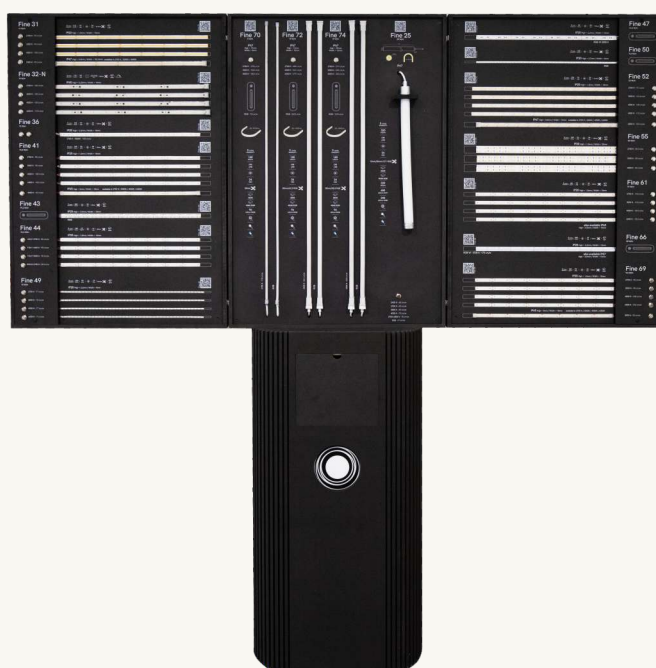

(197x45x197cm)

Sampling & Display Stand

Descubre nuestra selección de expositores diseñados por Beneito Faure para ayudar a nuestros clientes a dar a conocer y explicar nuestros productos de una forma sencilla e interactiva, pudiendo apreciar los materiales, las diferentes aplicaciones y los efectos lumínicos de los mismos.

Cada expositor está pensado para comunicar de la manera más eficaz las características y beneficios de nuestros productos. Ponte en contacto con nuestro departamento comercial para pedir tu expositor.

Touch panel display



(110x38x200cm)

Magnet track mini display




(71,5x18x46cm)

HUMAN CENTRIC LIGHTING

One CCT foreach activity

Un CCT en cada actividad de tu día

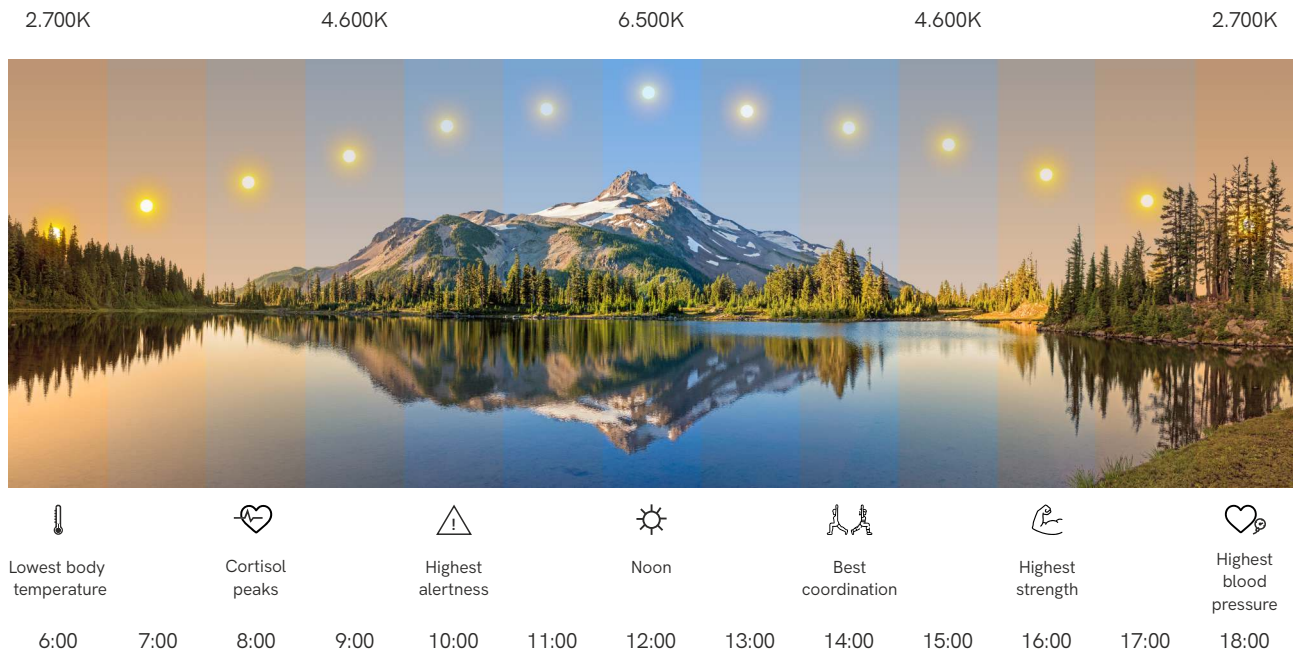

CCT is the color appearance that a light source emits compared to a CIE standard. It is measured in degrees Kelvin (K). The warmest lights have the lowest values and the coldest ones the highest. Our CCTs range from 2200K to 6000K.


You can create and modify lighting scenes, change light intensity, and choose from a great variety of CCTs. With CASAMBI control, for example, you can create lighting based on the circadian circle.

El CCT es el aspecto cromático que emite una fuente de luz en comparación con un estándar CIE. Se mide en grados Kelvin (K). Las luces más cálidas tienen los valores más bajos y las más frías los más altos. Nuestros CCT van de 2.200K a 6.000K.

Puede crear y modificar escenas de iluminación, cambiar la intensidad de la luz y elegir entre una gran variedad de CCT. Con el control CASAMBI, por ejemplo, puede crear una iluminación basada en el círculo circadiano.


Light quality

Calidad de la luz

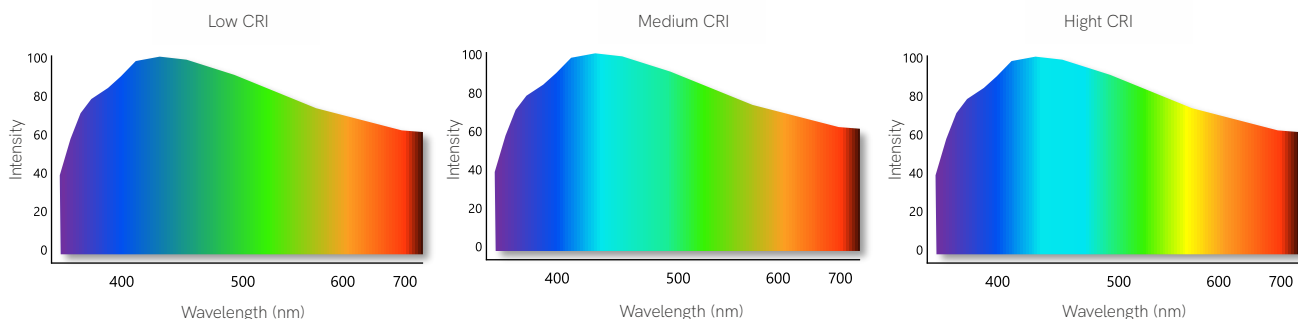


CRI or the Color Rendering Index is a measurement that evaluates how faithfully a light source displays colors compared to natural light. It is classified from 0 to 100; 100 value is highest accurate representation of colors, while lower values may distort the appearance of colors. Our products CRI range from 80 to 98.

El CRI o Índice de Reproducción Cromática es una medida que evalúa la fidelidad con la que una fuente de luz muestra los colores en comparación con la luz natural. Se clasifica de 0 a 100; el valor 100 es la representación más precisa de los colores, mientras que los valores inferiores pueden distorsionar la apariencia de los colores. El CRI de nuestros productos oscila entre 80 y 98.

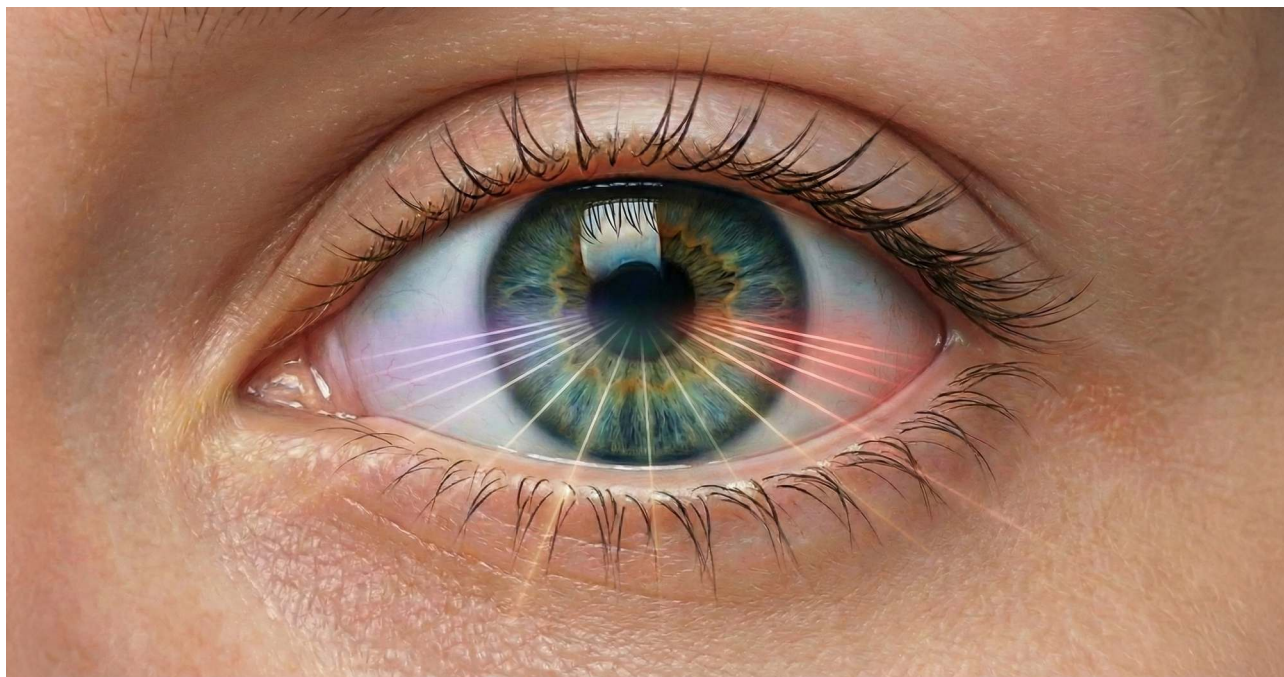

Photobiological risk are all photobiological hazards that can affect the skin and eyes. From ultraviolet to infrared wavelengths. A RG0 is the lowest risk and RG4 is the highest risk. All our products are the lowest risk, RG0 or RG1.

Son todos los **riesgos fotobiológicos** que pueden afectar a la piel y los ojos. Desde las longitudes de onda ultravioleta hasta las infrarrojas. Un RG0 es el riesgo más bajo y un RG4 es el riesgo más alto. Todos nuestros productos tienen el riesgo más bajo, RG0 o RG1.

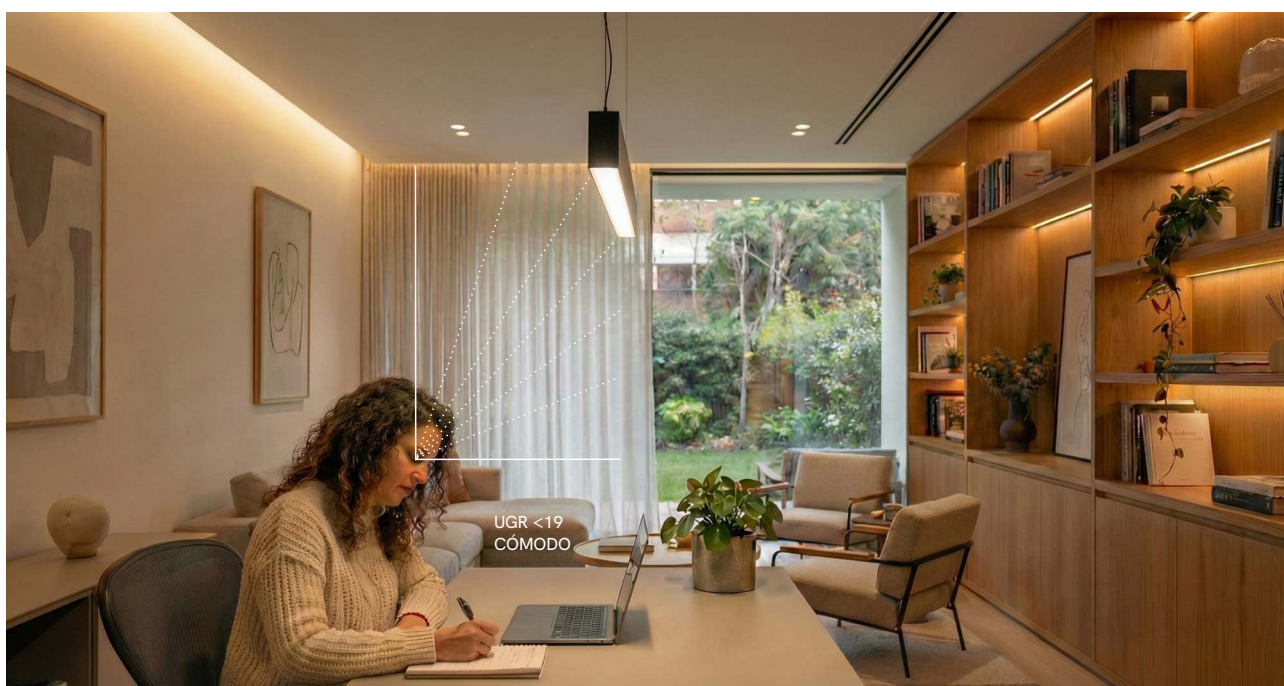

UGR or united glare rating is a measurement that helps us understand how much annoying glare can affect our vision. When the brightness is very strong it makes you squint or makes it difficult for you to see well. The higher the index, the more annoying the brightness can be for our eyes. You can check which products have a UGR less or equal than 19 as requested by the regulations for workspaces.

El **UGR** o índice de deslumbramiento unido es una medida que nos ayuda a comprender hasta qué punto el molesto deslumbramiento puede afectar a nuestra visión. Cuando la luminosidad es muy intensa, nos hace entrecerrar los ojos o nos dificulta ver bien. Cuanto mayor sea el índice, más molesto puede ser el brillo para nuestros ojos. Puede comprobar qué productos tienen un UGR inferior o igual a 19, tal y como exige la normativa para espacios de trabajo.

Symbology



Installation.
Instalación.



Casambi protocol.
Protocolo Casambi.



Tuya protocol.
Protocolo Tuya.



Need Tuya Smart App to work.
Necesita aplicación Tuya Smart para funcionar.



Dali / Dali 2 protocol.
Protocolo Dali / Dali 2.



Lumen Maintenance.
Mantenimiento de lúmenes.



Push.
Pulsador.



Emergency kit in luminaire.
Kit de emergencia en luminaria.



TRIAC Dimmable.
Regulable por TRIAC.



Radio frequency.
Radio frecuencia.



Made to measure strip LED cutting.
Corte de tiras LED a medida.



3 light intensities.
3 intensidades luminosas.



Saline-alkali resistance.
Resistencia a los álcalis salinos.



Customized cutting and handling.
Corte y manipulación personalizado.



Corrosion resisting.
Resistencia a la corrosión.



Anti-UV.
Anti-UV.



Customizable color.
Color personalizable.



Type of aluminium.
Tipo de aluminio.



Supported weight.
Peso soportado.



Glare rating.
Índice de deslumbramiento.



Color temperature selector.
Selector de temperatura de color.



Power selector.
Selector de potencia.



Color rendering index.
Índice de reproducción cromática.



Water and dust protection.
Resistencia al agua y al polvo.



Beam Angle.
Ángulo de apertura.



Light 360°.
Luz 360°.



Power Factor.
Factor de Potencia.





Voltage.
Tensión de entrada.



Surface luminaire not suitable for mounting on flammable surfaces.
Luminaria de superficie no adecuada para montaje en superficies inflamables.





Recessed luminaire not suitable for mounting on flammable surfaces.
Luminaria empotrada no adecuada para montaje en superficies inflamables.

	Do not cover. No cubrir.		Replace cracked protection shield. Sustituir pantalla de protección con fisuras.
5 YEARS WARRANTY	Warranty. Años de garantía.		Class I. Clase I.
30.000 HOURS	Lifetime. Horas de vida.		Class III. Clase III.
50/60 Hz	Hertz. Hercios.		Supported weight. Peso soportado.
	Class II. Clase II.		Operating Temperature. Temperatura de trabajo.
CABLE 24CM	Cable length. Longitud del cable.		Ground slope. Inclinación del suelo.
	Surge protection. Protección contra sobretensiones.	AKZO NOBEL	Anti corrosive marine paint. Pintura anticorrosión marina.
	Impact resistance. Resistencia a los impactos.		Wireless charging. Carga inalámbrica.
	Touch control. Control táctil.		Battery capacity. Capacidad de la batería.
	4-150 HOURS Battery autonomy. Autonomía de la batería.		5-6 HOURS Charging time with sun. Tiempo de carga con sol.
	5-6 HOURS Charging time with electricity. Tiempo de carga con corriente.		ON OFF Crepuscular sensor. Sensor crepuscular.
	PIR SENSOR Motion sensor. Detector de movimiento.		Gravity sensor. Sensor gravitatorio.
	1m-7m Distance sensor. Distancia de detección.		8 sec 8 min Adjustable operating time. Tiempo de encendido regulable.
	ENCLOSED OK Suitable for closed luminaires. Apta para luminarias cerradas.		EMC anti-interference certification. Certificación anti interferencias EMC.
	Units per box (min-max). Unidades por caja.	RoHS	Restriction of Hazardous Substances. Restricción de sustancias peligrosas.
	Electronic waste. Residuos electrónicos.	CE	European conformity. Conformidad Europea.


Index

Custom system

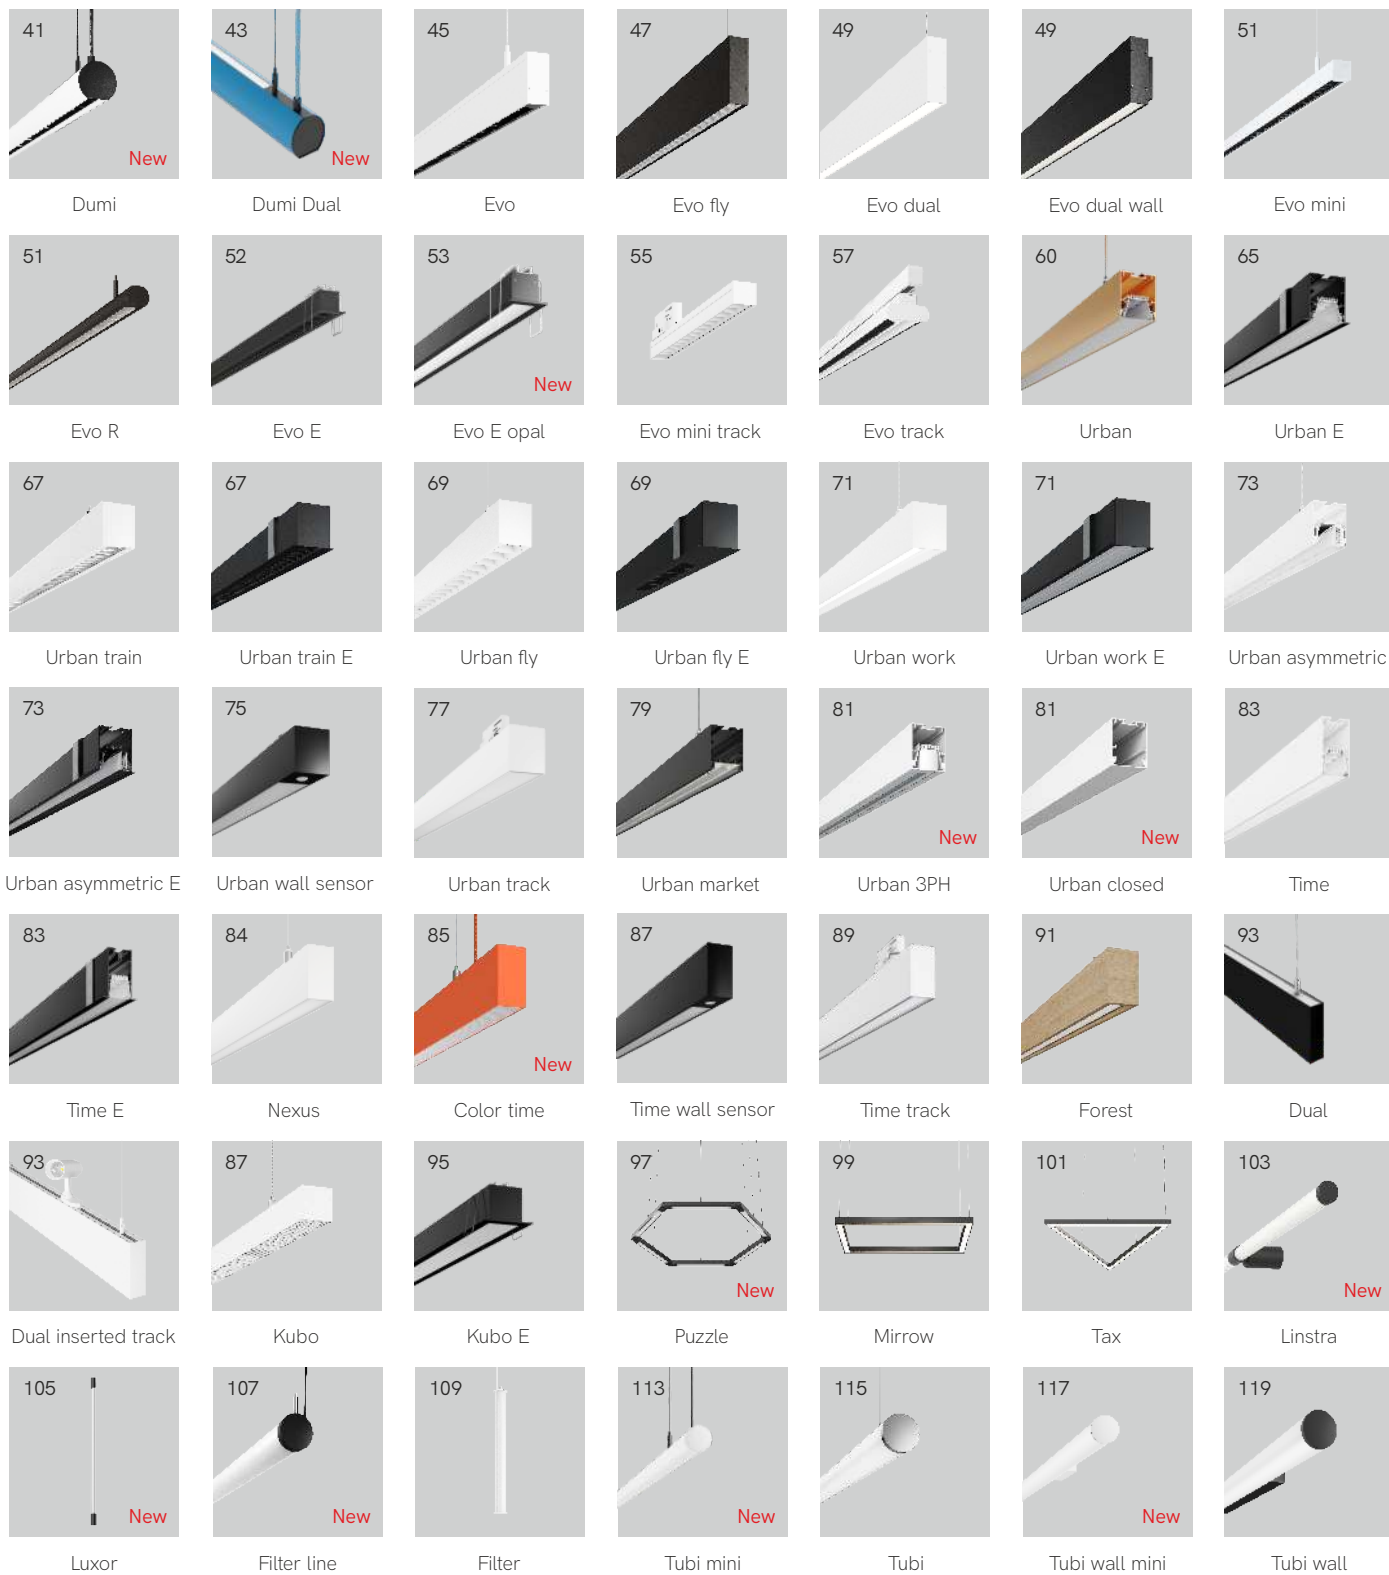




Grip




Nyneto




Minimus




Vision



Quick



Dau




Dau E



Square



Zero Q




Zero D




Zero T



Zero in XL



Zero out XL




Zero in




Zero out



Circus in XL



Circus out XL



Circus in



Circus out



Tundra



Zero direct XL




Zero direct




Zero design




Zero up & down




Kaa




Kaa line




Horizon



Lift



Lift wall



Flash



Triton



Triton down




Custom system accessories













Emergency

Profiles

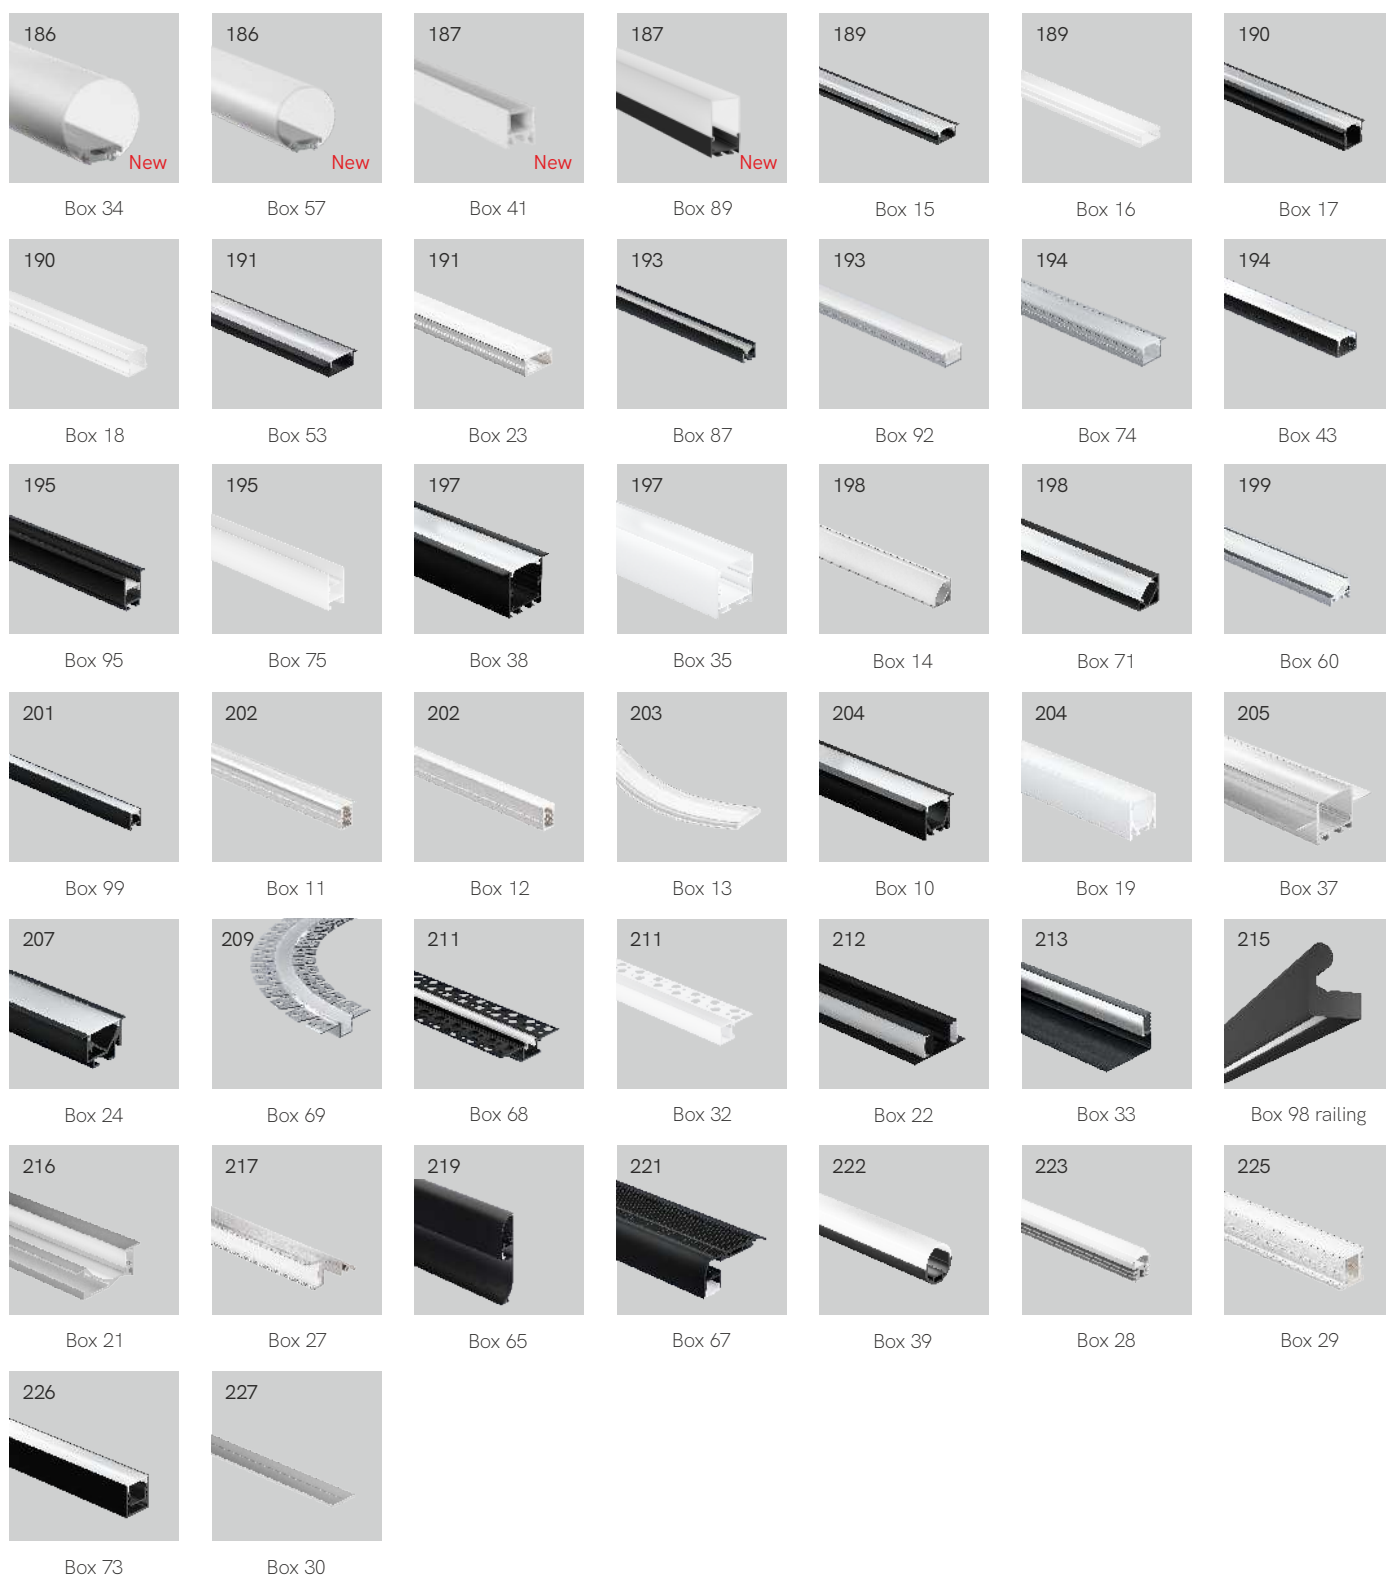


Led strips




244  New Fine 31	245  Fine 82	246  Fine 92	247  Fine 52	249  Fine 41	250  Fine 68	251  Fine 79
252  Fine 61	253  Fine 76	255  Fine 96	256  Fine 56	257  Fine 30	259  Fine 51	260  Fine 75
261  Fine 32 N	262  Fine 88	263  Fine 49	264  Fine 55	265  Fine 37	267  New Fine 86	268  New Fine 90
269  New Fine 91	271  Fine 44	273  Fine 63	274  Fine 36	275  New Fine 81	277  Fine 42	279  Fine 54
281  Fine 46	282  Fine 43	283  Fine 50	285  Fine 60	286  Fine 66 N	287  Fine 71	288  Fine 47
289  Fine 45	291  New Fine running	293  Fine SPI-2	295  Fine SPI-3	296  Fine SPI-4	297  New Fine SPI-5	299  Fine DMX-4
301  Fine DMX-5	305  Fine 25	307  Fine 34	309  Fine 77	311  Fine 70	313  Fine 72	315  Fine 74
316  New Fine 73	317-319  Led strips accessories	291  Dynamic control	223-339  CASAMBI DMX SPI Control	340-341  Power supplies 24V	331, 343  Sensor	

Track lights









Three phase track

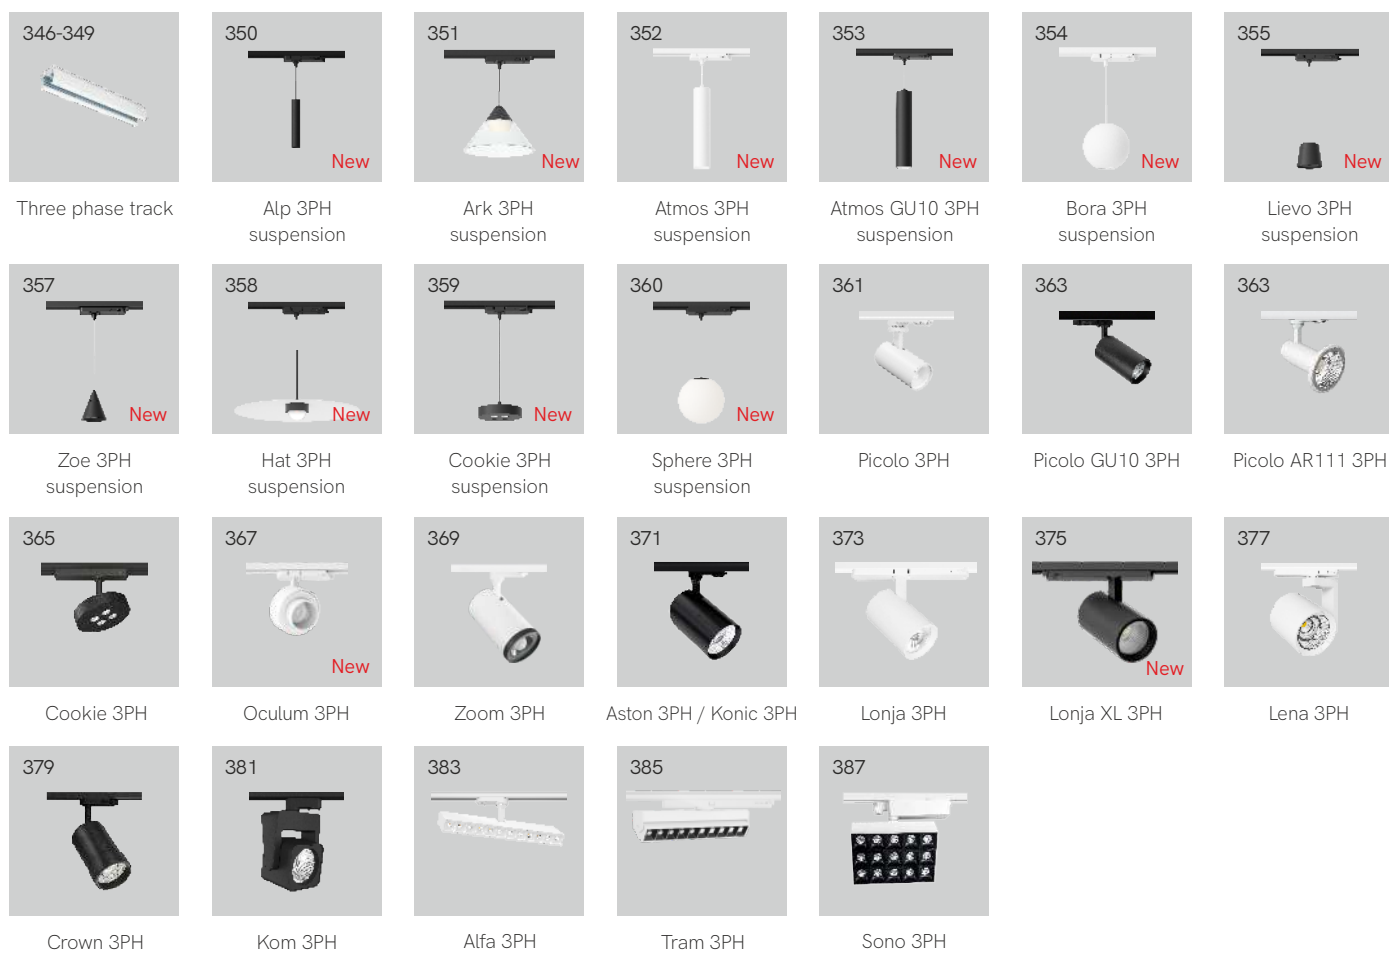



Magnet track mini

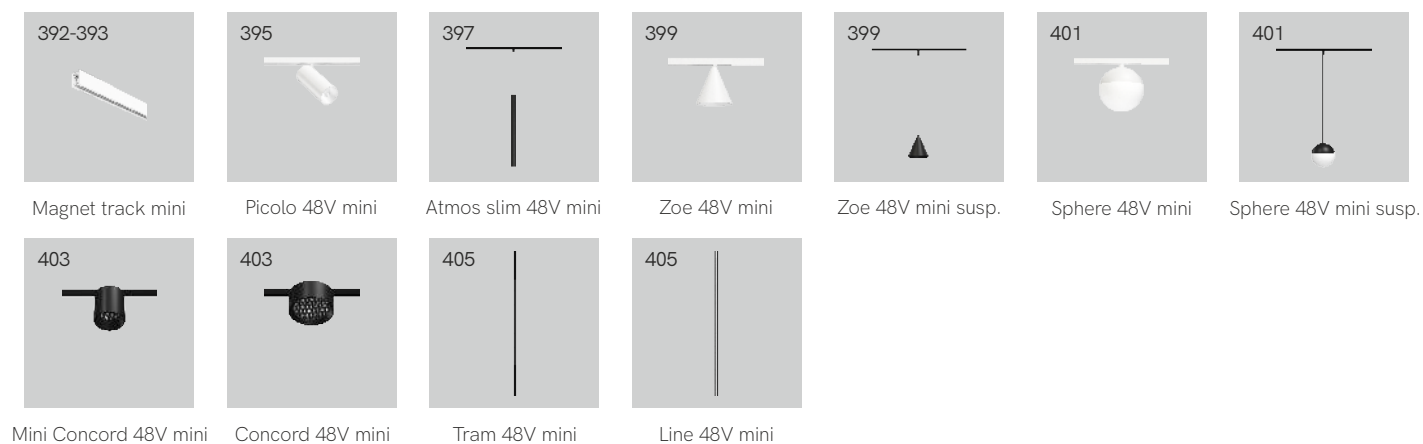





Magnet track



 410-411	 410	 413	 415	 415	 417	 417
Magnet track 48V	Power supplies 48V	Casambi control	Alp 48V	Alp 48V suspension	Mini Bora 48V	Bora 48V suspension
 419	 419	 421	 421	 423	 425	 427
Tram 48V	Curve tram 48V	Line 48V	Curve line 48V	Diro 48V	Zoe 48V suspension	Hat 48V suspension
 429	 429	 431	 433	 435	 435	 437
Sphere 48V	Sphere 48V suspension	Volt 48V	Dot 48V	Cookie 48V	Cookie 48V suspension	Fine 25 circle 48V

Outdoor track


 441	 441	 443	 445	 447	 449
Outdoor Track IP	Power supplies 48V IP	Frame 48V IP	Atmos slim 48V IP	Bit 48V IP	Ice 48V IP

Recessed


 453	 455	 457	 459	 459	 459	 461
Argo recessed	Atom recessed	Micro Zoom recessed	Nano Pulsar recessed	Nano Pulsar trim	Nano pulsar surface	Pulsar dimm recessed
 461	 461	 463	 465	 467	 469	 471
Pulsar trim	Pulsar surface	Nano Oxo recessed	Mini Oxo recessed	Mini Oxo rect recessed	Oxo dimm recessed	Bora recessed

473 	475 	477 	479 	479 	479 	481  New
Tram recessed	Compac recessed	Pulcom recessed	Pulcom led accessory	Pulcom trim	Pulcom surface	Tao recessed
483 	485-487 	489 	491 	493 	493 	493 
Noi recessed	Thessis recessed	Air recessed	Bonn recessed	Fijo recessed	Basculante recessed	Eclipse recessed
495 	495 	497 	499 	499 	501 	
One recessed	Zio recessed	Luk recessed	Bathroom recessed	Rok recessed	Avant recessed	


Surface

504-505 	507 	509 	511 	513 	515 	517 
Golf surface	Bora surface	Alp surface	Plus surface	Concord surface	Rubyc surface	Volt base
519 	520 	521 	523 	525 	525 	527 
Volt 3 surface	Volt GU10 base	Volt 3 GU10 surface	Picolo base	Picolo GU10 surface	Picolo AR111 surface	Crown base
529-531 	533 	535 	535 	535 		
Kora surface	Nox surface	One surface	Zio surface	Avant surface		

Suspension

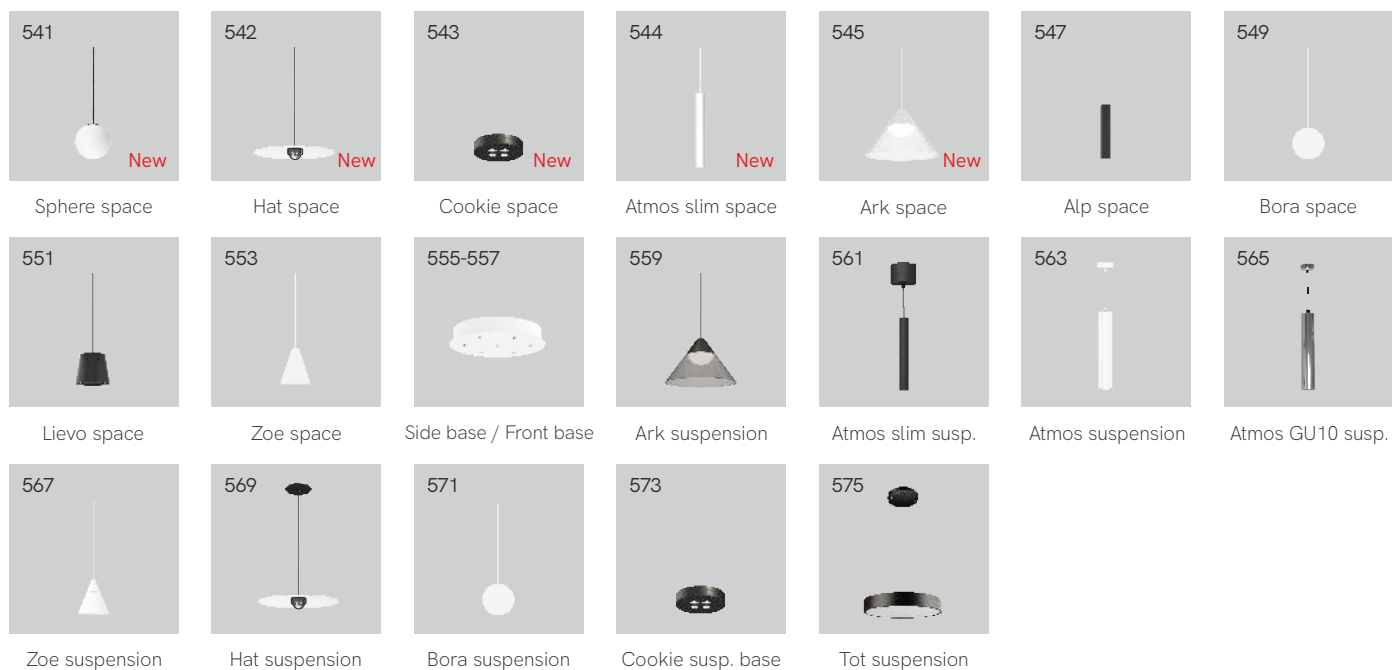


Wall

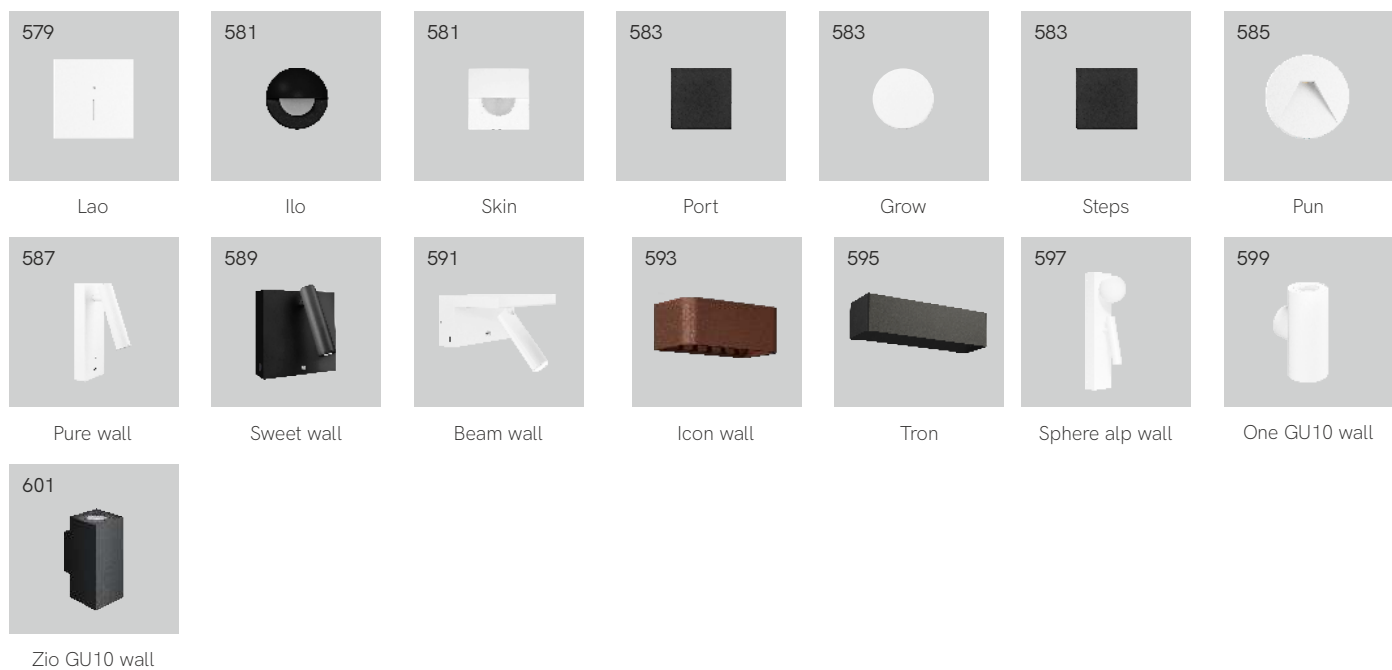

Portable and table



Outdoor

621 	621 	623 	625 	627 	629 	631 
Polo	Luky	Ina / Dis / Nix	Mis wall	Artis wall	Tween	Lek sensor
633 	635 	637 	639 	641-643  New	645 	647 
Lek wall	Sphere wall	Oma	Clos wall	Neo	Mac wall	Mac wall base
649 	651 	651 	653 	655-657 	659 	661 
Comet	Zibor	Selen	Blis	Sunset	Pla	Optic
663 	665 	665 	667 	669 	671 	673 
Sigma	Caddie	Fade	Zas	Nik	Signal	Sair
675 	677 	679 	680-681 	684-685  New	687 	688-689 
Fix	Wech	Sky spike	Sky switch	Sky 4CCT	Sky sensor	Sky
691  New	693 	695 	697  New	699 	701 	703 
Polaris	Krion	Clos base	Cam	Mac floor	Tura	Joint IP68

Solar

707 	709 	711 	713 	715 	717 	719 
Gam	Twist	Popa	Proa	Egna	Iris	Visor solar
721 						
Sky solar sensor						

Industrial



Ufo Lens switch



Ufo Lens Dali



Retrofit




Tutto MR11 / GU10








Hook GU10 / dimm.

Uniform-line
MR16 / GU10 / dimm.


Narrow GU10 dimm.

System MR16 /
GU10 / dimmable

R-63 s-line GU10

Power MR16 /
GU10 / dimmableLynk G53 /
GU10 / dimmableAR111 15°
G53 / GU10Nitro GU10 /
Dole GU10Shop E14 /
Prisma E14Flama E14 /
E27 / dimmableEsférica E14 /
E27 / dimmableStandard E27 /
dimmableGlobo E27 /
dimmable

R-39 E14



R-50 E14



R-63 E27




R-80 E27



R-90 E27



PL T40 E27



Par 30 E27



Par 38 E27



Par 38 Green E27




Sil E27



Aria E27 / E40



Obo E27 / E40



Smile E27 / E40



Cup E27 / E40



Noa E27 / E40



Adn G4



Uniform-line G4



Uniform-line G9



Max BA15d



Cala G24

Lineal tubular
R7S / dimmable


Lineal R7S

HQI tubular
E27 / G12


HQI tubular RX7S

Collections

Alp




Nano Alp 3PH
suspension



Alp 3PH
suspension




Alp 48V




Alp 48V suspension



Alp surface




Nano Alp space



Alp space

Ark



Ark 3PH
suspension




Ark space




Ark suspension


Atmos




Atmos 3PH
suspension




Atmos XL 3PH
suspension




Atmos GU10 3PH
suspension




Atmos GU10 3PH XL
suspension



Atmos slim 48V mini



Atmos slim 48V IP




Atmos slim space



Atmos slim susp.




Atmos suspension



Atmos XL suspension



Atmos GU10
suspension



Atmos GU10 XL
suspension

Blis



Blis r




Blis sq




Blis rect


Bora

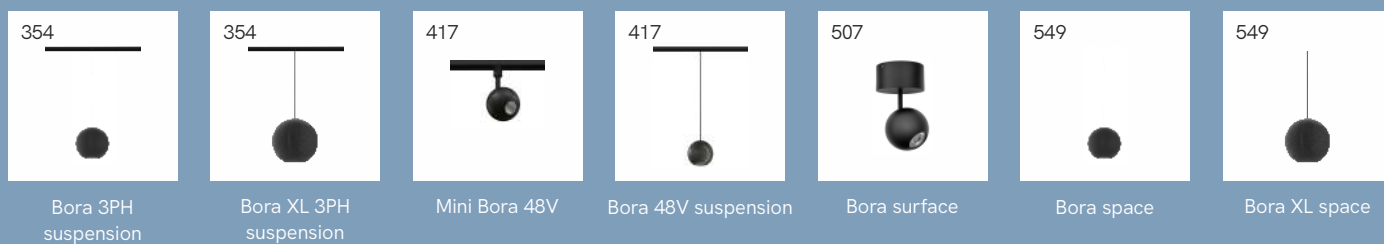

Circus

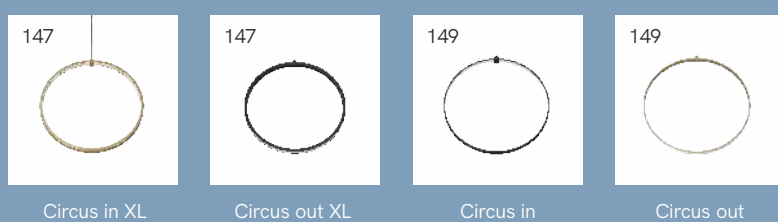

Concord

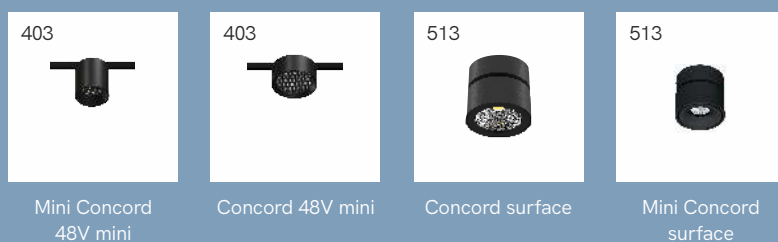


Cookie




Crown




Evo




Evo




Evo fly




Evo dual




Evo dual wall




Evo mini



Evo R




Evo E



Evo E opal




Evo mini track




Evo track

Filter




Filter line





Filter


Hat

Mini Hat 3PH
suspension

Hat 3PH suspension


Mini Hat 48V
suspension

Hat 48V suspension


Mini Hat
suspension

Hat suspension

Kaa



Kaa



Kaa line

Lievo



Lievo 3PH susp.



Lievo XL 3PH susp.



Lievo space



Lievo XL space


Oxo



Nano Oxo recessed



Mini Oxo recessed


Mini Oxo rect 2
recessedMini Oxo 4
rect recessedMini Oxo 6
rect recessed

Oxo dimm recessed

Piccolo




Sphere

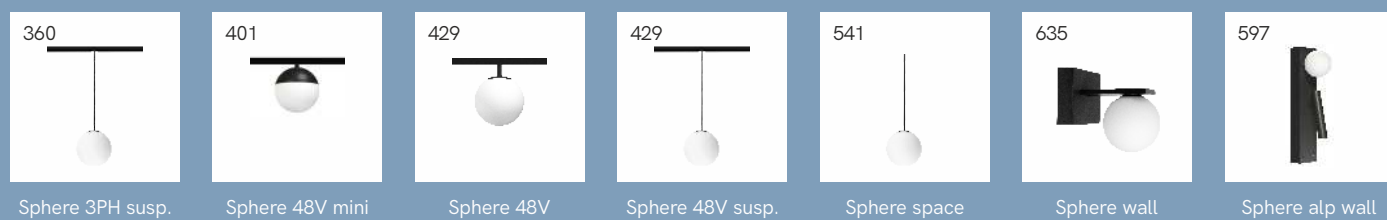


Sunset




Time

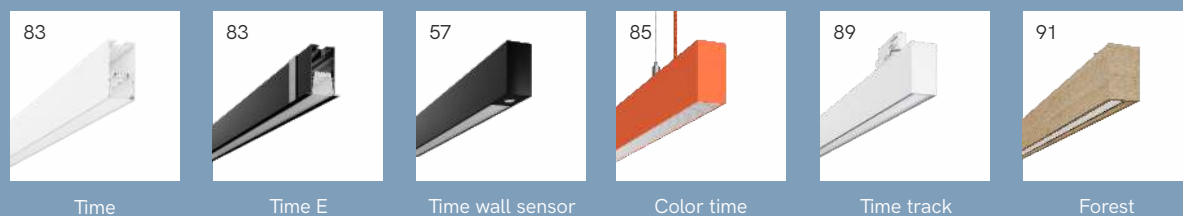


Tram

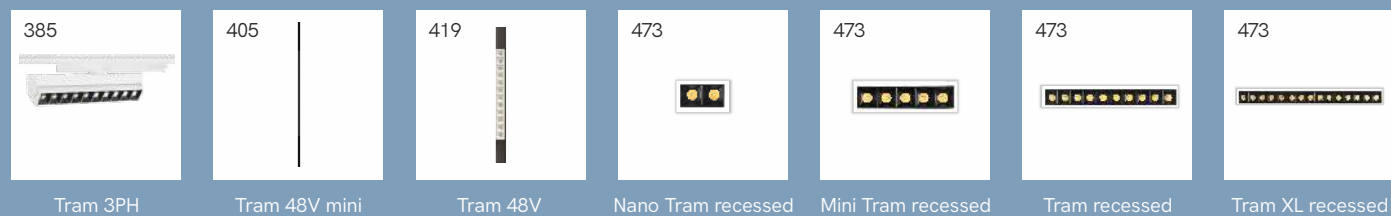


Triton

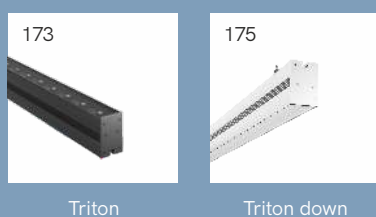


Tubi

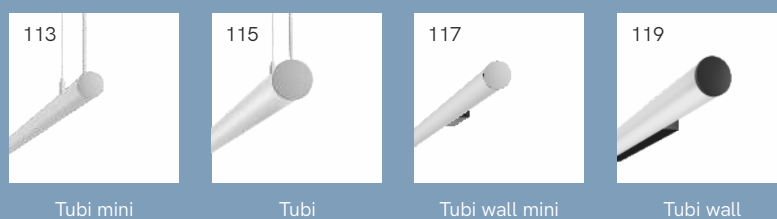


Urban



Urban




Urban E




Urban train



Urban train E




Urban fly




Urban fly E




Urban work



Urban work E



Urban asymmetric




Urban asymmetric E



Urban wall sensor




Urban track



Urban market



Urban 3PH



Urban closed

Volt



Volt 48V



Volt base



Volt 3 surface




Volt GU10 base




Volt 3 GU10 surface

Zero




Zero D




Zero T




Zero Q



Zero in XL



Zero out XL



Zero in



Zero out




Zero direct XL



Zero direct



Zero design



Zero up & down


Zoe




Zoe 3PH susp.




Zoe XL 3PH susp.



Zoe 48V mini



Zoe 48V mini susp.




Zoe 48V suspension



Zoe space



Zoe XL space

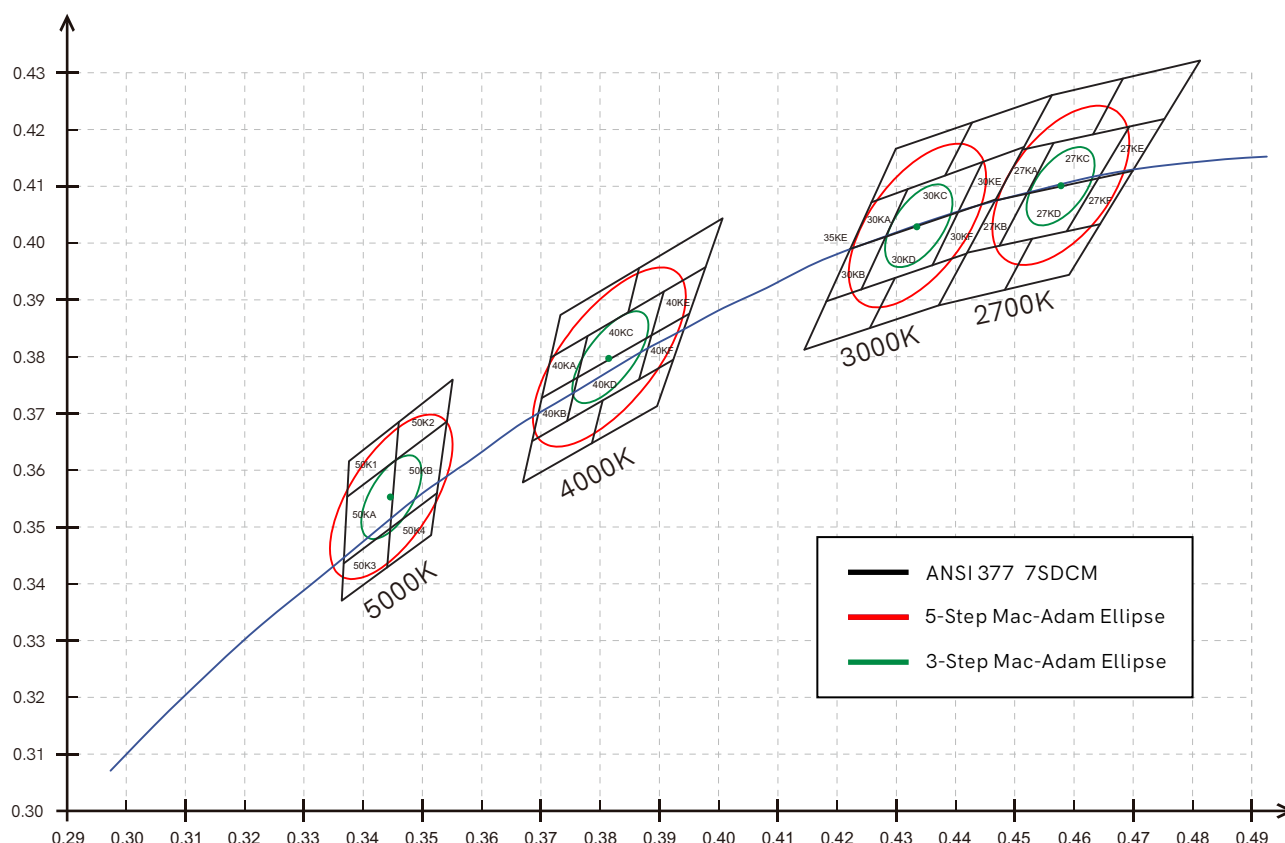

Steps MacAdam are a measurement that describes the color variation perceptible to the human eye. They are a series of ellipses that represent the changes in the different CCTs. The fewer MacAdam steps, the greater the perceived uniformity and consistency of color. All our products have 3 or 5 steps MacAdam.

ONE binning are groups of LEDs that are formed based on the same characteristics in light intensity and CCT. This ensures continuity in CCT and brightness in different manufacturing batches.

Los pasos **Steps MacAdam** son una medida que describe la variación de color perceptible por el ojo humano. Son una serie de elipses que representan los cambios en los diferentes CCT. Cuantos menos pasos MacAdam, mayor uniformidad y consistencia de color se percibe. Todos nuestros productos tienen 3 o 5 pasos MacAdam.

ONE binning son grupos de LEDs que se forman en base a las mismas características en intensidad luminosa y CCT. Esto asegura la continuidad en CCT y brillo en diferentes lotes de fabricación.

The effects of light

Efectos de la luz

The different CCT of light and colors affect human beings in a direct way in emotions, mood and sense of well-being. Warmer light tends to create a more welcoming and relaxing atmosphere. Cooler light tends to be more stimulating and can help maintain alertness and focus. Color-changing lighting can also attract attention to a certain area. In the same way, using an inappropriate CCT or changing color too quickly can negatively affect the users of the space, causing discomfort and stress.

Las distintas TMC de luz y colores afectan al ser humano de forma directa en las emociones, el estado de ánimo y la sensación de bienestar. La luz más cálida tiende a crear un ambiente más acogedor y relajante y luz más fría tiende a ser más estimulante y puede ayudar a mantener el estado de alerta y la concentración.

La iluminación que cambia de color también puede atraer la atención hacia una zona determinada.

Del mismo modo, utilizar un TAC inadecuado o cambiar de color demasiado rápido puede afectar negativamente a los usuarios del espacio, provocando incomodidad y estrés.



Custom system




The custom lighting

Our R&D and Production departments are responsible for designing special parts and customized solutions to meet the unique needs of our customers. Our commitment is to offer customized solutions with the highest quality and guaranteed compliance with regulations and certifications.

Our R&D services stand out for:

- Customized Design and Development: Our team of R&D experts works closely with customers to understand their specific challenges and needs. We use cutting-edge technology and creativity to conceive and design custom parts and solutions that perfectly fit your requirements.
 - Constant Innovation: We maintain a constant focus on innovation. We are committed to keeping up with the latest trends, technologies, and design practices to ensure that our solutions are always cutting-edge and effective.
 - Quality Production: Our production department is equipped with state-of-the-art machinery and a highly trained team. This allows us to carry out the manufacture of parts designed accurately and efficiently, maintaining high quality standards.
 - Adaptation to Regulations and Certifications: We understand the importance of complying with regulations and certifications. Our products and solutions are designed and manufactured in strict compliance with applicable standards, thus ensuring safety and compliance with current regulations.
 - Energy efficiency: With the need to change consumption patterns and in line with the sustainable development objectives of the 2030 Agenda, we are increasingly trying to develop environmental and sustainability policies, both in our products and services, as well as in all phases of the production chain.
 - Efficiency and cost-effectiveness: We take advantage of technology and innovation to optimize processes and maximize production efficiency. This not only guarantees quality, but also cost-effectiveness for our customers.
 - Personalized Customer Service: We pride ourselves on providing world-class customer service. We are available to answer your questions, adjust designs according to your changing needs, and provide exceptional after-sales service.
- When you trust our R&D and production department, you are choosing a complete solution tailored to your needs, backed by quality, innovation and commitment to regulations and certifications. We are ready to be your partner in the search for customized solutions of the highest quality. Contact us and find out how we can help you achieve your goals!

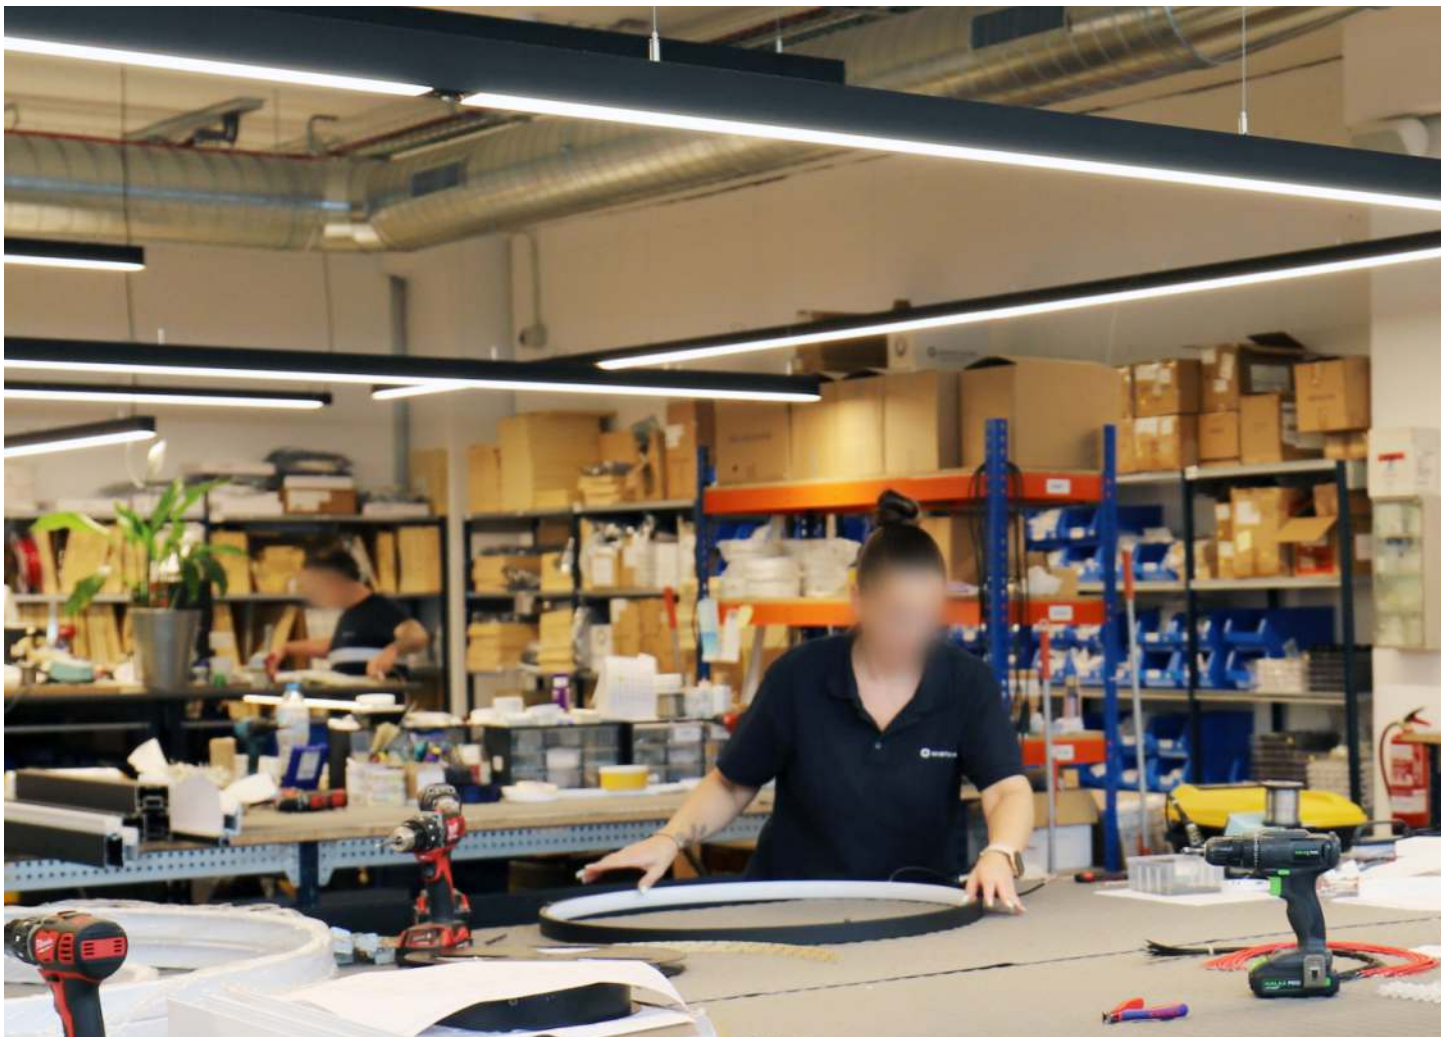


The custom lighting

Nuestros departamentos de I+D y de Producción son los encargados de diseñar piezas especiales y soluciones a medida para satisfacer las necesidades únicas de nuestros clientes. Nuestro compromiso es ofrecer soluciones personalizadas con la máxima calidad y garantía de cumplimiento de normativas y certificaciones.

Nuestros servicios de I+D destacan por:


- Diseño y Desarrollo Personalizado: Nuestro equipo de expertos en I+D trabaja de cerca con los clientes para comprender sus desafíos y necesidades específicas. Utilizamos tecnología de vanguardia y creatividad para concebir y diseñar piezas y soluciones a medida que se adapten perfectamente a sus requerimientos.
 - Innovación Constante: Mantenemos un enfoque constante en la innovación. Estamos comprometidos a mantenernos al tanto de las últimas tendencias, tecnologías y prácticas de diseño para asegurarnos de que nuestras soluciones sean siempre vanguardistas y eficaces.
 - Producción de Calidad: Nuestro departamento de producción cuenta con maquinaria de última generación y un equipo altamente capacitado. Esto nos permite llevar a cabo la fabricación de las piezas diseñadas de manera precisa y eficiente, manteniendo altos estándares de calidad.
 - Adaptación a Normativas y Certificaciones: Entendemos la importancia de cumplir con las normativas y certificaciones. Nuestros productos y soluciones son diseñados y fabricados con estricto cumplimiento de los estándares aplicables, garantizando así la seguridad y la conformidad con la normativa vigente.
 - Eficiencia energética: Con la necesidad de cambiar los modelos de consumo y en la línea de los objetivos de desarrollo sostenible de la Agenda 2030, cada vez más se intenta desarrollar políticas medioambientales y de sostenibilidad, tanto en nuestros productos y servicios, como en todas las fases de su cadena de producción.
 - Eficiencia y Costo-efectividad: Aprovechamos la tecnología y la innovación para optimizar procesos y maximizar la eficiencia en la producción. Esto no solo garantiza la calidad, sino también un costo razonable para nuestros clientes.
 - Atención al Cliente Personalizada: Nos enorgullece ofrecer un servicio al cliente de primer nivel. Estamos disponibles para atender sus preguntas, ajustar diseños según sus necesidades cambiantes y brindar un servicio postventa excepcional.
- Cuando confía en nuestro departamento de I+D y producción, está eligiendo una solución completa y adaptada a sus necesidades, respaldada por la calidad, la innovación y el compromiso con las normativas y certificaciones. Estamos listos para ser su socio en la búsqueda de soluciones personalizadas de la más alta calidad.
- ¡Contáctenos y descubra cómo podemos ayudarle a alcanzar sus objetivos!



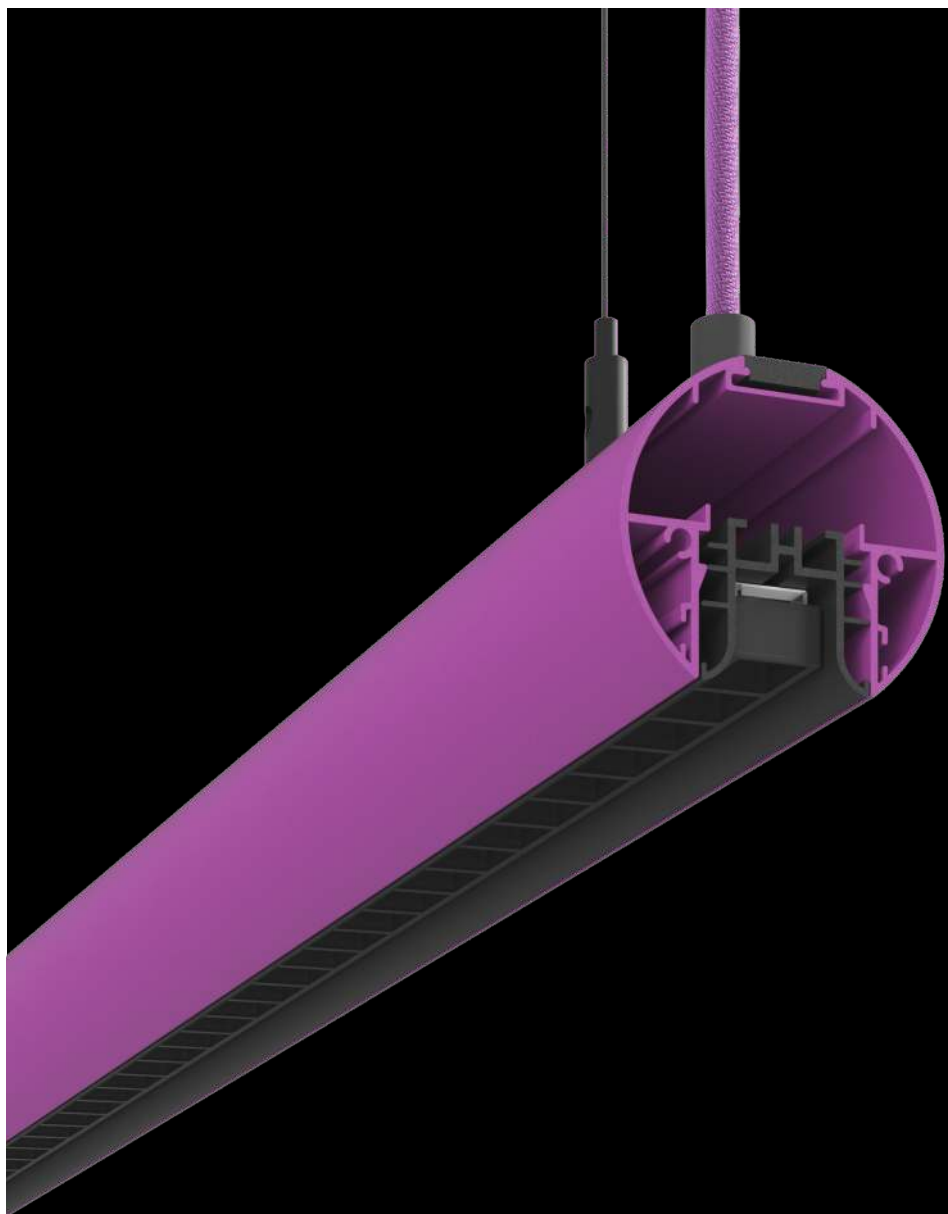

Do you want a custom-made **luminaire**?

Look for the Cutting symbol and consult our sales department!



Customization of the cut and
handling to the requested size.



Do you want to customize **your** luminaires?

Look for the Custom RAL symbol and consult our sales department!



Custom RAL

► VIDEO



	Model	Page	Power	Section Size	Installation	
	CIRCUS IN XL	147	37W/65W/94W	38x21 mm		Pendant
	CIRCUS OUT XL	147	37W/65W/94W	38x21 mm		Pendant
	CIRCUS IN	149	26W/44W/63W	30x11 mm		Pendant
	CIRCUS OUT	149	26W/44W/63W	30x11 mm		Pendant
NEW	COLOR TIME	85	43W/54W/64W/75W	39x75 mm		Pendant
	DAU	131	18W/23W/26W/30W	25x25 mm	 	Surface / Pendant
	DAU E	131	18W/23W/26W/30W	34x25 mm		Recessed
	DUAL	93	18-24W/28-35W/ 46-52W	39x125 mm		Pendant
NEW	DUMI	41	31-38W/38-47W/ 46-56W/53-74W	Ø68 mm		Pendant
NEW	DUMI DUAL	43	44-51W/54-63W/ 66-76W/76-97W	Ø68 mm		Pendant
	EVO	45	38W/47W/56W/74W	28x60 mm		Pendant
	EVO DUAL	49	49W/61W/73W/86W	24x75 mm	 	Pendant / Wall
	EVO E	52	10W/21W/31W/42W 52W/63W/73W	34x25 mm		Recessed
NEW	EVO E OPAL	53	2W/6W/12W/18W 24W/30W/36W/42W	34x25 mm		Recessed
	EVO FLY	47	44W/55W/66W/77W	24x75 mm		Pendant
	EVO MINI	51	38W/47W/56W/74W	28x25 mm	 	Surface / Pendant
	EVO MINI TRACK	55	9W/18W	28x25 mm		Track
	EVO R	51	38W/47W/56W/74W	35x25 mm	 	Surface / Pendant
	EVO TRACK	57	38W/56W	90x57 mm		Track
	FILTER	109	32W/120W	Ø60 mm		Pendant
NEW	FILTER LINE	107	48W/64W/80W 69W/92W/120W	Ø60 mm		Pendant
	FLASH	171	16W/27W/35W/ 46W/55W	18x49 mm		Wall
	FOREST	91	31W/38W/46W/53W	64x95 mm		Pendant
	GRIP	121	26W/33W/39W/46W	Ø28 mm		Pendant
	HORIZON	167	48W-288W	15 mm		Pendant
	KAA	163	90W/180W/300W	Ø25 mm		Pendant


CRI	CCT					IP	Standard finishes				
≥90 CRI	2700K	3000K	4000K	RGB-W	CCT	20 IP	White	Black	Matt Gold	Silver	
≥90 CRI	2700K	3000K	4000K	RGB-W	CCT	20 IP	White	Black	Matt Gold	Silver	
≥90 CRI	2700K	3000K	4000K	RGB-W	CCT	20 IP	White	Black	Matt Gold	Silver	
≥90 CRI	2700K	3000K	4000K	RGB-W	CCT	20 IP	White	Black	Matt Gold	Silver	
≥95 CRI	2700K	3000K	4000K	CCT		40 IP	White Red	Black Violet	Gray Pastel blue	Green Light blue Orange	
≥90 CRI	2700K	3000K	4000K	5000K	RGB-W CCT	20 IP	White	Black			
≥90 CRI	2700K	3000K	4000K	5000K	RGB-W CCT	20 IP	White	Black			
≥95 CRI	2700K	3000K	4000K	5000K		40 IP	White	Black			
≥95 CRI	2700K	3000K	4000K	CCT		40 IP	White Red	Black Violet	Gray Pastel blue	Green Light blue Orange	
≥95 CRI	2700K	3000K	4000K	CCT		40 IP	White Red	Black Violet	Gray Pastel blue	Green Light blue Orange	
≥90 CRI	2700K	3000K	4000K	RGB-W CCT	40 IP	White	Black				
≥80 CRI	2700K	3000K	4000K	RGB-W	40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K	RGB-W CCT	40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K		40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K	CCT	40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K		40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K		40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K	CCT	40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K		40 IP	White	Black				
≥90 CRI	2700K	3000K	4000K	RGB	20 IP	White	Black				
≥90 CRI	2700K	3000K	4000K	RGB	20 IP	White	Black				
≥80 CRI	2700K	3000K	4000K	6000K	20 IP	White	Black	Alum.			
≥95 CRI	2700K	3000K	4000K	5000K	CCT	40 IP	Wood				
≥90 CRI	2700K	3000K	4000K	RGB	CCT	40 IP		Black			
≥90 CRI	2700K	3000K	4000K		20 IP	White	Black				
≥90 CRI	2400K	2700K	3000K	4000K	CCT	40 IP	White	Black			

	Model	Page	Power	Section Size	Installation	
	KAA LINE	165	30W/60W/100W	Ø25 mm		Pendant
	KUBO	95	31W/38W/46W/54W	36,5x34 mm	 	Surface / Pendant
	KUBO E	95	31W/38W/46W/54W	50x35 mm		Recessed
	LIFT	169	33W/42W/51W/59W 16W/27W/35W	35x61,7 mm	 	Pendant / Wall
NEW	LINSTR	103	8W/12W/16W	Ø36 mm		Wall
NEW	LUXOR	105	24W/28W/34W/40W	Ø36 mm		Wall
	MINIMUS	125	25W/31W/37W/43W	16x25 mm	 	Surface / Pendant
	MIRROW	99	85W/94W	36,5x33,5 mm		Pendant
	NEXUS	84	46W/70W	39x75 mm		Pendant
	NYNETO	123	16W/20W/24W/28W	10x12 mm		Pendant
NEW	PUZZLE	97	8W /10W/12W	36,5x33,5mm		Pendant
	QUICK	129	20W/30W/41W/ 51W/61W/71W	60x86 mm		Wall
	SQUARE	133	43W/62W	25x25 mm		Pendant
	TAX	101	52W/64W	36,5x33,5 mm		Pendant
	TIME	83	31W/46W/69W	39x75 mm	 	Surface / Pendant
	TIME E	83	31W/46W/69W	54x75 mm		Recessed
	TIME TRACK	89	15W/23W/31W	39x75 mm		Track
	TIME WALL SENSOR	87	15W/23W/31W	39x75 mm		Wall
	TRITON	173	21W/41W/61W	47x66 mm		Surface
	TRITON DOWN	175	46W/57W/69W/ 80W/103W	47x66 mm	 	Surface / Pendant
	TUBI	115	35W/44W/53W/62W	Ø62 mm		Pendant
NEW	TUBI MINI	113	21W/27W/32W/37W	Ø40 mm		Pendant
	TUBI WALL	119	35W/44W/53W	Ø62 mm		Wall
NEW	TUBI WALL MINI	117	21W/27W/32W/37W	Ø40 mm		Wall
	TUNDRA	151	77W/112W	21x38 mm		Pendant
	URBAN	60	46W/57W/69W/ 80W/103W	58x68 mm	 	Surface / Pendant

CRI	CCT						IP	Standard finishes			
≥90 CRI	2400K	2700K	3000K	4000K	RGB-W	CCT	40 IP	White	Black	Matt Gold	
≥95 CRI	2700K	3000K	4000K	5000K	RGB-W	CCT	20 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	RGB-W	CCT		40 IP	White	Black		
≥90 CRI	2700K	3000K	4000K	RGB-W	CCT		40 IP	White	Black		
≥95 CRI	2400K	2700K	3000K	4000K			55 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	RGB	CCT		20 IP		Black		
≥90 CRI	2700K	3000K	4000K				40 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	RGB-W	CCT		20 IP	White	Black		
≥95 CRI	CCT						40 IP	White	Black	Gray	
≥90 CRI	2700K	3000K	4000K				20 IP	White	Black		
≥90 CRI	2700K	3000K	4000K	RGB	CCT		40 IP	White	Black		
≥90 CRI	2700K	3000K	4000K	RGB	CCT		20 IP	White	Black		
≥90 CRI	2700K	3000K	4000K	RGB-W	CCT		20 IP	White	Black	Matt Gold	Silver
≥95 CRI	2700K	3000K	4000K	RGB-W	CCT		20 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	5000K			40 IP	White	Black	Gray	
≥95 CRI	2700K	3000K	4000K	5000K			40 IP	White	Black	Gray	
≥95 CRI	2700K	3000K	4000K	5000K			20 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	5000K			20 IP	White	Black	Gray	
≥80 CRI	2700K	3000K	4000K				65 IP	Black			
≥95 CRI	2700K	3000K	4000K	5500K			65 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	5000K	RGB-W	CCT	40 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	RGB	CCT		40 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	RGB-W	CCT		40 IP	White	Black		
≥95 CRI	2700K	3000K	4000K	RGB	CCT		40 IP	White	Black		
≥80 CRI	2700K	3000K	4000K	RGB-W	CCT		20 IP	White	Black	Matt Gold	Silver
≥95 CRI	2700K	3000K	4000K	5000K	CCT		40 IP	White	Black	Gray	Matt Gold Corten Copper



	Model	Page	Power	Section Size	Installation	
NEW	URBAN 3PH	81	-	59x69 mm		Track
	URBAN ASYMMETRIC	73	25W/31W/37W/ 43W/55W	58x68 mm	 	Surface / Pendant
	URBAN ASYMMETRIC E	73	25W/31W/37W/ 43W/55W	75x68 mm		Recessed
NEW	URBAN CLOSED	81	-	59x69 mm		Surface
	URBAN E	65	46W/57W/69W/ 80W/103W	75x68 mm		Recessed
	URBAN FLY	69	2X14W/3X14W 4X14W/6X14W	58x68 mm		Pendant
	URBAN FLY E	69	2X14W/3X14W 4X14W/6X14W	75x68 mm		Recessed
	URBAN MARKET	79	45W/55,5W/66W/ 76,5W/97,5W	58x68 mm	 	Surface / Pendant
	URBAN TRACK	77	21W/32W/43W	58x68 mm		Track
	URBAN TRAIN	67	46W/57W/69W/80W	58x68 mm		Pendant
	URBAN TRAIN E	67	46W/57W/69W/80W	75x68 mm		Recessed
	URBAN WALL SENSOR	75	21W/32W/43W	58x68 mm		Wall
	URBAN WORK	71	35W/43W/51W/ 59W/97,5W	58x68 mm		Pendant
	URBAN WORK E	71	35W/43W/51W/ 59W/97,5W	75x68 mm		Recessed
	VISION	127	33W/42W/51W/59W	30x35 mm	 	Surface / Pendant
NEW	ZERO D	136	78W/120W/180W	11x30 mm		Pendant
	ZERO DESIGN	156-157	22W/m	36,5x33,5 mm	 	Surface / Pendant
	ZERO DIRECT	155	35W/55W/75W/94W 189W	36,5x33,5 mm	 	Surface / Pendant
	ZERO DIRECT XL	153	78W/105W/131W	95x90 mm		Pendant
	ZERO IN	143	26W/44W/63W/96W	11x30 mm		Pendant
	ZERO IN XL	139	37W/65W/94	21x38 mm		Pendant
	ZERO OUT	145	26W/44W/63W/96W	11x30 mm		Pendant
	ZERO OUT XL	141	37W/65W/94	21x38 mm		Pendant
NEW	ZERO Q	135	246W	11x30 mm		Pendant
NEW	ZERO T	137	148W /218W	11x30 mm		Pendant
NEW	ZERO UP & DOWN	161	90W/110W/130W/165W	36,5X70 mm		Pendant

CRI	CCT	IP	Standard finishes			
-	-	20 IP	White	Black		
≥95 CRI	2700K 3000K 4000K	40 IP	White	Black		
≥95 CRI	2700K 3000K 4000K	40 IP	White	Black		
-	-	20 IP	White	Black		
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White	Black	Gray	
≥90 CRI	2700K 3000K 4000K	40 IP	White	Black		
≥90 CRI	2700K 3000K 4000K	40 IP	White	Black		
80/93 CRI	3000K MEAT R HAM MEAT M 4000K FISH FRUIT BREAD	40 IP	White	Black		
≥95 CRI	2700K 3000K 4000K 5000K CCT	20 IP	White	Black		
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White	Black		
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White	Black		
≥95 CRI	2700K 3000K 4000K 5000K	20 IP	White	Black	Gray	
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White	Black		
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White	Black		
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White	Black		
≥90 CRI	2700K 3000K 4000K CCT	20 IP	White	Black	Matt Gold	Silver
≥80 CRI	2700K 3000K 4000K CCT	20 IP	White	Black	Gray	Matt Gold
≥80 CRI	2700K 3000K 4000K CCT	20 IP	White	Black	Matt Gold	Silver
≥80 CRI	2700K 3000K 4000K	20 IP	White	Black	Gray	
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White	Black	Matt Gold	Silver
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White	Black	Matt Gold	Silver
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White	Black	Matt Gold	Silver
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White	Black	Matt Gold	Silver
≥90 CRI	2700K 3000K 4000K CCT	20 IP	White	Black	Matt Gold	Silver
≥90 CRI	2700K 3000K 4000K CCT	20 IP	White	Black	Matt Gold	Silver
≥80 CRI	2700K 3000K 4000K CCT	20 IP	White	Black		

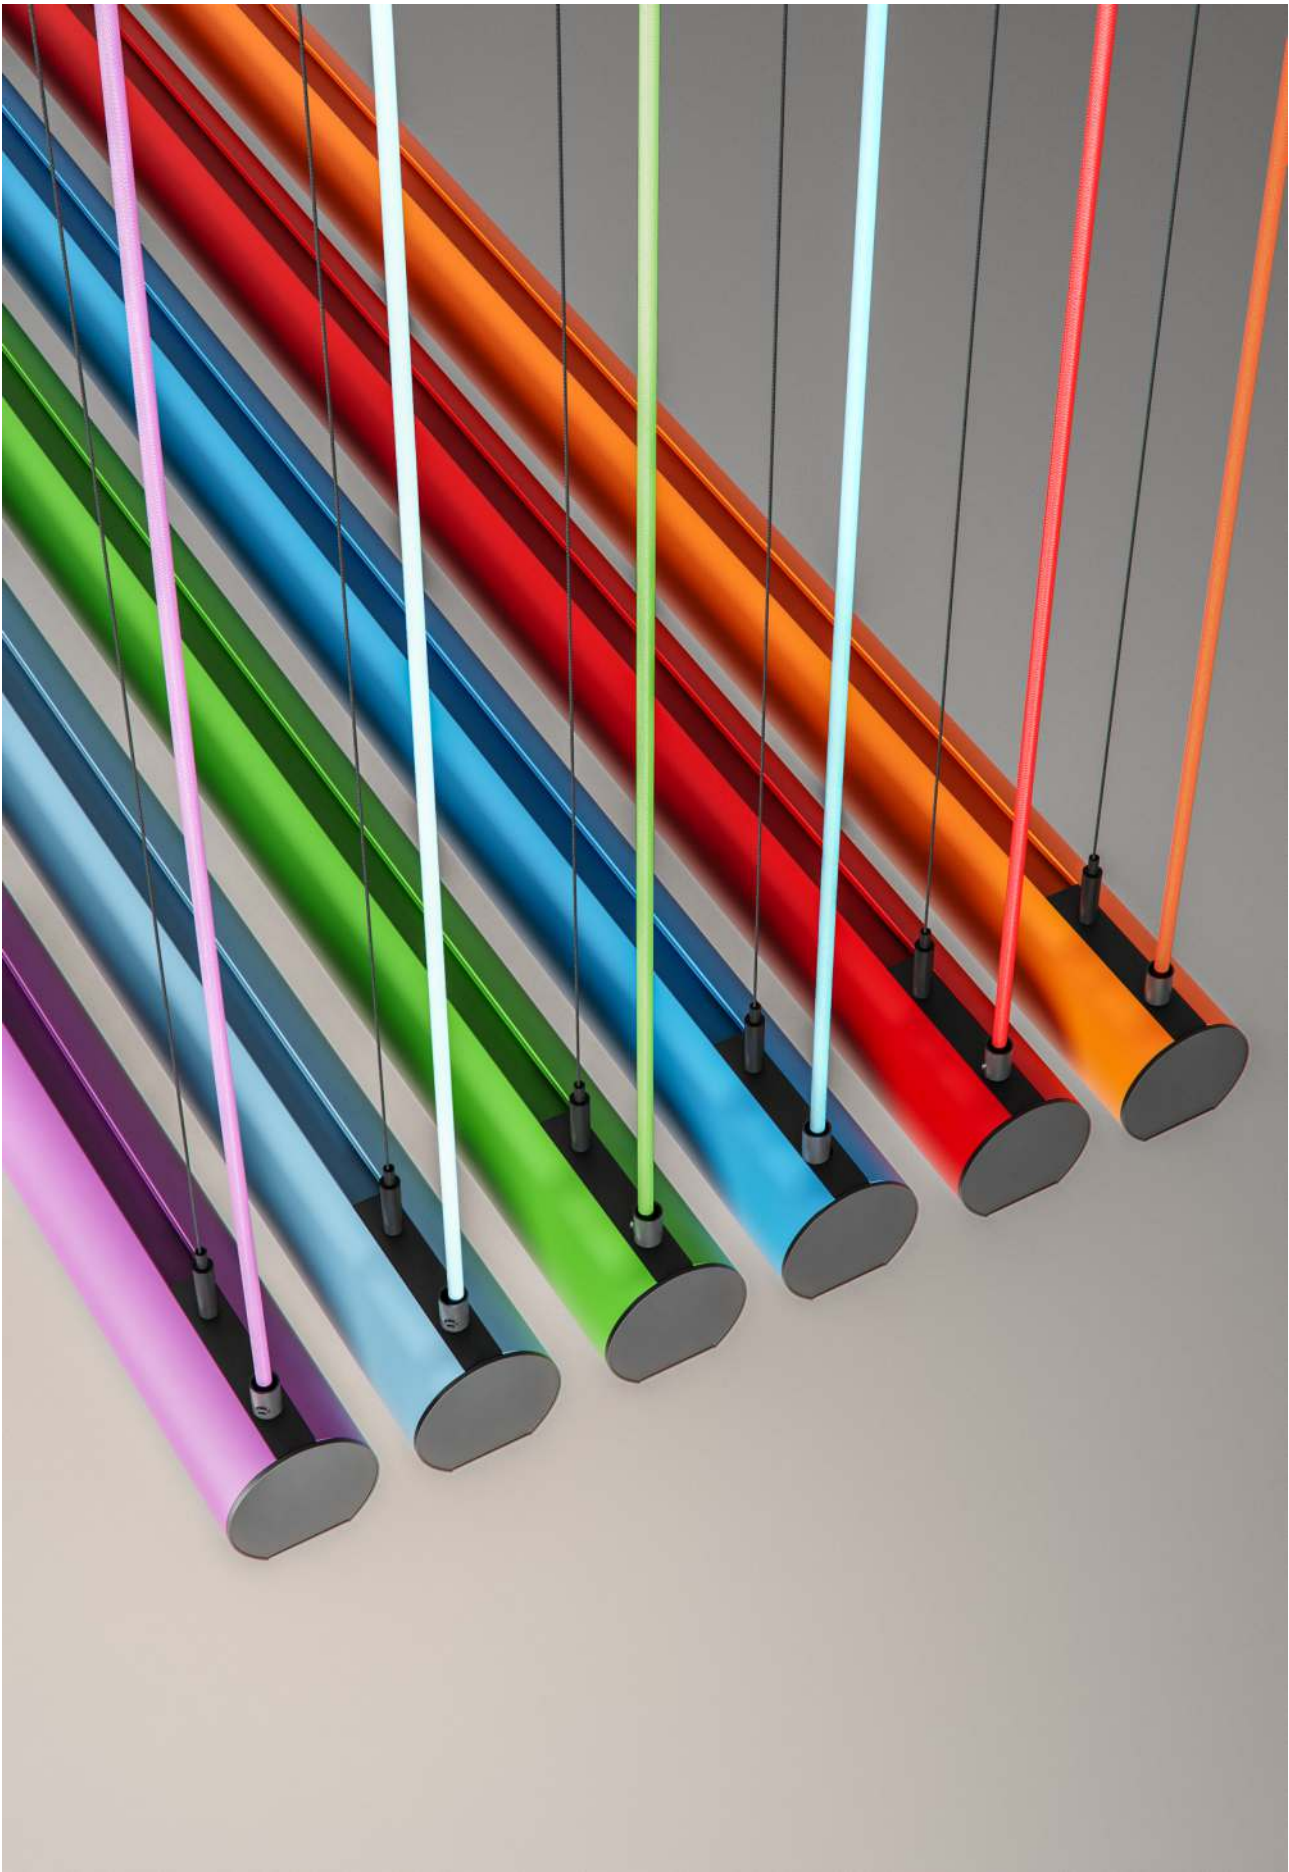

NEW

Dumi



*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories:  page 327  pages 326-333




Technical Information

Power	31-38W / 38-47W / 46-56W / 53-74W
Lumens	2.821 lm - 10.064 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	UGR & Opal/Black slats	CCT (lm/W)	Driver	Colour
Code D	UGR (78°)	3	1.170mm (31/38W) 3	2.700K (91-112 lm/W) 2	On / Off 1	☐ White (9003) 1
	Opal (112°)	5	1.450mm (38/47W) 4	3.000K (96-128 lm/W) 3	Triac 4	☒ Black (9005) 2
	Black slats (60°)	9	1.730mm (46/56W) 5	4.000K (103-136 lm/W) 4	Casambi 5	☒ Gray (7037) 3
			2.020mm (53/74W) 6	2.700-5.500K (95-105 lm/W) 9	Tuya 7	☒ Green (6018) 4
						☒ Orange (2009) 5
						☒ Red (3020) 6
						☒ Violet (4008) 7
						☒ Pastel blue (5024) 8
						☒ Light blue (5012) 9
						☒ Custom RAL

Code: D ☐ ☐ ☐ ☐ ☐ ☐



① Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY

50.000 HOURS

IP 40

UGR <19 (3) <17 (9)

230 VAC

PF >0,9




CRI ≥95

TRIAC DIMM



NEW

Dumi dual

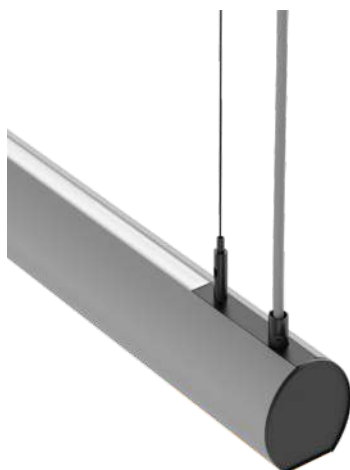

*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories:  page 327  pages 326-333




Technical Information

Power	44-51W / 54-63W / 66-76W / 76-97W
Lumens	4.004 lm - 13.192 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Down Rigid / Up Flex

Code	Diffuser (Angle)	Size (Power UGR & Opal/Black slats)	CCT (lm/W)	Driver	Colour
Code D	UGR (78°) P	1.170mm (44/51W) 3	2.700K (91-112 lm/W) 2	On / Off 1	☐ White (9003) 1
	Opal (112°) W	1.450mm (54/63W) 4	3.000K (96-128 lm/W) 3	Triac 4	☒ Black (9005) 2
	Black slats (60°) N	1.730mm (66/76W) 5	4.000K (103-136 lm/W) 4	Casambi 5	☒ Gray (7037) 3
		2.020mm (76/97W) 6	2.700-5.500K (95-105 lm/W) 9	Tuya 7	☒ Green (6018) 4
					☒ Orange (2009) 5
					☒ Red (3020) 6
					☒ Violet (4008) 7
					☒ Pastel blue (5024) 8
					☒ Light blue (5012) 9
					☒ Custom RAL


Code: **D** ☐ ☐ ☐ ☐ ☐ ☐





 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



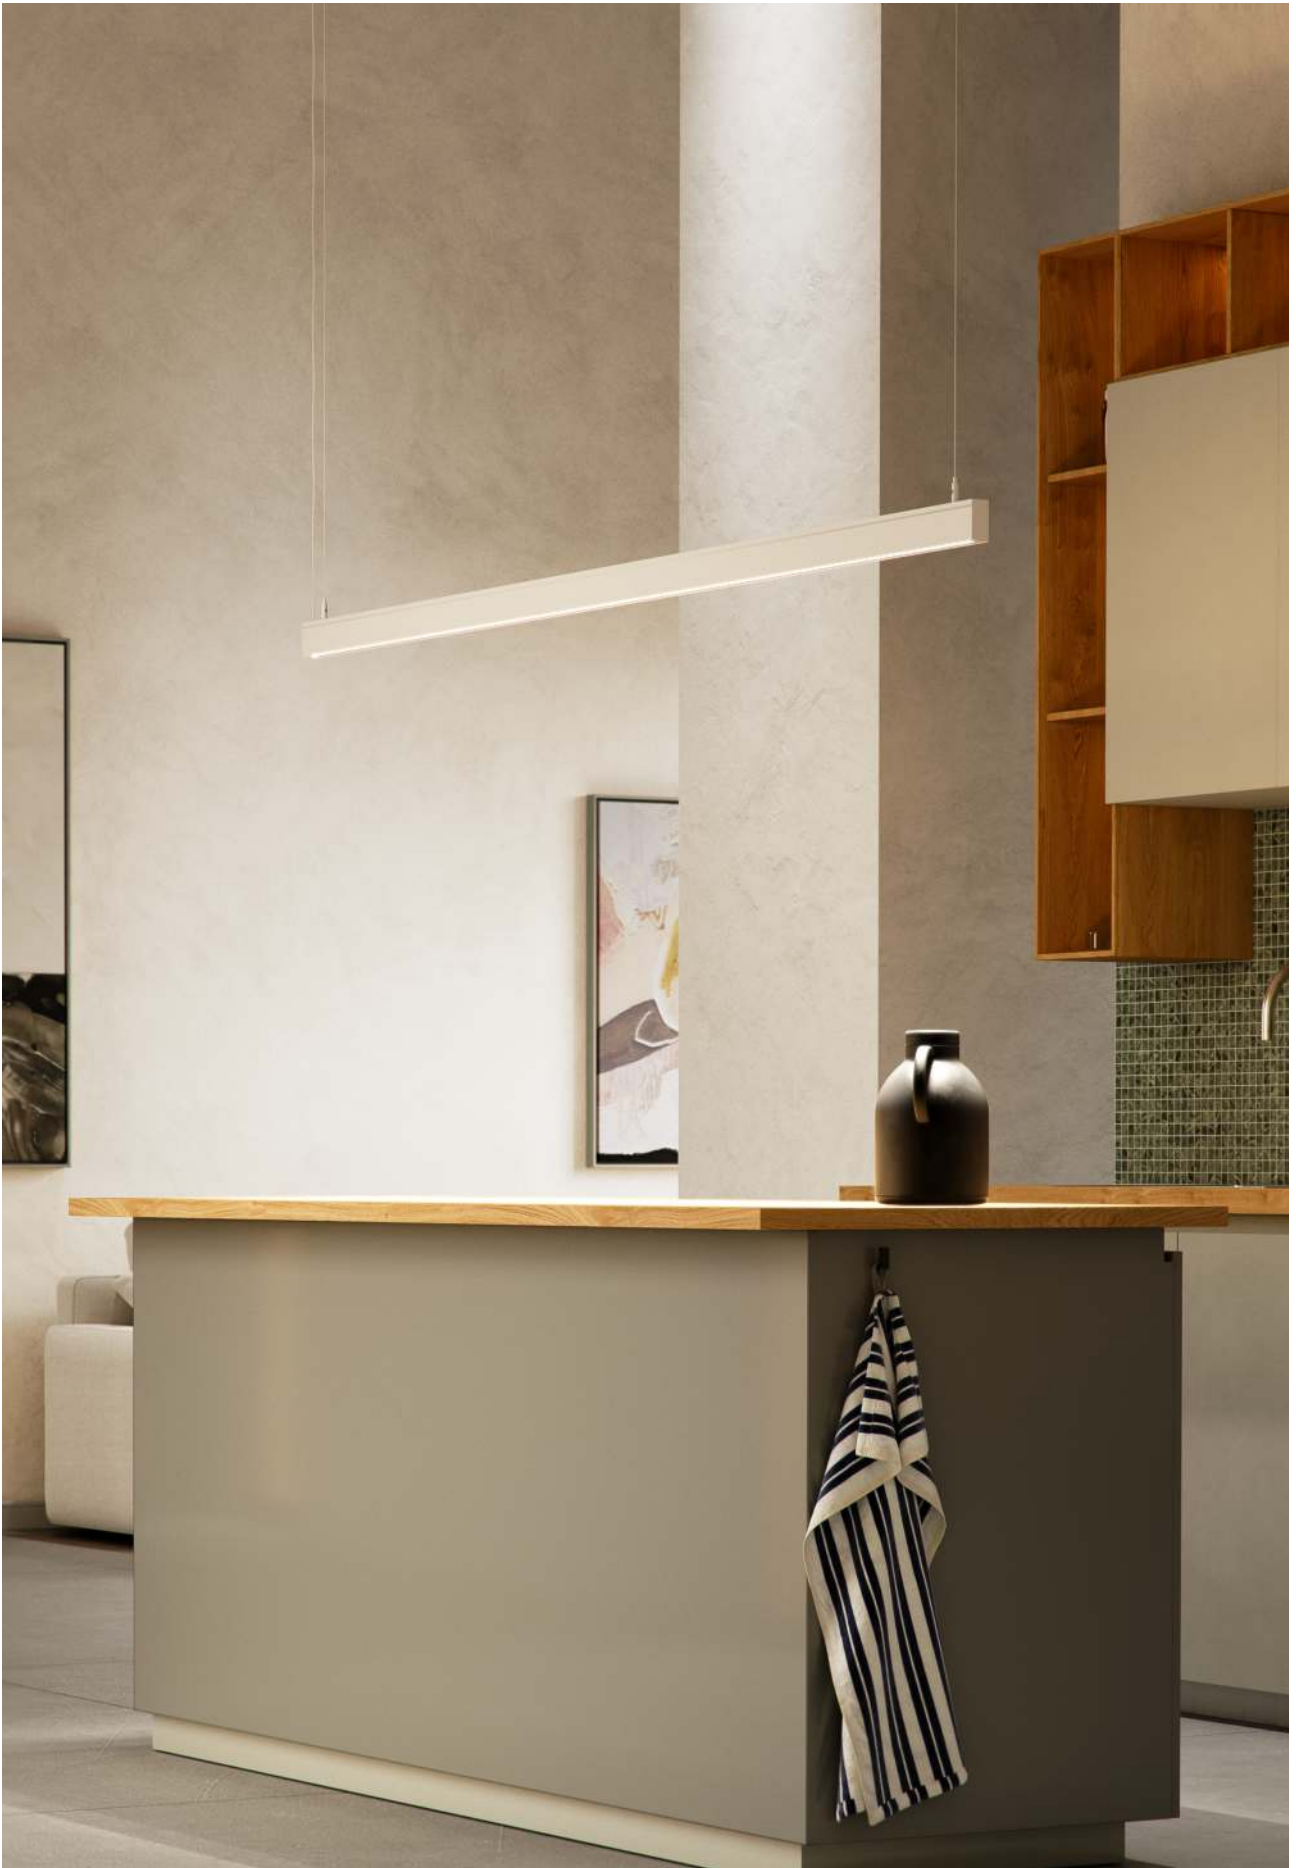

Evo



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	38W / 47W / 56W / 74W
Lumens	3.268 lm - 8.954 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 2	Black Slats (60°) N	1.170mm (38W) 2	2.700K (91-104 lm/W) 2	On / Off 1	White (9003) 1
	White Slats (60°) P	1.450mm (47W) 3	3.000K (96-109 lm/W) 3	Dali 2	Black (9005) 2
		1.730mm (56W) 4	4.000K (103-121 lm/W) 4	Push 3	Custom RAL
		2.290mm (74W) 6	RGB-W (86 lm/W) 8	Casambi 5	
			2.700-6.500K (95/105 lm/W) 9	Tuya 7	

Code: 2




Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.






Evo fly



Equipment



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  pages 326-333  pages 334-335




Technical Information

Power	44W / 55W / 66W / 77W
Lumens	3.872 lm - 9.317 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Down Rigid / Up Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Down Black Slats (60°) N	1.120mm (44W) 4	2.700K Down (91-104 lm/W) Up (88 lm/W) 2	On / Off 1	White (9003) 1
	Up Opal	1.400mm (55W) 5		Dali 2	Black (9005) 2
	Down White Slats (60°) P	1.680mm (66W) 6	3.000K Down (96-109 lm/W) Up (92 lm/W) 3	Push 3	Custom RAL
	Up Opal	1.960mm (77W) 7	4.000K Down (104-121 lm/W) Up (96 lm/W) 4	Casambi 5	
			2.700K Down (95-105 lm/W) 5		
			6.500K Up (100 lm/W)		

Code: 4




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi.






Evo dual



Evo dual wall



Equipment

Control accessories:



page 327



pages 326-333



pages 334-335

Ø60x28mm



Pendant



Wall




*Finished luminaire. Includes power cable and end caps.

Technical Information

Power	49W / 61W / 73W / 86W
Lumens	4.410 lm - 11.696 lm
Installation	Pendant / Wall
Material	Aluminium 6063
PCB	Flex / Rigid

Code	Installation	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Pendant 3	1.130mm (49W) 4	Down-Up 2.700K (124 lm/W) 2	On / Off 1	White (9003) 1
	Wall 7	1.410mm (61W) 5	Down-Up 3.000K (128 lm/W) 3	Dali 2	Black (9005) 2
		1.690mm (73W) 6	Down-Up 4.000K (136 lm/W) 4	Push 3	Custom RAL
		1.970mm (86W) 7	Down-Up RGB (100 lm/W) 8	Casambi 5	
			Down-Up 1.800-4.000K (90 lm/W) 9	Tuya 7	
			Down 1.800-4.000K Up RGB C		
			Down 2.700K Up RGB D		
			Down 3.000K Up RGB T		
			Down 4.000K Up RGB Q		


Code: 5



Consult delivery terms and conditions.

*Create your code according to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.



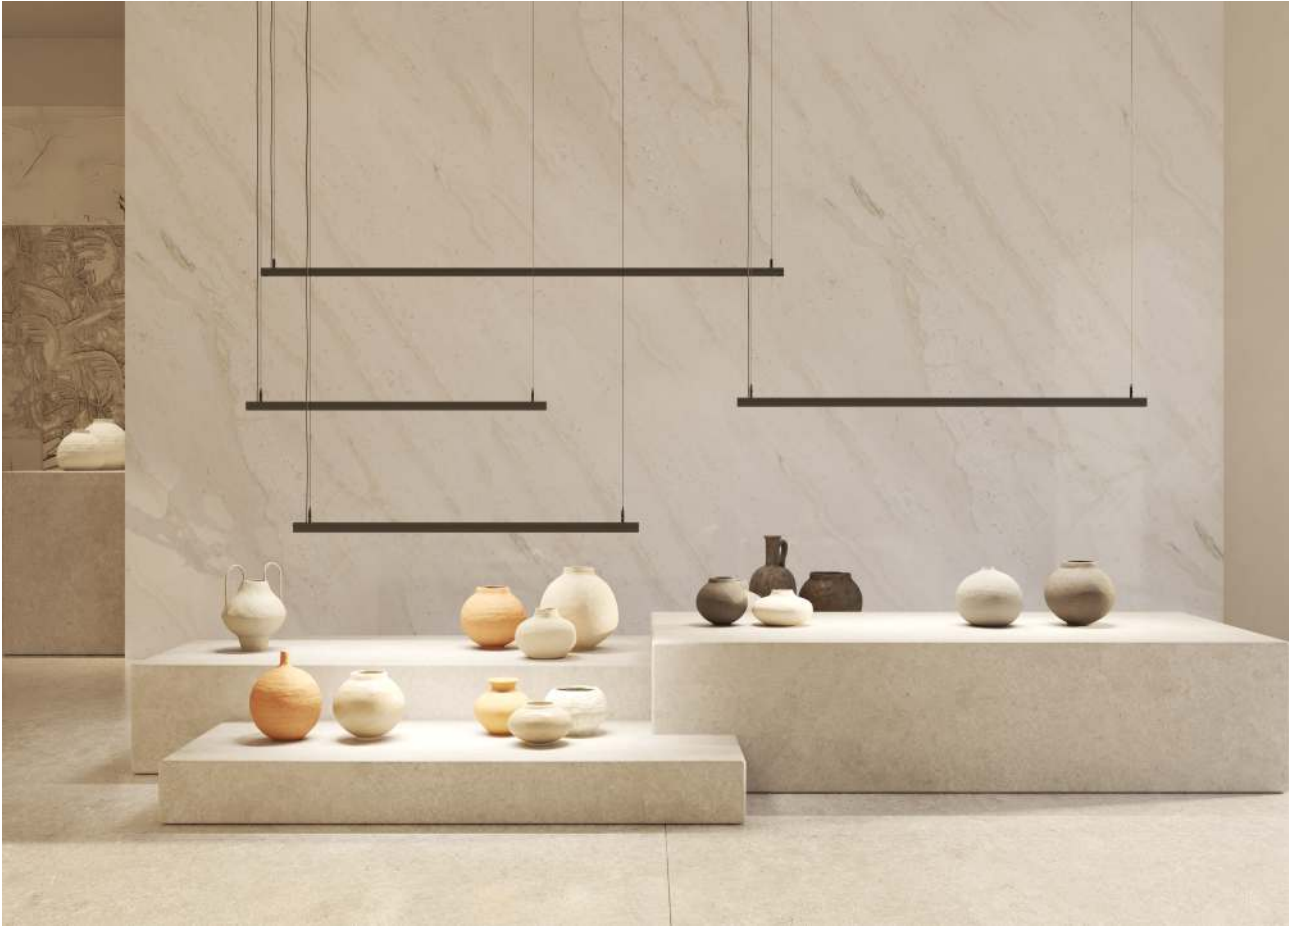



Evo mini




Evo R



Equipment

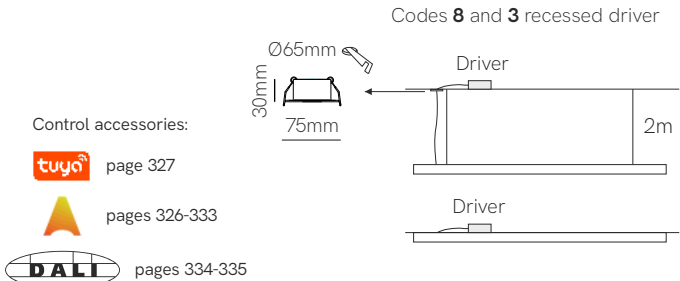

Control accessories:
 page 327
 pages 326-333
 pages 334-335




*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

Technical Information

Power	38W / 47W / 56W / 74W
Lumens	3.458 lm - 8.954 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Evo mini recessed	Black Slats (60°) N	1.170mm (38W) 2	2.700K (91-104 lm/W) 2	On / Off 1	☐ White (9003) 1
	White Slats (60°) P	1.450mm (47W) 3	3.000K (96-109 lm/W) 3	Dali 2	☐ Black (9005) 2
Evo mini surface		1.730mm (56W) 4	4.000K (103-121 lm/W) 4	Push 3	☒ Custom RAL
Evo r recessed		2.290mm (74W) 6	2.700-6.500K (95-105 lm/W) 9	Casambi 5	
Evo r surface				Tuya 7	

Code:







 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.



Evo E



*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335

Technical Information

Power	10W / 21W / 31W / 42W / 52W / 63W / 73W
Lumens	860 lm - 8.833 lm
Installation	Recessed
Material	Aluminium 6063
PCB	Rigid





Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Black Slats (30°) C	280mm (10W) 1	2.700K (91-104 lm/W) 2	On / Off 1	☐ White (9003) 1
	White Slats (30°) F	560mm (21W) 2	3.000K (96-109 lm/W) 3	Dali 2	☒ Black (9005) 2
	Black Slats (60°) N	840mm (31W) 3	4.000K (104-121 lm/W) 4	Push 3	☒ Custom RAL
	White Slats (60°) P	1.120mm (42W) 4	RGB-W (86 lm/W) 8	Casambi 5	
		1.400mm (52W) 5	2.700-6.500K (95-105 lm/W) 9	Tuya 7	
		1.680mm (63W) 6			
		1.960mm (73W) 7			

Code: 5

 RoHS                                     

NEW

Evo E opal



*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Control accessories:  pages 326-333

 pages 334-335




Technical Information

Power	2W / 6W / 12W / 18W / 24W / 30W / 36W / 42W
Lumens	200 lm - 4.620 lm
Installation	Recessed
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code	5	Opal (112°)	0		
		100mm (2W)	0	2.700K (100 lm/W)	2
		280mm (6W)	1	3.000K (105 lm/W)	3
		560mm (12W)	2	4.000K (110 lm/W)	4
		840mm (18W)	3		
		1.120mm (24W)	4		
		1.400mm (30W)	5		
		1.680mm (36W)	6		
		1.960mm (42W)	7		
				On / Off	1
				Casambi	5
				Dali / Push	8
					1
					2
					Custom RAL

Code: 5 0




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences.





Evo mini track



Equipment



*Finished luminaire.




Technical Information

Power	9W / 18W
Lumens	819 lm - 2.178 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 6	Black Slats (60°) N	310mm (9W) 1	2.700K (91-104 lm/W) 2	On / Off 1	White (9003) 1
	White Slats (60°) P	590mm (18W) 8	3.000K (96-109 lm/W) 3	Triac 4	Black (9005) 2
			4.000K (104-121 lm/W) 4		Custom RAL

Code: 6




ⓘ Consult delivery terms and conditions.
*Create your code according to your preferences.





Evo track

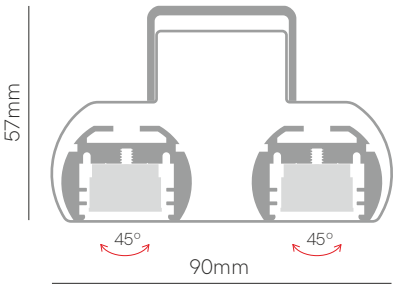

Equipment



*Finished luminaire.




Technical Information

Power	38W / 56W
Lumens	3.458 lm - 6.776 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W)	Driver	Colour
Code 9	Black Slats (30°) C	610mm (38W) 2	2.700K (91-104 lm/W) 2	On / Off 1	White (9003) 1
	White Slats (30°) F	890mm (56W) 3	3.000K (96-109 lm/W) 3		Black (9005) 2
	Black Slats (60°) N		4.000K (103-121 lm/W) 4		Custom RAL
	White Slats (60°) P				

Code: 9 1



ⓘ Consult delivery terms and conditions.
*Create your code according to your preferences.









Urban collection

Urban

Control accessories:  page 327 pages 326-333 pages 334-335

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	4.830 lm - 14.008 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 6	UGR (78°) 4	1.130mm (46W) 3	2.700K (112 lm/W) 2	On / Off 1	 White (9003) 1
	Opal (112°) 5	1.410mm (57W) 4	3.000K (128 lm/W) 3	Dali 2	 Black (9005) 2
		1.690mm (69W) 5	4.000K (136 lm/W) 4	Push 3	 Gray (9006) 3
		1.970mm (80W) 6	5.000K (136 lm/W) 5	Casambi 5 ⓘ	 Matt Gold 4
		2.530mm (103W) 7	2.700-5.500K (105 lm/W) 9	Tuya 7 ⓘ	 Corten 6
				 Copper 7 ⓘ	
					 Custom RAL ⓘ

Code: **6**       Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Accessories

									
End caps ☐ 40721 ☐ 40722 ☐ 40723	Joint 180° ☐ 40220	Joint 90° ☐ 40550	Joint 90° ☐ 40610	Wall bracket ☐ 40851 ☐ 40852 ☐ 40853	Trimless ☐ 40669	Base 3x0,75 (2,5m) Ø60x28mm ☐ 40881 ☐ 40882 ☐ 40883	Base 5x0,5 (2,5m) Ø60x28mm ☐ 40991 ☐ 40992 ☐ 40993	Ceiling suspension ☐ 40780	Suspension Kit ☐ 40795 (5m)

CE RoHS  

Accessories pages 176-179.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 |    | 3,37m Max |   | PUSH | 

Urban emergency



Code	Diffuser (Angle)	Size	CCT (lm/W)	Emergency + Driver	Colour
Code 6	UGR (78°) 4	1.130mm 3	2.700K (112 lm/W) 2	Emergency + On / Off K1	White (9003) 1
	Opal (112°) 5	1.410mm 4	3.000K (128 lm/W) 3	Emergency + Dali K2	Black (9005) 2
		1.690mm 5	4.000K (136 lm/W) 4	Emergency + Push K3	Custom RAL
		1.970mm 6	5.000K (136 lm/W) 5	Emergency + Casambi K5	
		2.530mm 7	2.700-5.500K (105 lm/W) 9		

Code: 6

 Emergency
4.000K 200lm |  1/3H.
EN 60598-2-2

Urban sensor casambi




Urban sensor incorporates a presence and illuminance (brightness) sensor, this works with the CASAMBI wireless control system via Bluetooth. The equipment can be configured in different ways to activate scenes of any luminaire of the CASAMBI network by presence or illuminance.

Urban sensor incorpora un detector de presencia e iluminancia (luminosidad), este funciona con el sistema de control inalámbrico CASAMBI mediante Bluetooth. El equipo se puede configurar de diferentes maneras para activar escenas de cualquier luminaria de la red CASAMBI por presencia o iluminancia.

Code	Diffuser (Angle)	Size	CCT (lm/W)	Sensor + Driver	Colour
Code 6	UGR (78°) 4	1.130mm 3	2.700K (112 lm/W) 2	Sensor + Casambi 8	White (9003) 1
	Opal (112°) 5	1.410mm 4	3.000K (128 lm/W) 3		Black (9005) 2
		1.690mm 5	4.000K (136 lm/W) 4		Custom RAL

Code: 6




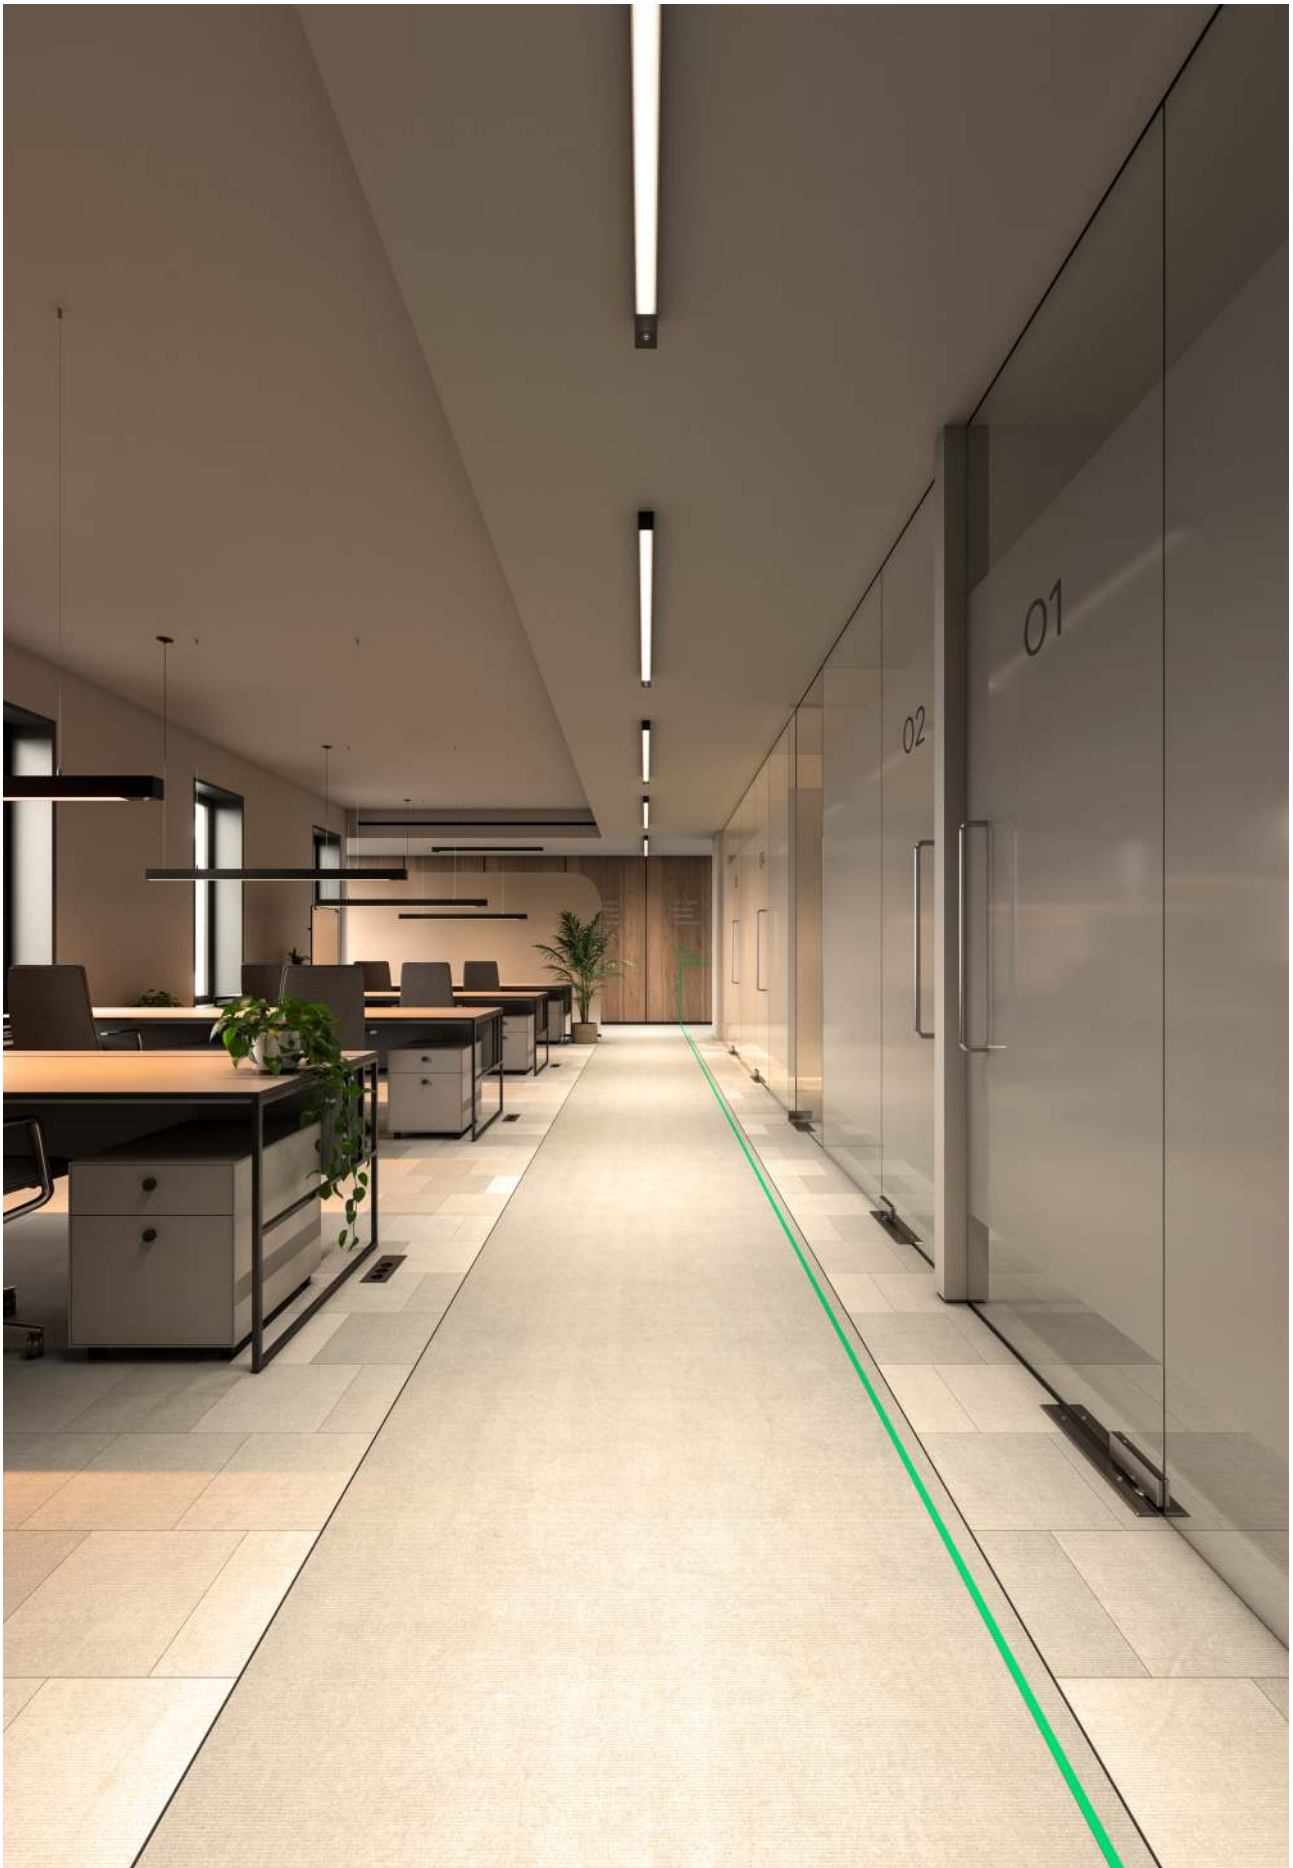





Urban E

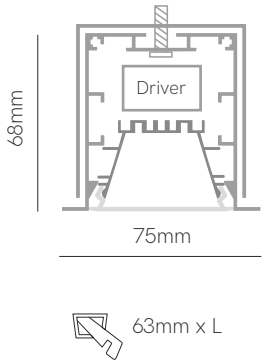

*Spring clips included.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information

Power	46W / 57W / 69W / 80W / 103W	Material	Aluminium 6063
Lumens	4.830 lm - 14.008 lm	PCB	Rigid
Installation	Recessed		

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver / Emergency	Colour
Code 3	UGR (78°) 4	1.130mm (46W) 3	2.700K (112 lm/W) 2	On / Off 1	☐ White (9003) 1
	Opal (112°) 5	1.410mm (57W) 4	3.000K (128 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.690mm (69W) 5	4.000K (136 lm/W) 4	Push 3	☐ Gray (9006) 3
		1.970mm (80W) 6	5.000K (136 lm/W) 5	Casambi 5	 Custom RAL
		2.530mm (103W) 7	2.700-5.500K (105 lm/W) 9	Tuya 7	
				Emergency + On / Off K1	
				Emergency + Dali K2	
				Emergency + Push K3	
				Emergency + Casambi K5	



Code: 3 


Accessories pages 176-179.

 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Accessories





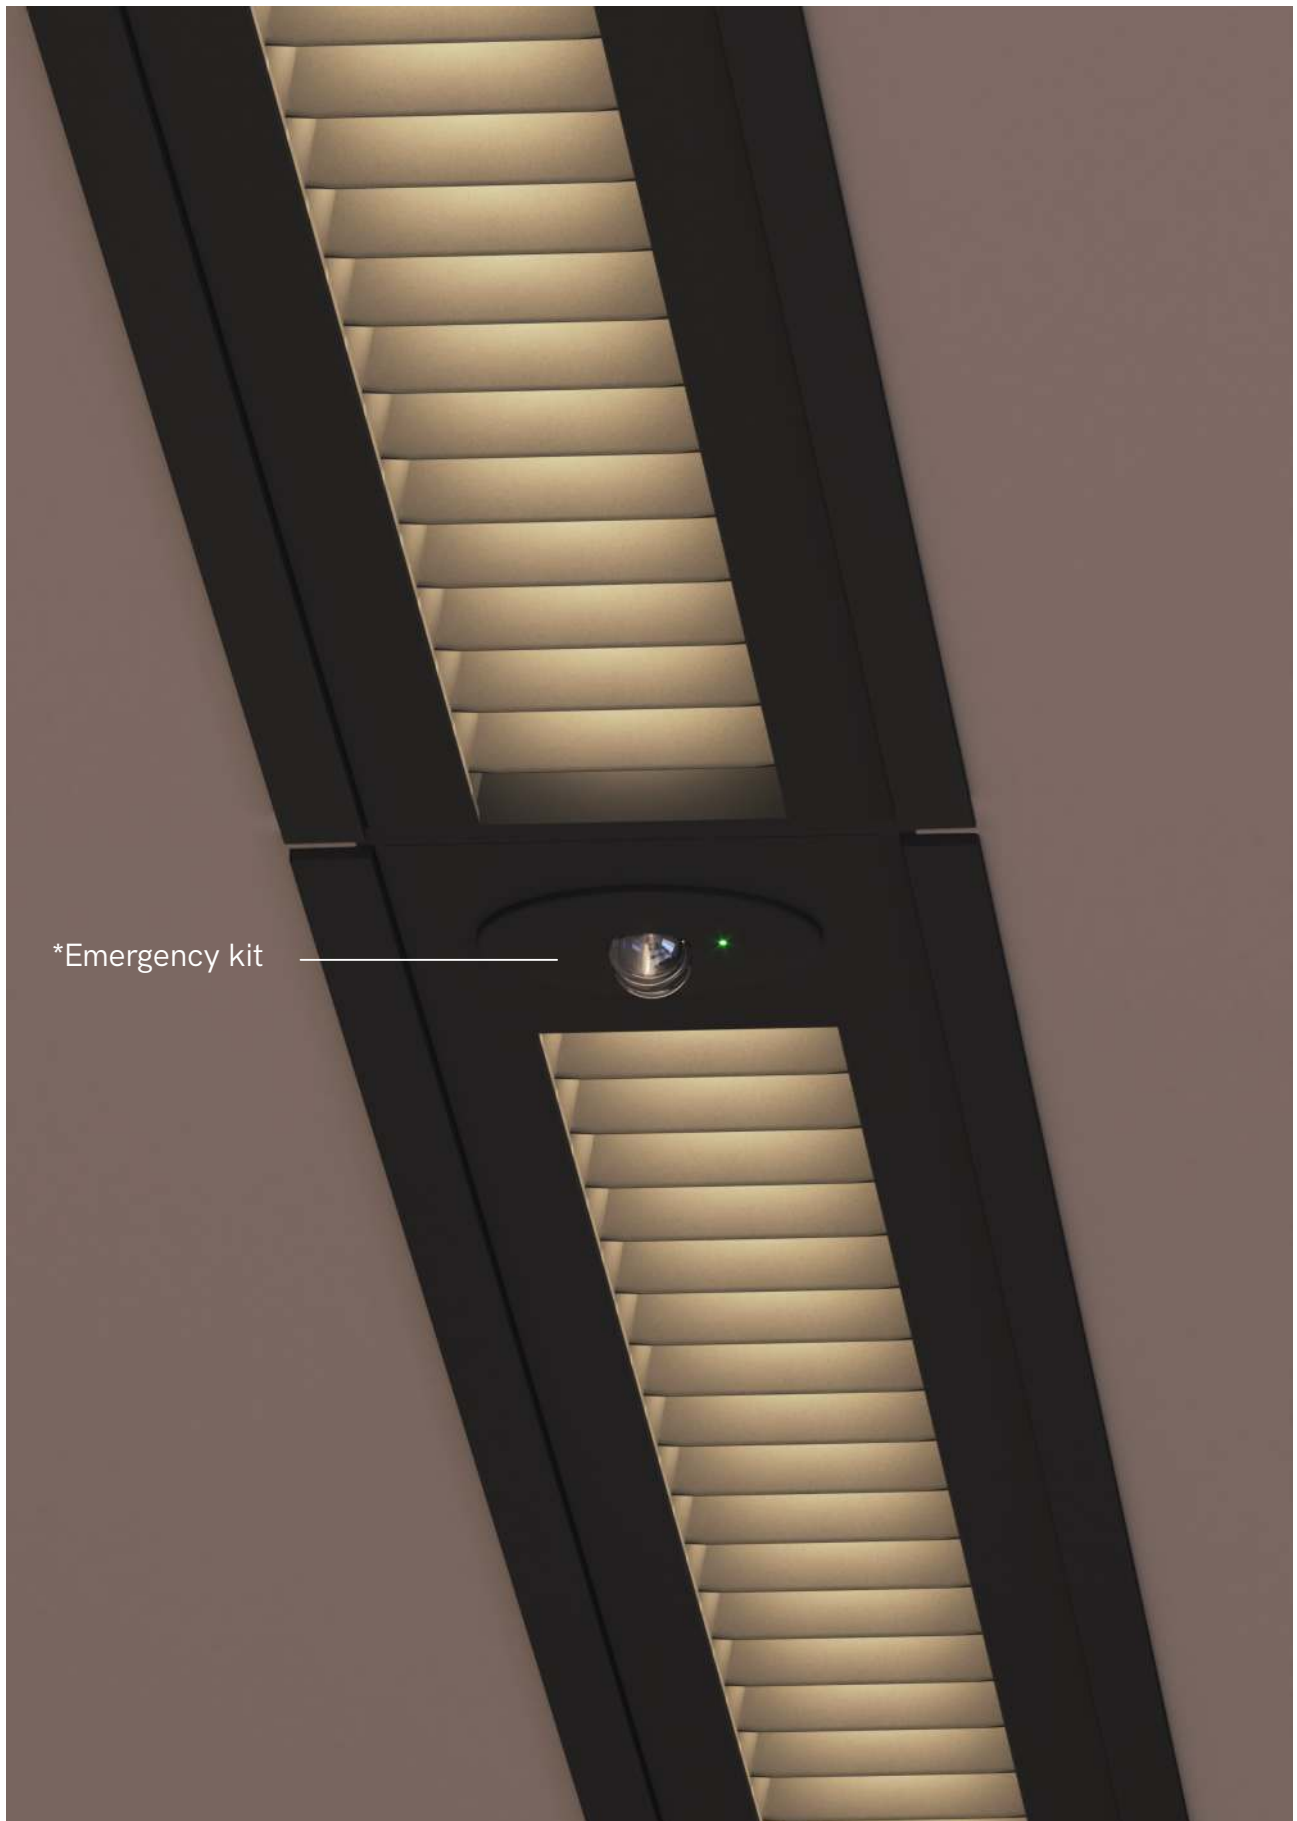

*Emergency kit


*Optional emergency kit with self-contained luminaire, high luminosity SMD LED with lens ideal for corridors and evacuation routes.

Urban train E



*Finished luminaire.
Includes clips, power cable and end caps.


Urban train



*Finished luminaire.
Includes suspension kit, power cable and end caps.

Control accessories:  pages 326-333

 pages 334-335



Technical Information

Power	46W / 57W / 69W / 80W	Material	Aluminium 6063
Lumens	4.830 lm - 10.880 lm	PCB	Rigid
Installation	Recessed / Pendant		

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver / Emergency	Colour
Train E 8	Black Slats (62°) 2	1.130mm (46W) 3	2.700K (112 lm/W) 2	On / Off 1	☐ White (9003) 1
Train 6	Alum. Slats (84°) 7	1.410mm (57W) 4	3.000K (128 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.690mm (69W) 5	4.000K (136 lm/W) 4	Push 3	☒ Custom RAL
		1.970mm (80W) 6	5.000K (136 lm/W) 5	Casambi 5	
			2.700-5.500K (105 lm/W) 9	Emerg.+ On / Off K1	
				Emerg.+ Dali K2	
				Emerg.+ Push K3	
				Emerg.+ Casambi K5	

Code: ☐ ☐ ☐ ☐ ☐ ☐

 Emergency
4.000K 200lm |  1/3H.
EN 60598-2-2

 RoHS  


Accessories pages 176-179.  Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi.



5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 |  |  | 3,37m Max |  |  |  | 



Urban fly E

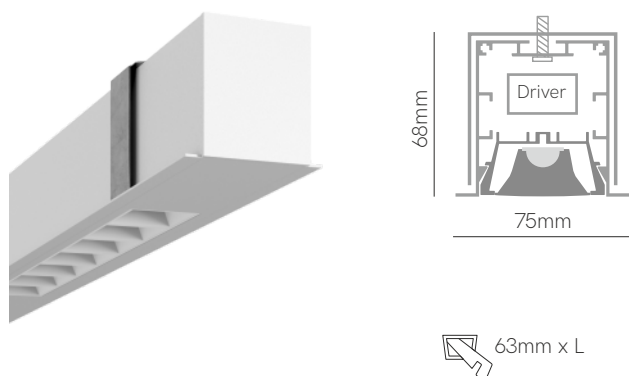


*Finished luminaire.
Includes clips, power cable and end caps.




Control accessories: pages 326-333

pages 334-335

Urban fly

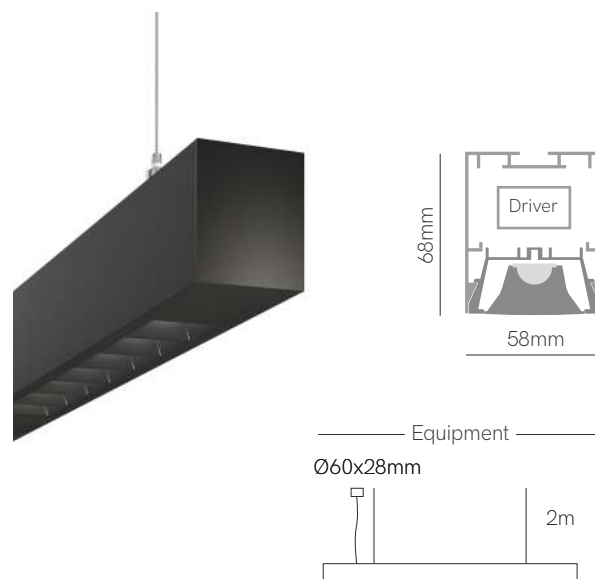

*Finished luminaire. Includes suspension kit, power cable and end caps.



Urban fly E



Urban fly



Technical Information

Power	2x14W / 3x14W / 4x14W / 6x14W
Lumens	3.192 lm - 11.424 lm
Installation	Recessed / Pendant

Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver / Emergency	Colour
Fly E 8	Optical (50°) 9	1.130mm (28W) 4	2.700K (114 lm/W) 2	On / Off 1	☐ White (9003) 1
Fly 6		1.690mm (42W) 5	3.000K (130 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.130mm (56W) 7	4.000K (136 lm/W) 4	Push 3	☒ Custom RAL
		1.690mm (84W) 8		Casambi 5	
				Emerg.+ On / Off K1	
				Emerg.+ Dali K2	
				Emerg.+ Push K3	
				Emerg.+ Casambi K5	

Code: ☐ **9** ☐ ☐ ☐ ☐ ☐

Emergency
4.000K 200lm | 1/3H.
EN 60598-2-2



RoHS

Accessories pages 176-179. Consult delivery terms and conditions.






Urban work E



63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

Urban work



*Finished luminaire.
Includes suspension kit, power cable and end caps.


Control accessories:



pages 326-333



pages 334-335



Technical Information

Power	35W / 43W / 51W / 59W / 97,5W
Lumens	3.675 lm - 11.505 lm
Installation	Recessed / Pendant


Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver / Emergency	Colour
Work E 7	Retracted (102°) 3	1.130mm (35W) 3	2.700K (105 lm/W) 2	On / Off 1	 White (9003) 1
Work 6		1.410mm (43W) 4	3.000K (112 lm/W) 3	Dali 2	 Black (9005) 2
		1.690mm (51W) 5	4.000K (118 lm/W) 4	Push 3	 Custom RAL
		1.970mm (59W) 6	5.000K (118 lm/W) 5	Casambi 5	
		2.530mm (97,5W) 7	2.700-5.500K (105 lm/W) 9	Emerg.+ On / Off K1	
			Emerg.+ Dali K2		
			Emerg.+ Push K3		
			Emerg.+ Casambi K5		

Code: 3



Emergency
4.000K 200lm
EN 60598-2-2




Accessories pages 176-179. Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.







Urban asymmetric E



*Spring clips included.



Urban asymmetric



Urban asymmetric E



Urban asymmetric



Control accessories:  page 327

 pages 326-333

 pages 334-335

Technical Information

Power	25W / 31W / 37W / 43W / 55W
Lumens	1.650 lm - 4.290 lm
Installation	Recessed and Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 52)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Asymmetric E 3	Opal asym. (30°/60°) 8	1.130mm (25W) 3	2.700K (66 lm/W) 2	On / Off 1	☐ White (9003) 1
Asymmetric 6		1.410mm (31W) 4	3.000K (72 lm/W) 3	Dali 2 	☐ Black (9005) 2
		1.690mm (37W) 5	4.000K (78 lm/W) 4	Push 3 	 Custom RAL
		1.970mm (43W) 6		Casambi 5	
		2.530mm (55W) 7		Tuya 7	

Code:  **8**

 Consult delivery terms and conditions.
*Create your code according to your preferences.

Common accessories



Joint 180°  40220 Joint 90°  40550

Urban asymmetric E accessories



End caps
☐ 40731
☒ 40732

Urban asymmetric accessories



End caps
☐ 40721
☒ 40722



Base 3x0,75 (2,5m)
Ø60x28mm
☐ 40881
☒ 40882



Base 5x0,5 (2,5m)
Ø60x28mm
☐ 40991
☒ 40992



Ceiling suspension
☒ 40780




Suspension Kit (2m)
☒ 40790


 RoHS  

Accessories pages 176-179.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 |  |  |  |  |  |  | 3,37m Max |  |  |  | 

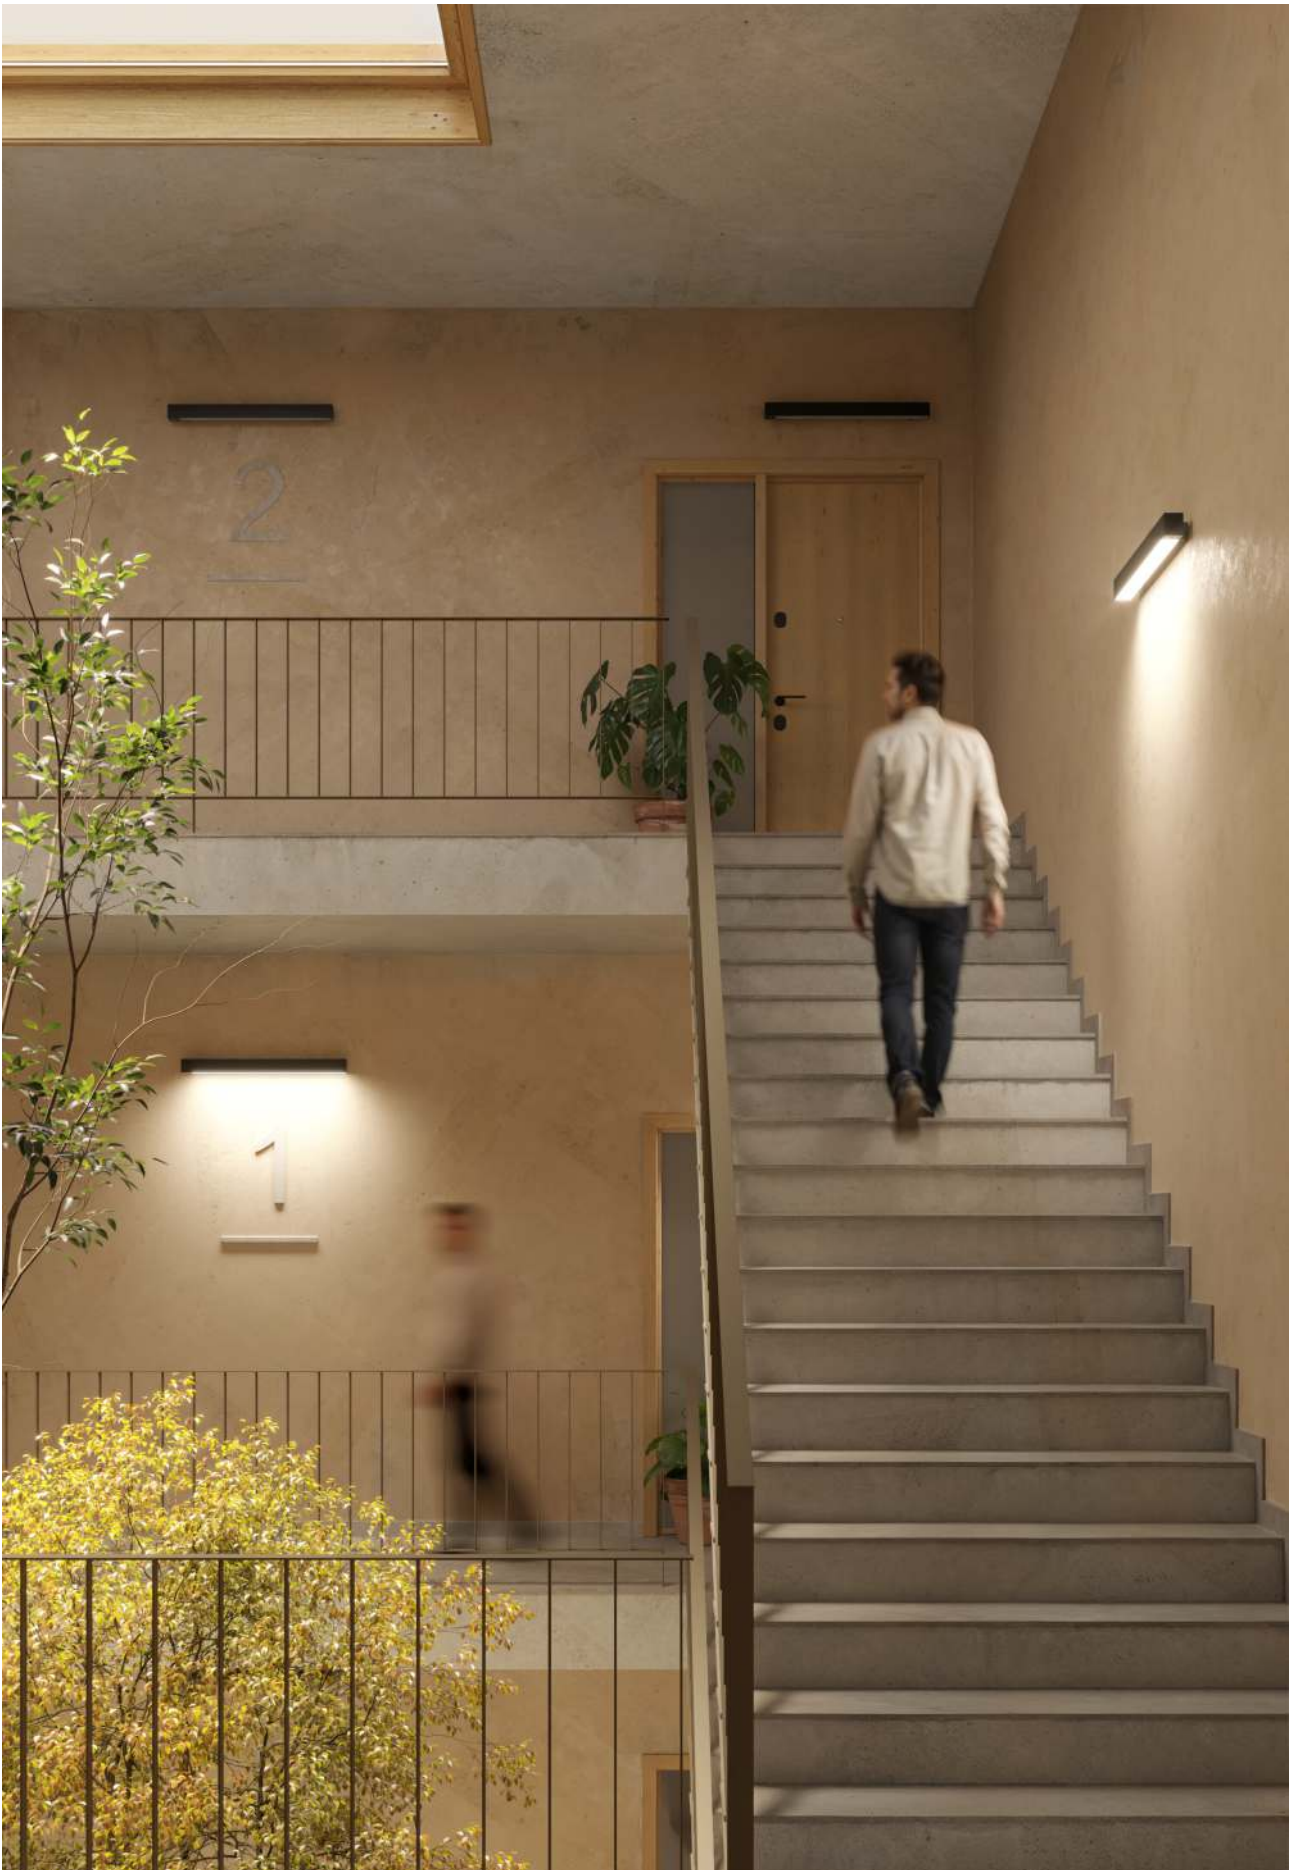

Urban wall sensor

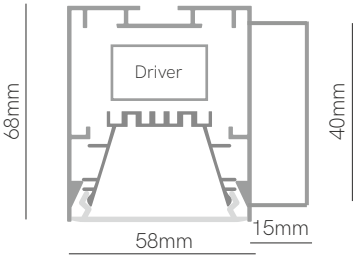

*Finished luminaire. Includes power supply, base wall and end caps.




Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Wall
Material	Aluminium 6063
PCB	Rigid


Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 6	Opal (112°) 1	570mm (21W) 1	2.700K (112 lm/W) 2	Motion sensor 0	White (9003) 1
		840mm (32W) 2	3.000K (128 lm/W) 3		Black (9005) 2
		1.130mm (43W) 3	4.000K (136 lm/W) 4		Gray (9006) 3
			5.000K (136 lm/W) 5		Custom RAL ①

Code: 6 1 0







① Consult delivery terms and conditions.
*Create your code according to your preferences.



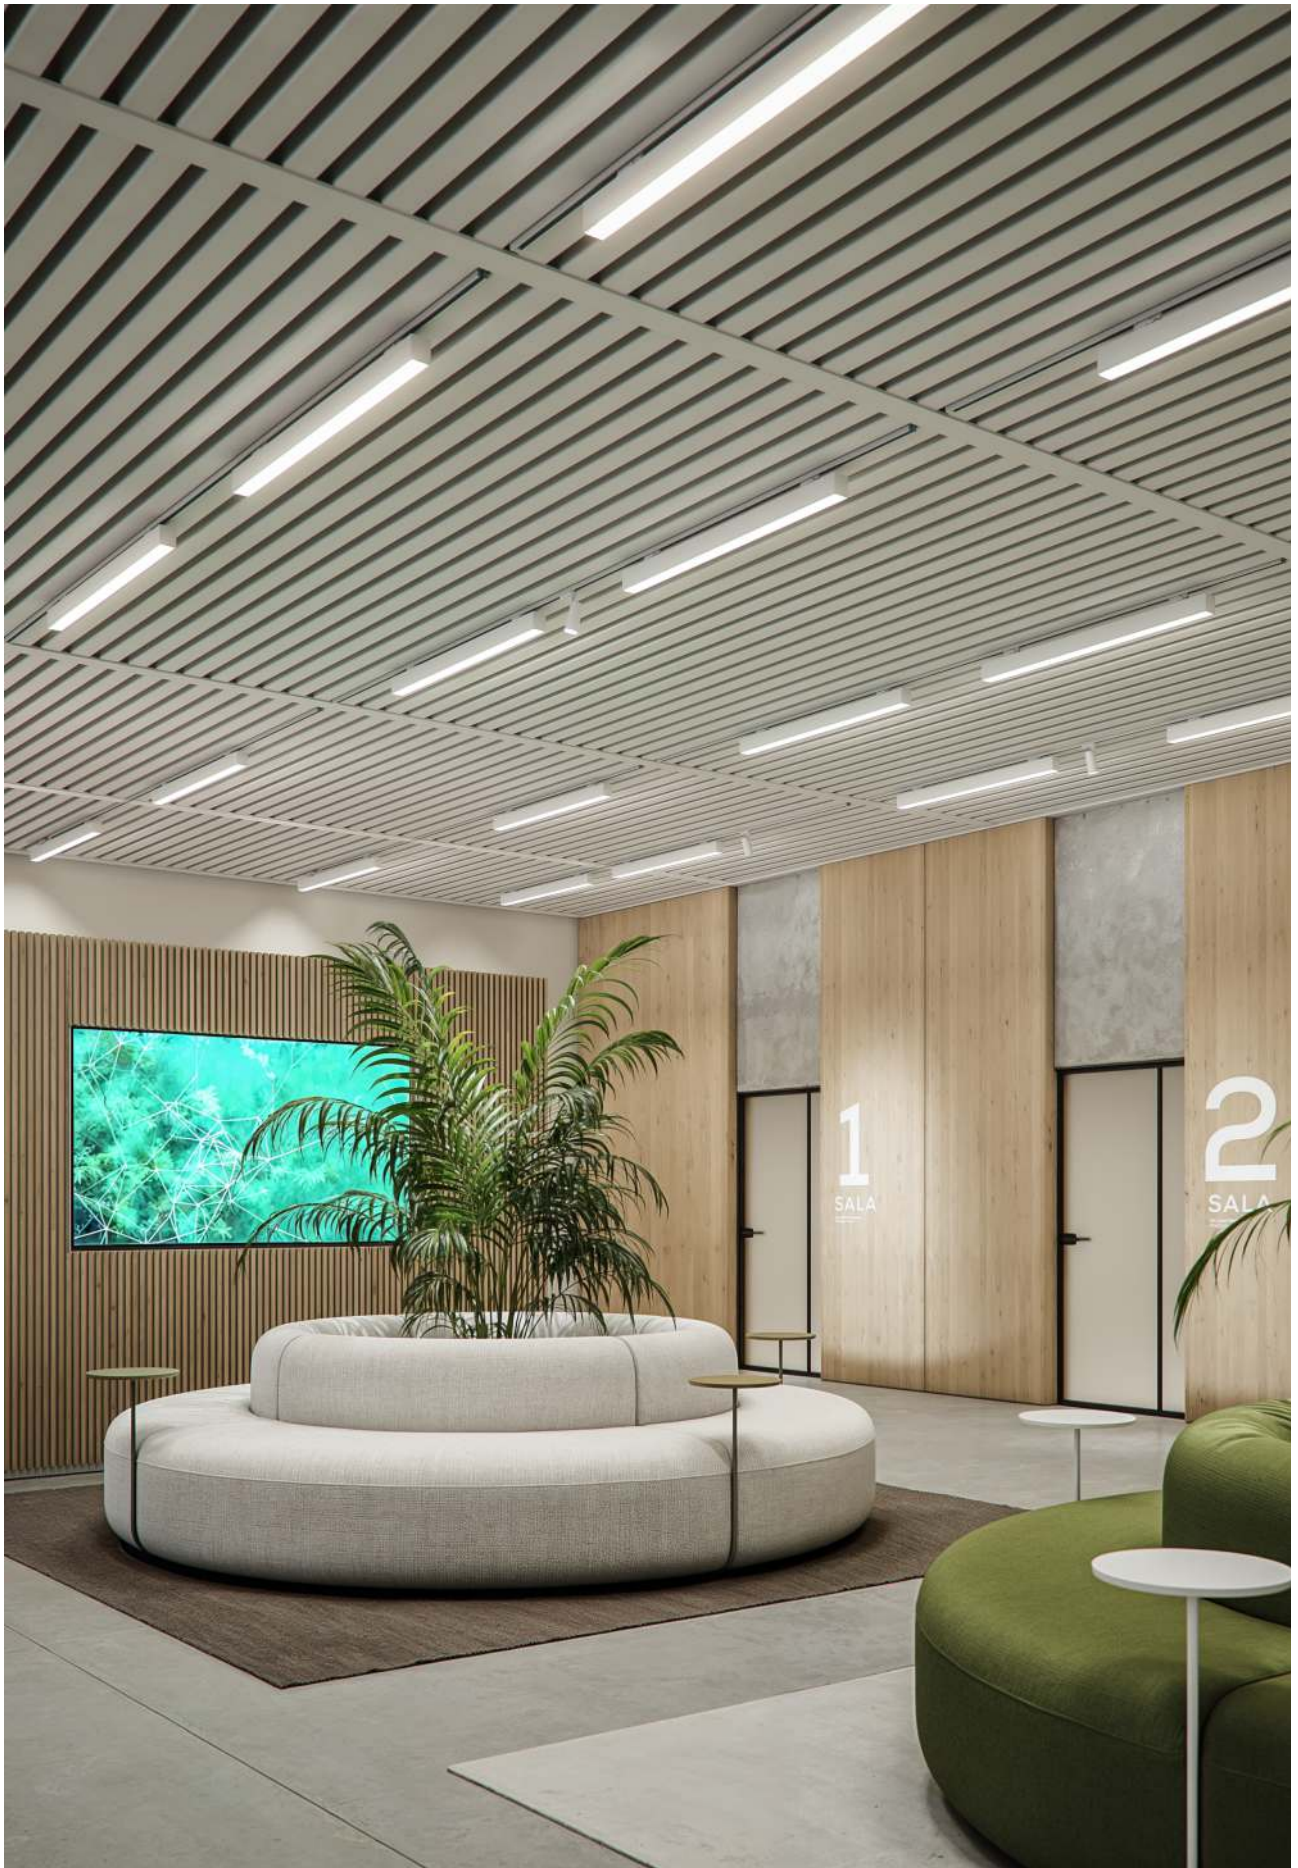

Urban track



*Finished luminaire.

Control accessories:  pages 326-333




Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 6	UGR (78°) 4	570mm (21W) 4	2.700K (112 lm/W) 2	On / Off 4	White (9003) 1
	Opal (112°) 5	840mm (32W) 6	3.000K (128 lm/W) 3	Casambi 6	Black (9005) 2
		1.130mm (43W) 8	4.000K (136 lm/W) 4		Custom RAL ①
			5.000K (136 lm/W) 5		

Code: 6 




① Consult delivery terms and conditions.





Urban market



Control accessories:  pages 334-335



Technical Information

Power	45W / 55,5W / 66W / 76,5W / 97,5W
Lumens	5.040 lm - 13.552 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid


Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 2	Asymmetric (15°/60°) 1	1.130mm (45W) 3	3.000K (112 lm/W) 3	On / Off 1	☐ White (9003) 1
	Double asym.(60°/60°) 2	1.410mm (55,5W) 4	4.000K (118 lm/W) 4	Dali 2	☒ Black (9005) 2
	Optical (30°) 3	1.690mm (66W) 5	MEAT R - 3.200K (86 lm/W) R		 Custom RAL
	Optical (60°) 6	1.970mm (76,5W) 6	HAM - 3.200K (85 lm/W) X		
	Optical (90°) 9	2.530mm (97,5W) 7	MEAT M - 3.500K (84 lm/W) M		
			FISH - 6.500K (139 lm/W) F		
			FRUIT - 4.200K (123 lm/W) V		
			BREAD - 2.700K (131 lm/W) P		

Code: **2** 

 Consult delivery terms and conditions.
*Create your code according to your preferences.

Accessories

						
End caps ☐ 40721 ☒ 40722	Joint 180° ☒ 40220	Joint 90° ☒ 40550	Base 3x0,75 (2,5m) Ø60x28mm ☐ 40881 ☒ 40882	Base 5x0,5 (2,5m) Ø60x28mm ☐ 40991 ☒ 40992	Ceiling suspension ☒ 40780	Suspension Kit ☒ 40795 (5m)





Accessories pages 176-179.





NEW

Urban 3PH





Technical Information

Installation		Three Phase Track		Material		Aluminium 6063	
Code		Size (Power)		Driver		Colour	
Code		51		On / Off		1	
		1.000mm				1	
		2.000mm				2	
		3.000mm				1	
						Custom RAL	

Code: 5 1 1 1 1

NEW


Urban closed



Technical Information

Installation	Surface	Material	Aluminium 6063
Code	Size (Power)	Driver	Colour
Code52	1.000mm10	On / Off1	☐ White (9003)1
			☒ Black (9005)2
			 Custom RAL



Code: 5 2 1 0 1



Consult delivery terms and conditions.




Time E



*Spring clips included.

Time



Control accessories:  pages 326-333  pages 334-335



Technical Information

Power	31W / 46W / 69W
Lumens	3.472 lm - 9.384 lm
Installation	Recessed and Surface / Pendant

Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Time E 9	UGR (81°) 3	1.130mm (31W) 3	2.700K (112 lm/W) 2	On / Off 1	☐ White (9003) 1
Time 8	Opal (112°) 5	1.690mm (46W) 5	3.000K (128 lm/W) 3	Dali 2	☒ Black (9005) 2
		2.530mm (69W) 7	4.000K (136 lm/W) 4	Push 3	☐ Gray (9006) 3
			5.000K (136 lm/W) 5	Casambi 5	 Custom RAL


Code: 

 Consult delivery terms and conditions.
*Create your code according to your preferences.



Common accessories



Time E accessories





Time accessories

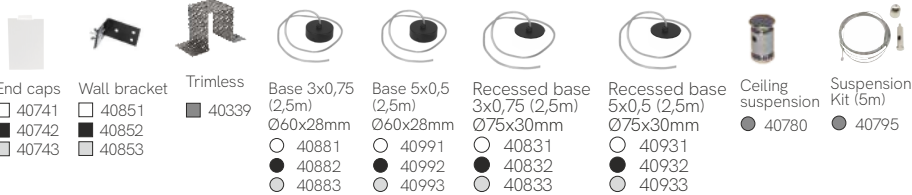

Accessories pages 176-179.



Nexus



*Finished luminaire. Includes suspension kit, power cable and end caps.


Control accessories:  page 327  pages 326-333

Technical Information

Power	46W / 70W
Lumens	4.830 lm - 7.350 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	UGR (81°) 4	1.130mm (46W) 3	2.700-5.500K (105 lm/W) 9	Casambi 5	☐ White (9003) 1
		1.690mm (70W) 5		Tuya 7	☒ Black (9005) 2
				RF Control 9	☐ Gray (9006) 3
					 Custom RAL

Code: 4 4 9



 Consult delivery terms and conditions.

*Create your code according to your preferences. RF included on Driver RF Control.

5 YEARS WARRANTY

50.000 HOURS

IP 40

UGR <19

230 VAC

PF >0,9

 CRI >95





3,37m Max










 RF

NEW

Color time

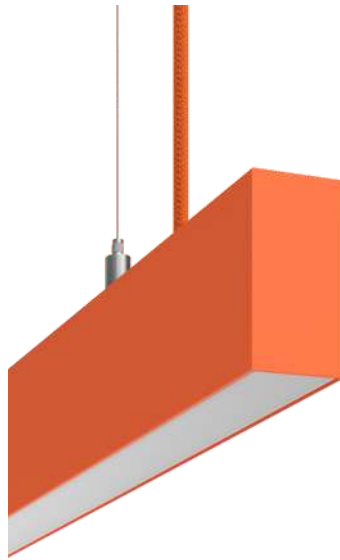

*Finished luminaire. Includes suspension kit and textile power cable.


Control accessories:  page 327  pages 326-333

Technical Information

Power	43W / 54W / 64W / 75W
Lumens	4.300 lm - 8.250 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 8	UGR (81°) 0	1.130mm (43W) 3	2.700K (100 lm/W) 2	On / Off 1	☐ White (9003) 1
		1.410mm (54W) 4	3.000K (105 lm/W) 3	Triac 4	☒ Black (9005) 2
		1.690mm (64W) 5	4.000K (110 lm/W) 4	Casambi 5	☒ Gray (7037) 3
		1.970mm (75W) 6	2.700-5.500K (100 lm/W) 9	Tuya 7	☒ Green (6018) 4
					☒ Orange (2009) 5
					☒ Red (3020) 6
					☒ Violet (4008) 7
					☒ Pastel blue (5024) 8
					☒ Light blue (5012) 9
					☒ Custom RAL


Code: **8 0**




 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



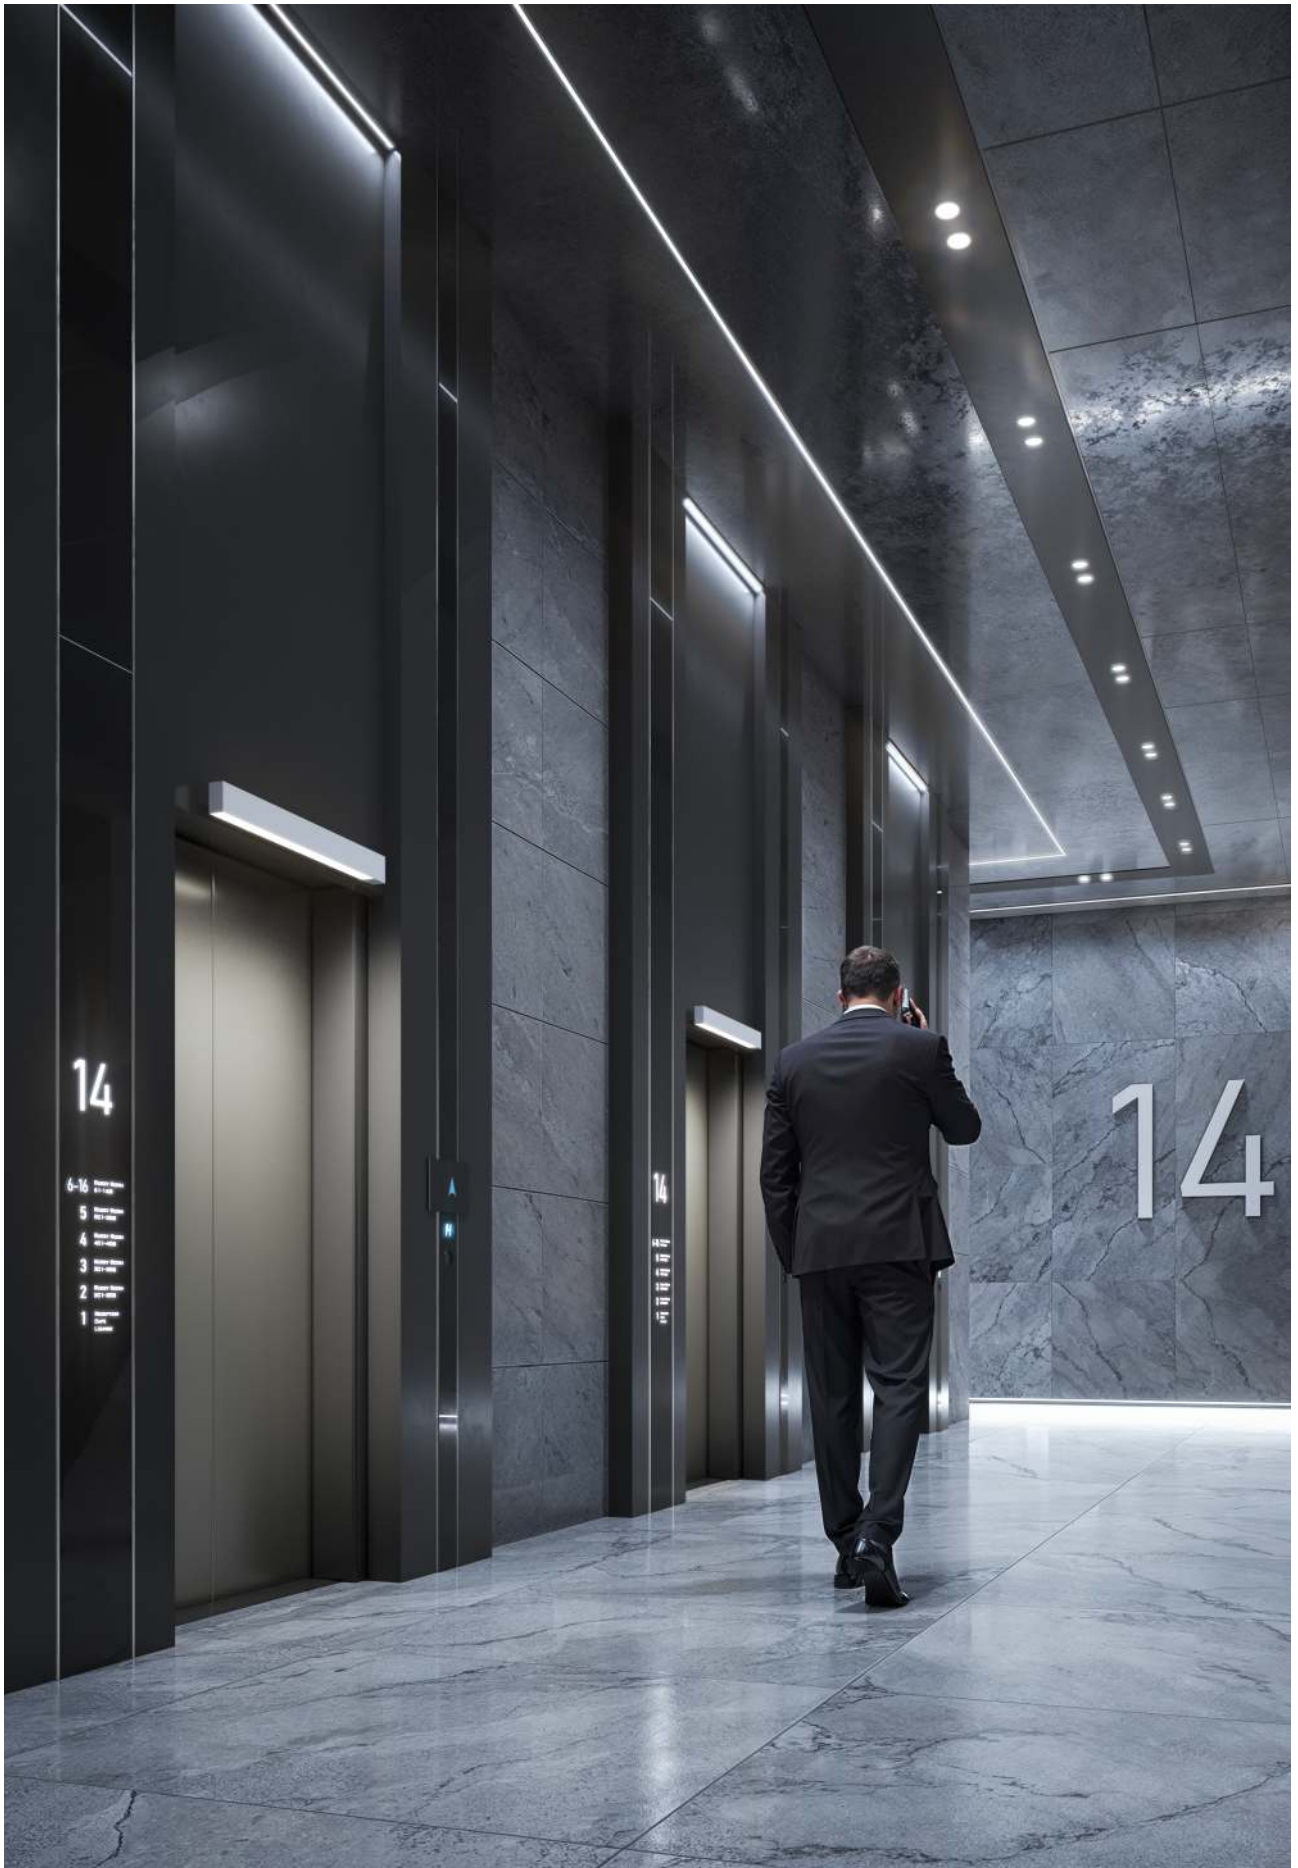

Time wall sensor



*Finished luminaire. Includes power supply, base wall and end caps.




Technical Information

Power	15W / 23W / 31W
Lumens	1.680 lm - 4.216 lm
Installation	Wall
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 8	Opal (112°) 1	570mm (15W) 1	2.700K (112 lm/W) 2	Motion sensor 0	☐ White (9003) 1
		840mm (23W) 2	3.000K (128 lm/W) 3		☒ Black (9005) 2
		1.130mm (31W) 3	4.000K (136 lm/W) 4		☐ Gray (9006) 3
			5.000K (136 lm/W) 5		☒ Custom RAL

Code: 8 1 0




ⓘ Consult delivery terms and conditions.
*Create your code according to your preferences.







Time track



Equipment



Control accessories:  pages 326-333



Technical Information


Power	15W / 23W / 31W
Lumens	1.680 lm - 4.216 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 8	UGR (81°) 3	570mm (15W) 4	2.700K (112 lm/W) 2	On / Off 4	☐ White (9003) 1
	Opal (112°) 5	840mm (23W) 6	3.000K (128 lm/W) 3	Casambi 6	☒ Black (9005) 2
		1.130mm (31W) 8	4.000K (136 lm/W) 4		①  Custom RAL
			5.000K (136 lm/W) 5		

Code: 8 ☐ ☐ ☐ ☐ ☐





① Consult delivery terms and conditions.
*Create your code according to your preferences.





Forest



*Finished luminaire. Includes suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	31W / 38W / 46W / 53W
Lumens	3.255 lm - 7.208 lm
Installation	Pendant
Material	Aluminium 6063 and wood
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	UGR (81°) 3 Opal (112°) 5	1.155mm (31W) 3 1.435mm (38W) 4 1.715mm (46W) 5 1.995mm (53W) 6	2.700K (112 lm/W) 2 3.000K (128 lm/W) 3 4.000K (136 lm/W) 4 5.000K (136 lm/W) 5 2.700-5.500K (105 lm/W) 9	On / Off 1 Dali 2 Push 3 Casambi 5 Tuya 7	ⓘ Wood 8

Code: 4 8




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Dual




Opal/UGR


Dual inserted track



Spot not included



Track/UGR



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  pages 326-333  pages 334-335




Technical Information

Power	18-24W / 28-35W / 46-52W
Lumens	Up 2.016 lm - 6.256 lm / Down 2.688 lm - 7.072 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Opal/UGR (81°) 6	1.130mm (18-24W) 3	2.700K (112 lm/W) 2	On / Off 1	☐ White (9003) 1
	Track/UGR (81°) 9	1.690mm (28-35W) 5	3.000K (128 lm/W) 3	Dali 2	☒ Black (9005) 2
		2.530mm (46-52W) 7	4.000K (136 lm/W) 4	Push 3	☒ Custom RAL
			5.000K (136 lm/W) 5	Casambi 5	

Code: 5 




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences.







Kubo E

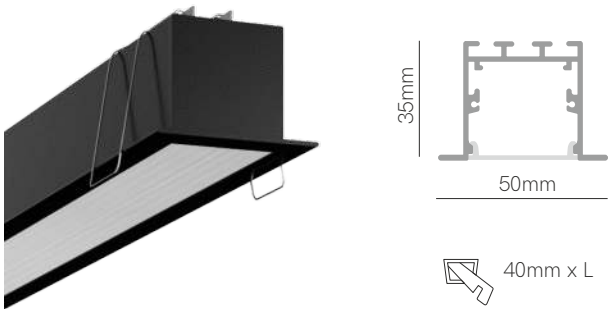


*Finished luminaire. Includes driver, spring clips, power cable and end caps.



Kubo

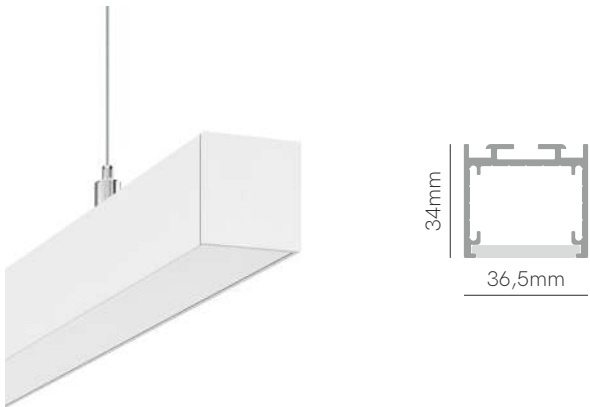

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.



Control accessories:  page 327

 pages 326-333

 pages 334-335




Technical Information

Power	31W / 38W / 46W / 54W
Lumens	3.100 lm - 6.264 lm
Installation	Recessed and Surface / Pendant

Material	Aluminium 6063
PCB	Rigid / RGB-W Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Kubo E 5	Opal (100°) 5	1.130mm (31W) 3	2.700K (100 lm/W) 2	On / Off 1	☐ White (9003) 1
Kubo 7		1.410mm (38W) 4	3.000K (105 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.690mm (46W) 5	4.000K (111 lm/W) 4	Push 3	 Custom RAL
		1.970mm (54W) 6	5.000K (116 lm/W) 5	Casambi 5	
			RGB-W (100 lm/W) 8	Tuya 7	
			2.700-5.500K (105 lm/W) 9		

Code:



 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY

50.000 HOURS

IP 20

230 VAC

PF >0,9

 CRI ≥95


























Kubo 3,37m
Kubo E 2m

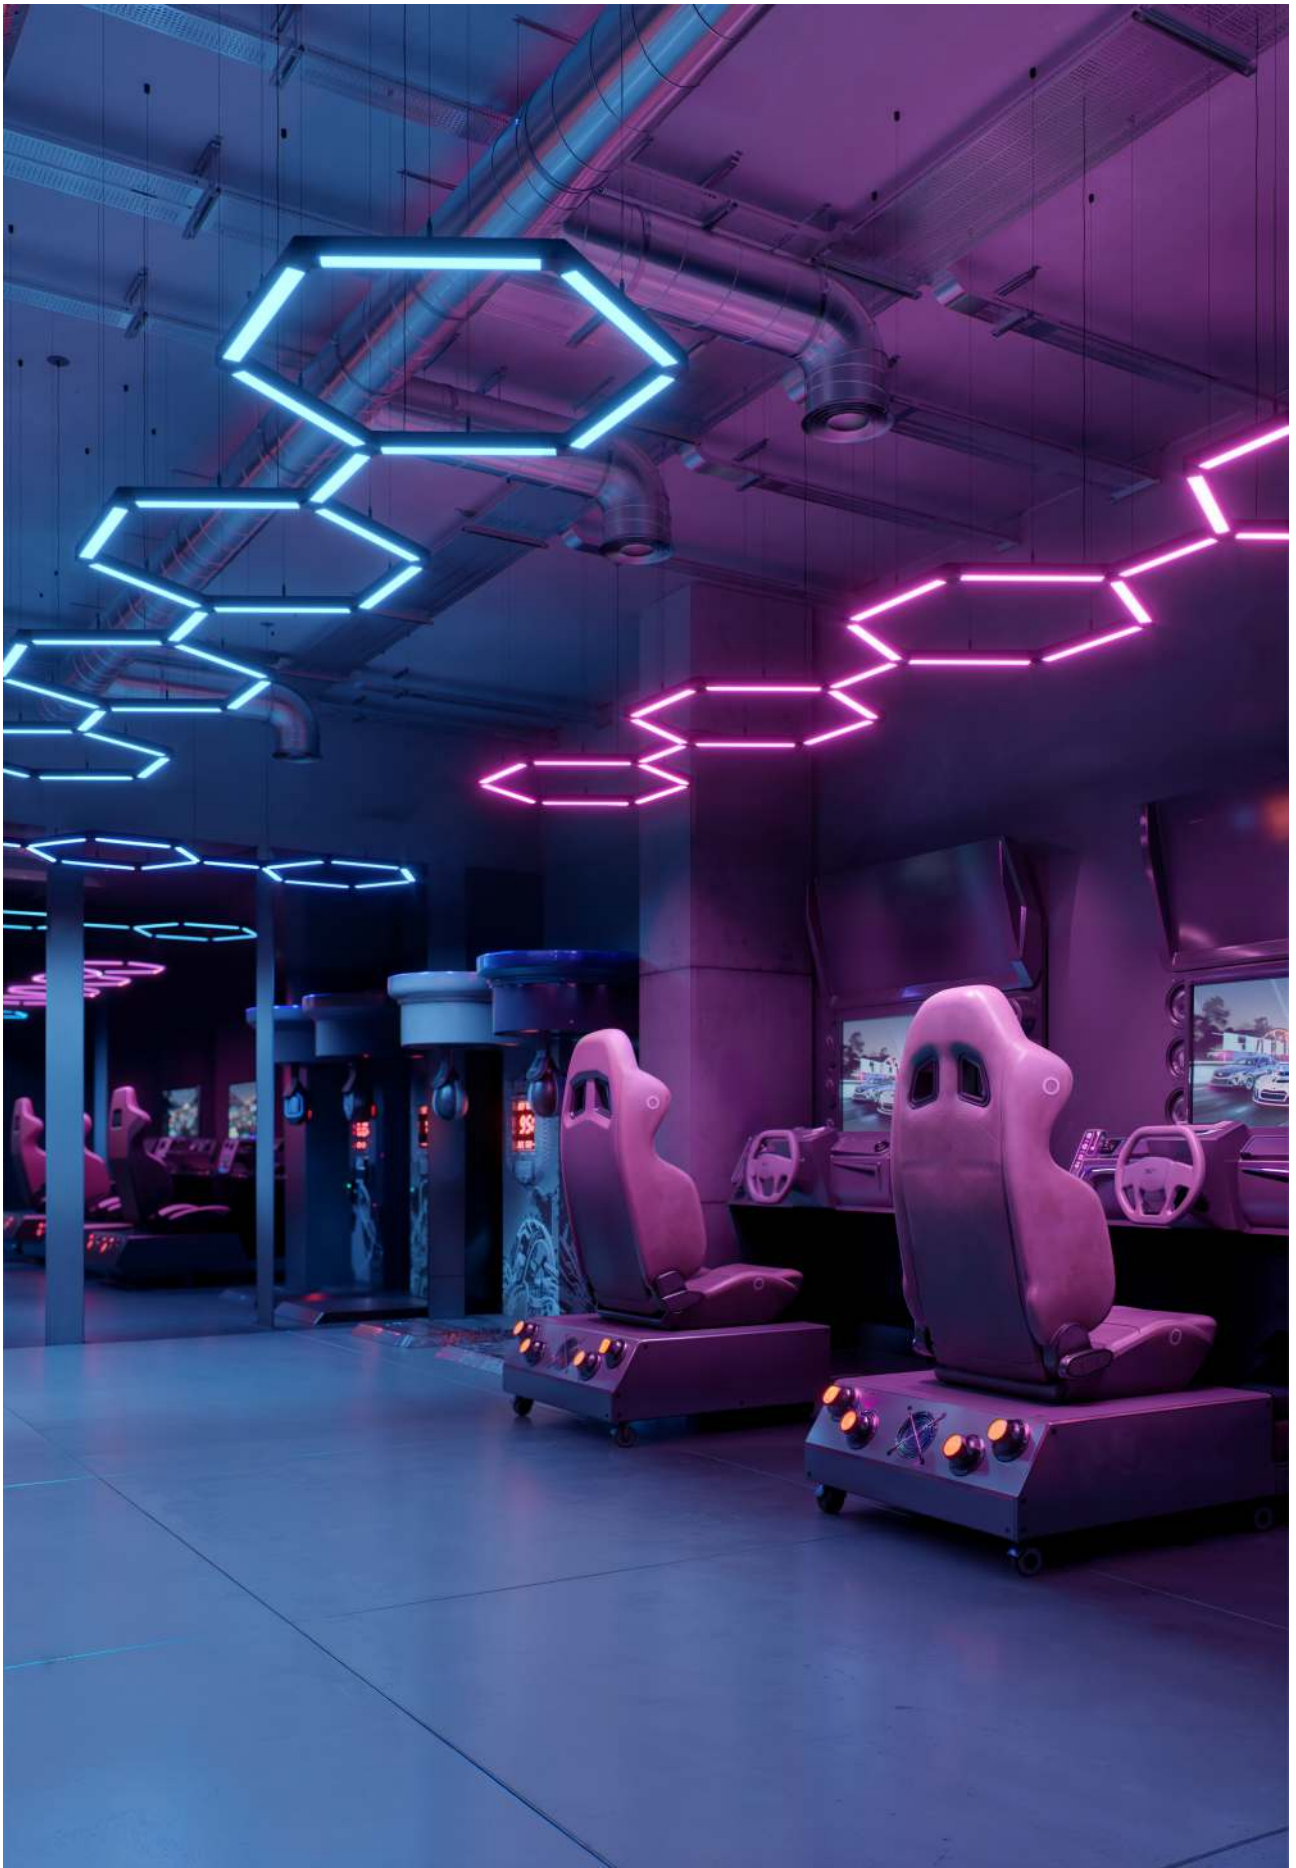

NEW

Puzzle

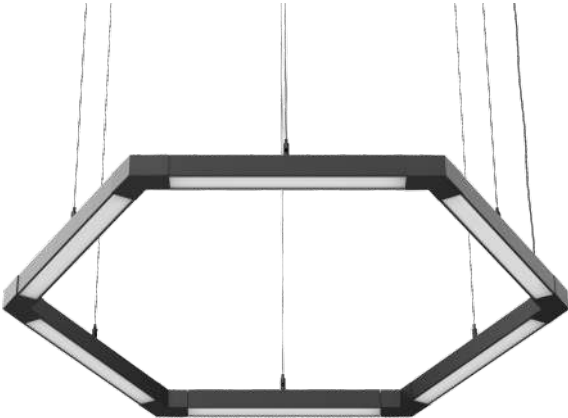

Customizable modular system. Components are supplied separately to allow for bespoke configurations. Power supply required (pages 340-341).

Sistema modular para configuraciones a medida. Componentes por separado, requiere fuente de alimentación (páginas 340-341).



Technical Information

Power	8W / 10W / 12W	Material	Aluminium 6063
Lumens	528 lm - 936 lm	PCB	Flex (Fine 56)
Installation	Pendant		

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Opal (100°) 1	330mm (8W) 1	2.700K (66 lm/W) 2	24 VDC (without equipment) 0	○ White (9003) 2
		430mm (10W) 2	3.000K (72 lm/W) 3		● Black (9005) 2
		530mm (12W) 3	4.000K (78 lm/W) 4		① Custom RAL
			RGB (50 lm/W) 7		
			2.700-5.500K (70 lm/W) 9		

Code: 4 1 0

Accessories

End caps

☐ 417701

☒ 417702

Joint Y

☐ 419901

☒ 419902

Joint 90°

☐ 412201

☒ 412202

Joint 120°

☐ 415501

☒ 415502


Suspension Kit Metallic (2m)

☒ 34720

☐ 34721

☒ 34722

Connection
412622 2 Wires M-M-F
412922 2 Wires F-F-M
413633 3 Wires M-M-F
413933 3 Wires F-F-M
414644 4 Wires M-M-F
414944 4 Wires F-F-M



① Consult delivery terms and conditions.

*Create your code according to your preferences.

5 YEARS WARRANTY

50.000 HOURS

IP 40


24 VDC

CRI ≥90

2m Max



Mirrow

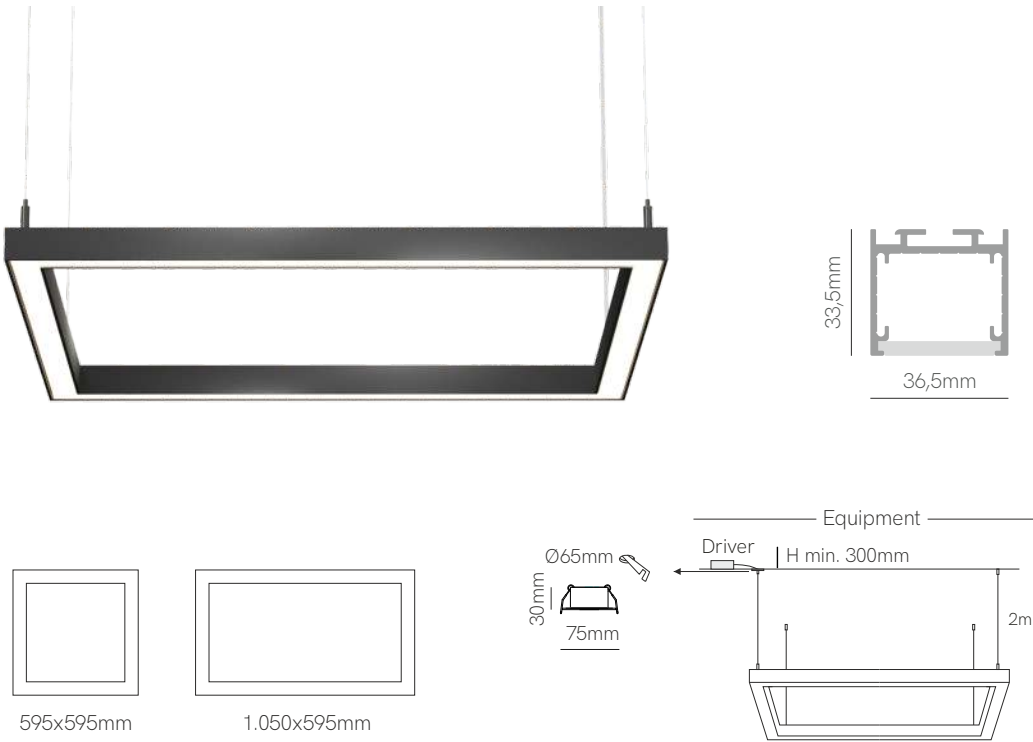

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information

Power	53W / 80W
Lumens	5.300 lm - 8.880 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid / RGB-W Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 7	Opal (100°) 8	595x595mm (53W) 2	2.700K (100 lm/W) 2	On / Off 1	White (9003) 1
		1.050x595mm (80W) 9	3.000K (105 lm/W) 3	Dali 2	Black (9005) 2
			4.000K (111 lm/W) 4	Push 3	Custom RAL
			RGB-W (100 lm/W) 8	Casambi 5	
			2.700-5.500K (105 lm/W) 9	Tuya 7	

Code: 7 8




Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Tax

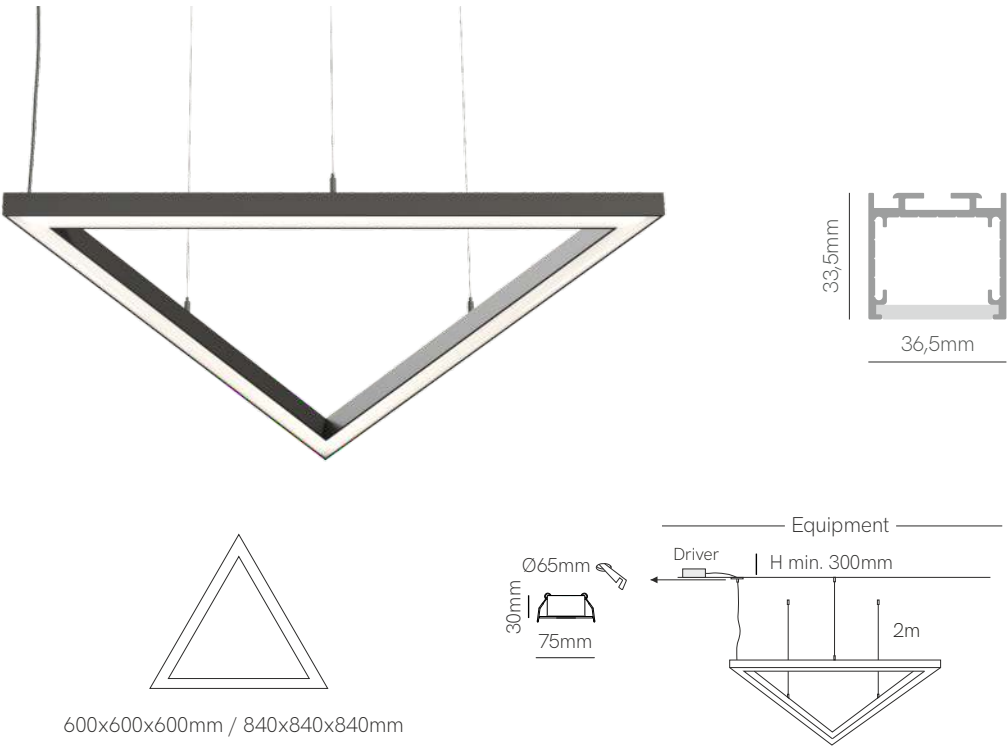

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	39W / 55W
Lumens	3.900 lm - 6.105 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid / RGB-W Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 7	Opal (100°) 2	600mm (39W) 4	2.700K (100 lm/W) 2	On / Off 1	△ White (9003) 1
		840mm (55W) 8	3.000K (105 lm/W) 3	Dali 2	▲ Black (9005) 2
			4.000K (111 lm/W) 4	Push 3 ①	🌈 Custom RAL
			RGB-W (100 lm/W) 8	Casambi 5	
			2.700-5.500K (105 lm/W) 9	Tuya 7	

Code: 7 2



① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.








NEW

Luxor



1.000/1.400/1.700/2.000mm



*Finished luminaire.

Control accessories:  page 327



Technical Information

Power	24W / 28W / 34W / 40W
Lumens	3.120 lm - 5.600 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Flex (Fine 42 / Fine 54 / Fine 68)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 9	Opal (90°) 4	1.200mm (24W) 3	2.700K (130 lm/W) 2	24 VDC (without equipment) 0	● Black (9005) 2
		1.400mm (28W) 4	3.000K (135 lm/W) 3		
		1.700mm (34W) 5	4.000K (140 lm/W) 4	External equipment RF + Tuya 9	
		2.000mm (40W) 6	RGB (50 lm/W) 7		
			1.800-4.000K (90 lm/W) 9		

Code: 9 4 2



ⓘ Consult delivery terms and conditions.


*Create your code according to your preferences. RGB and CCT 1.800-4.000K only works with driver 9 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 24 VDC | 230 VAC | PF >0,9 | CRI ≥95 |  |  | 2m Max  |  RF + 



NEW

Filter line

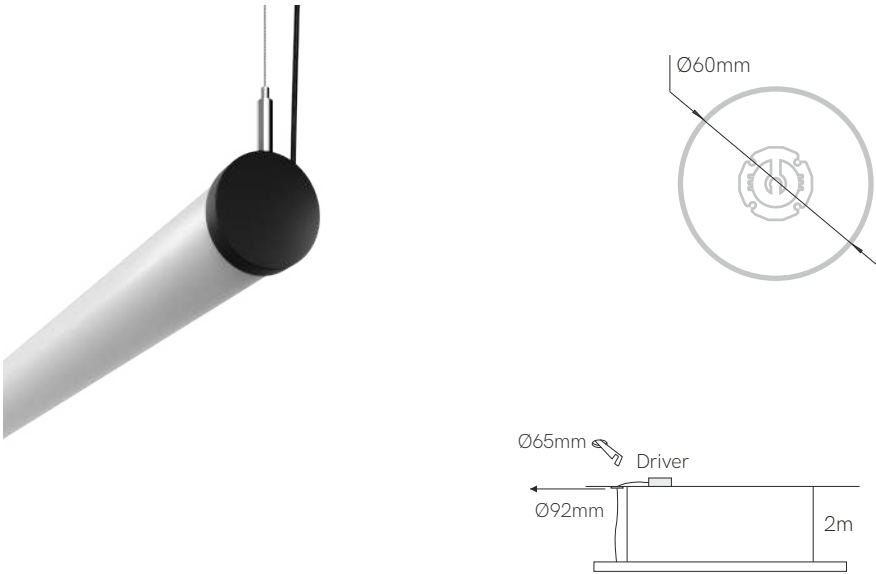

*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information

Power	Monocolor: 48W / 64W / 80W - RGB: 69W / 92W / 120W
Lumens	4.800 lm - 13.320 lm
Installation	Pendant
Material	Aluminium and polycarbonate
Material	Flex (Fine 48 / Fine 54)

Code	Diffuser (Angle)	Size (Power Monocolor - RGB)	CCT (lm/W)	Driver	Colour
Code 3	Opal (360°) 2	1.200mm (48W) - (69W) 5	2.700K (100 lm/W) 2	On / Off 1	○ White (9003) 1
		1.600mm (64W) - (92W) 7	3.000K (105 lm/W) 3	Casambi 5	● Black (9005) 2
		2.000mm (80W) - (120W) 9	4.000K (111 lm/W) 4	Tuya 7	
			RGB (58 lm/W) 7	Dali / Push 8	


Code: 3 2



ⓘ Consult delivery terms and conditions.


*Create your code according to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.



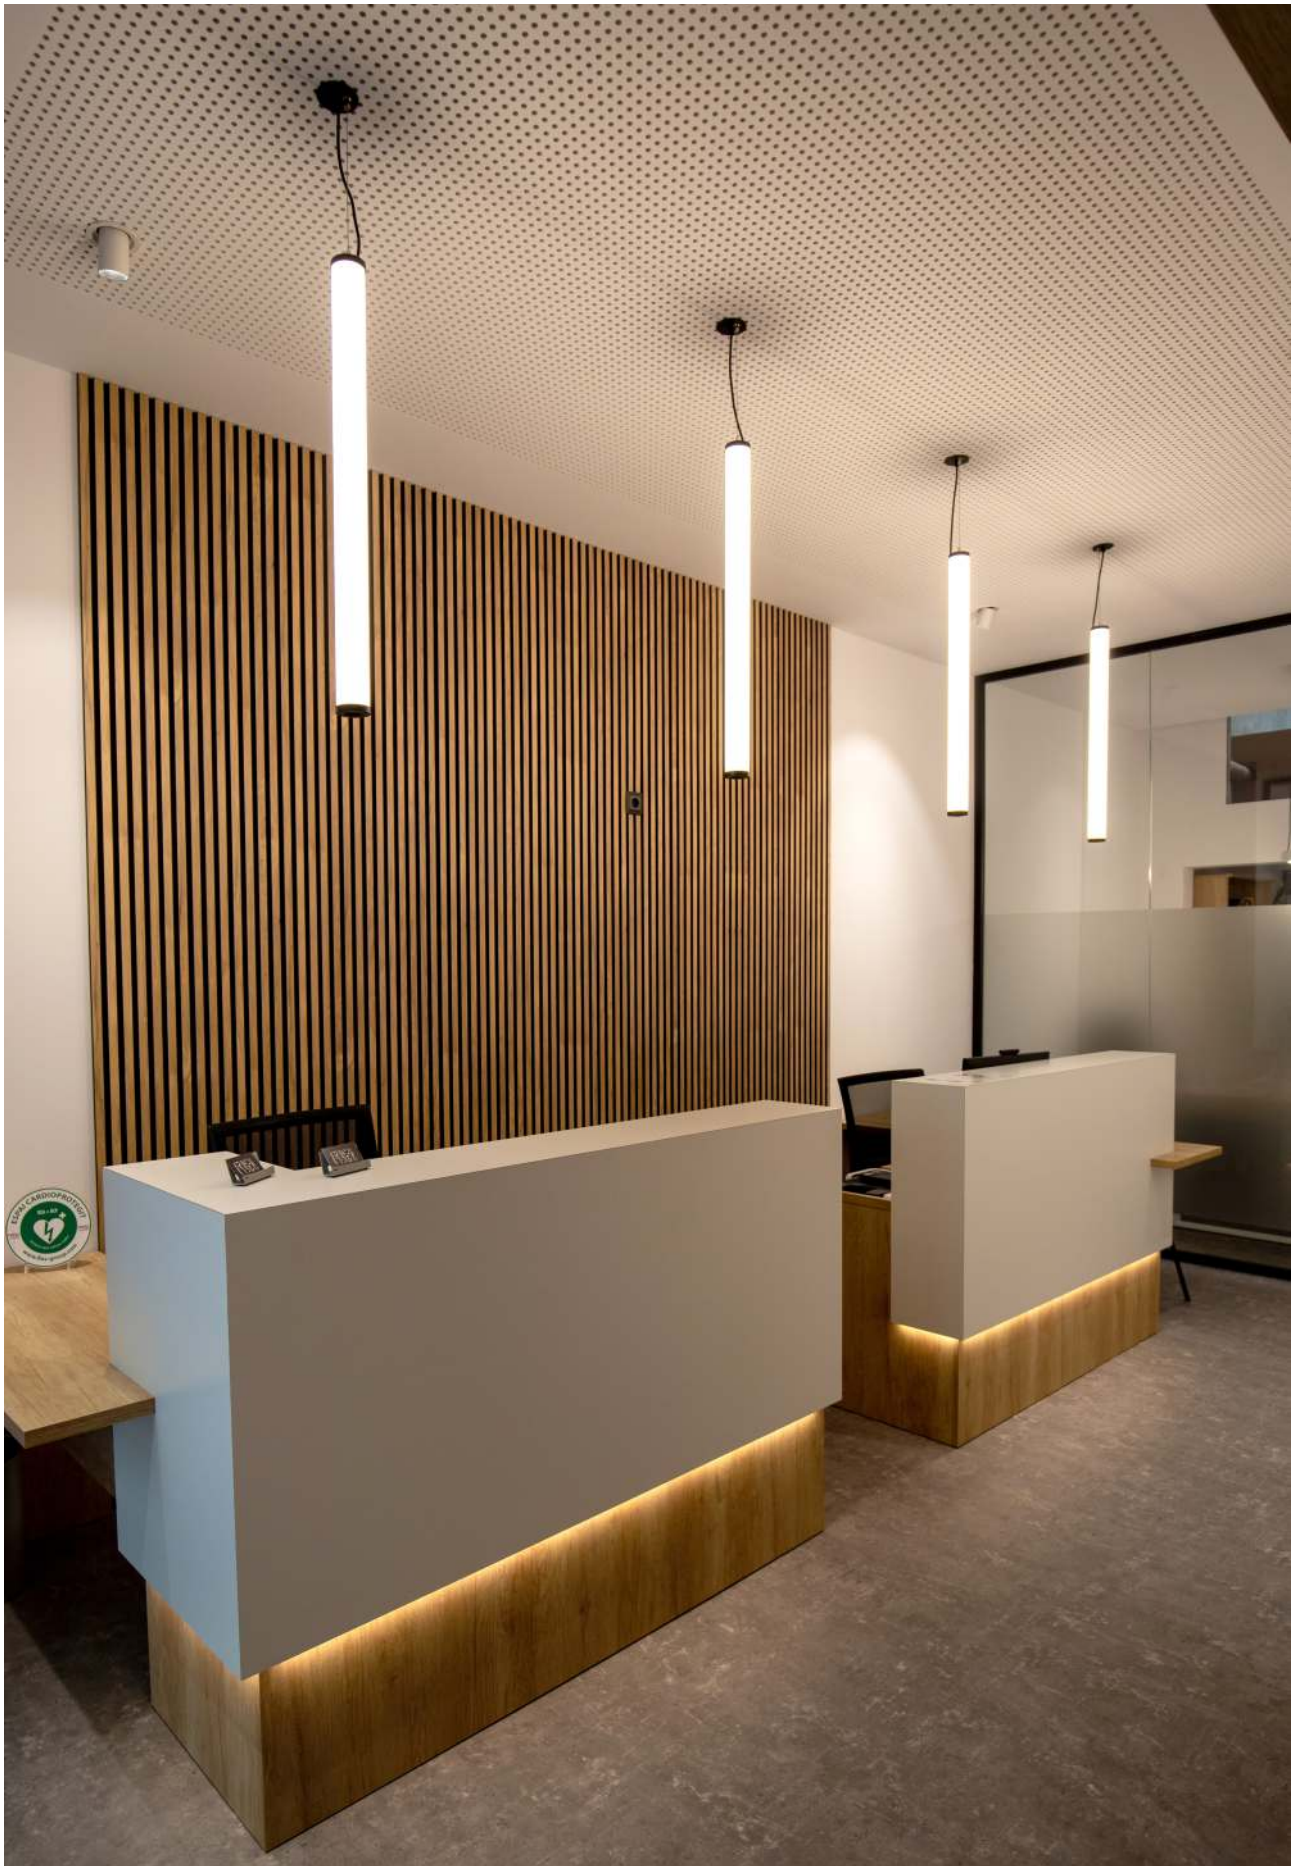

Institut Ferrés Anat, Barcelona (Spain). Lighting project: Vié Il·luminació. Architecture: Pablo Amorós.



Filter



Equipment

Code **30** recessed driver

Code **37** surface driver



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327

 pages 326-333

 pages 334-335



Technical Information

Power	Monocolor: 32W / 48W / 64W / 80W - RGB: 46W / 69W / 92W / 120W
Lumens	3.200 lm - 13.320 lm
Installation	Pendant
Material	Aluminium and polycarbonate
Material	Flex (Fine 48 / Fine 54)

Code / Diffuser (Angle)	Size (Power Monocolor - RGB)	CCT (lm/W)	Driver	Colour
Recessed Opal (360°) 30	800mm (32W) - (46W) 3	2.700K (100 lm/W) 2	On / Off 1	○ White (9003) 1
Surface Opal (360°) 37	1.200mm (48W) - (69) 5	3.000K (105 lm/W) 3	Dali 2	● Black (9005) 2
	1.600mm (64W) - (92) 7	4.000K (111 lm/W) 4	Push 3	
	2.000mm (80W) - (120W) 9	RGB (58 lm/W) 7	Casambi 5	
			Tuya 7	

Code: 




 Consult delivery terms and conditions.

*Create your code according to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.








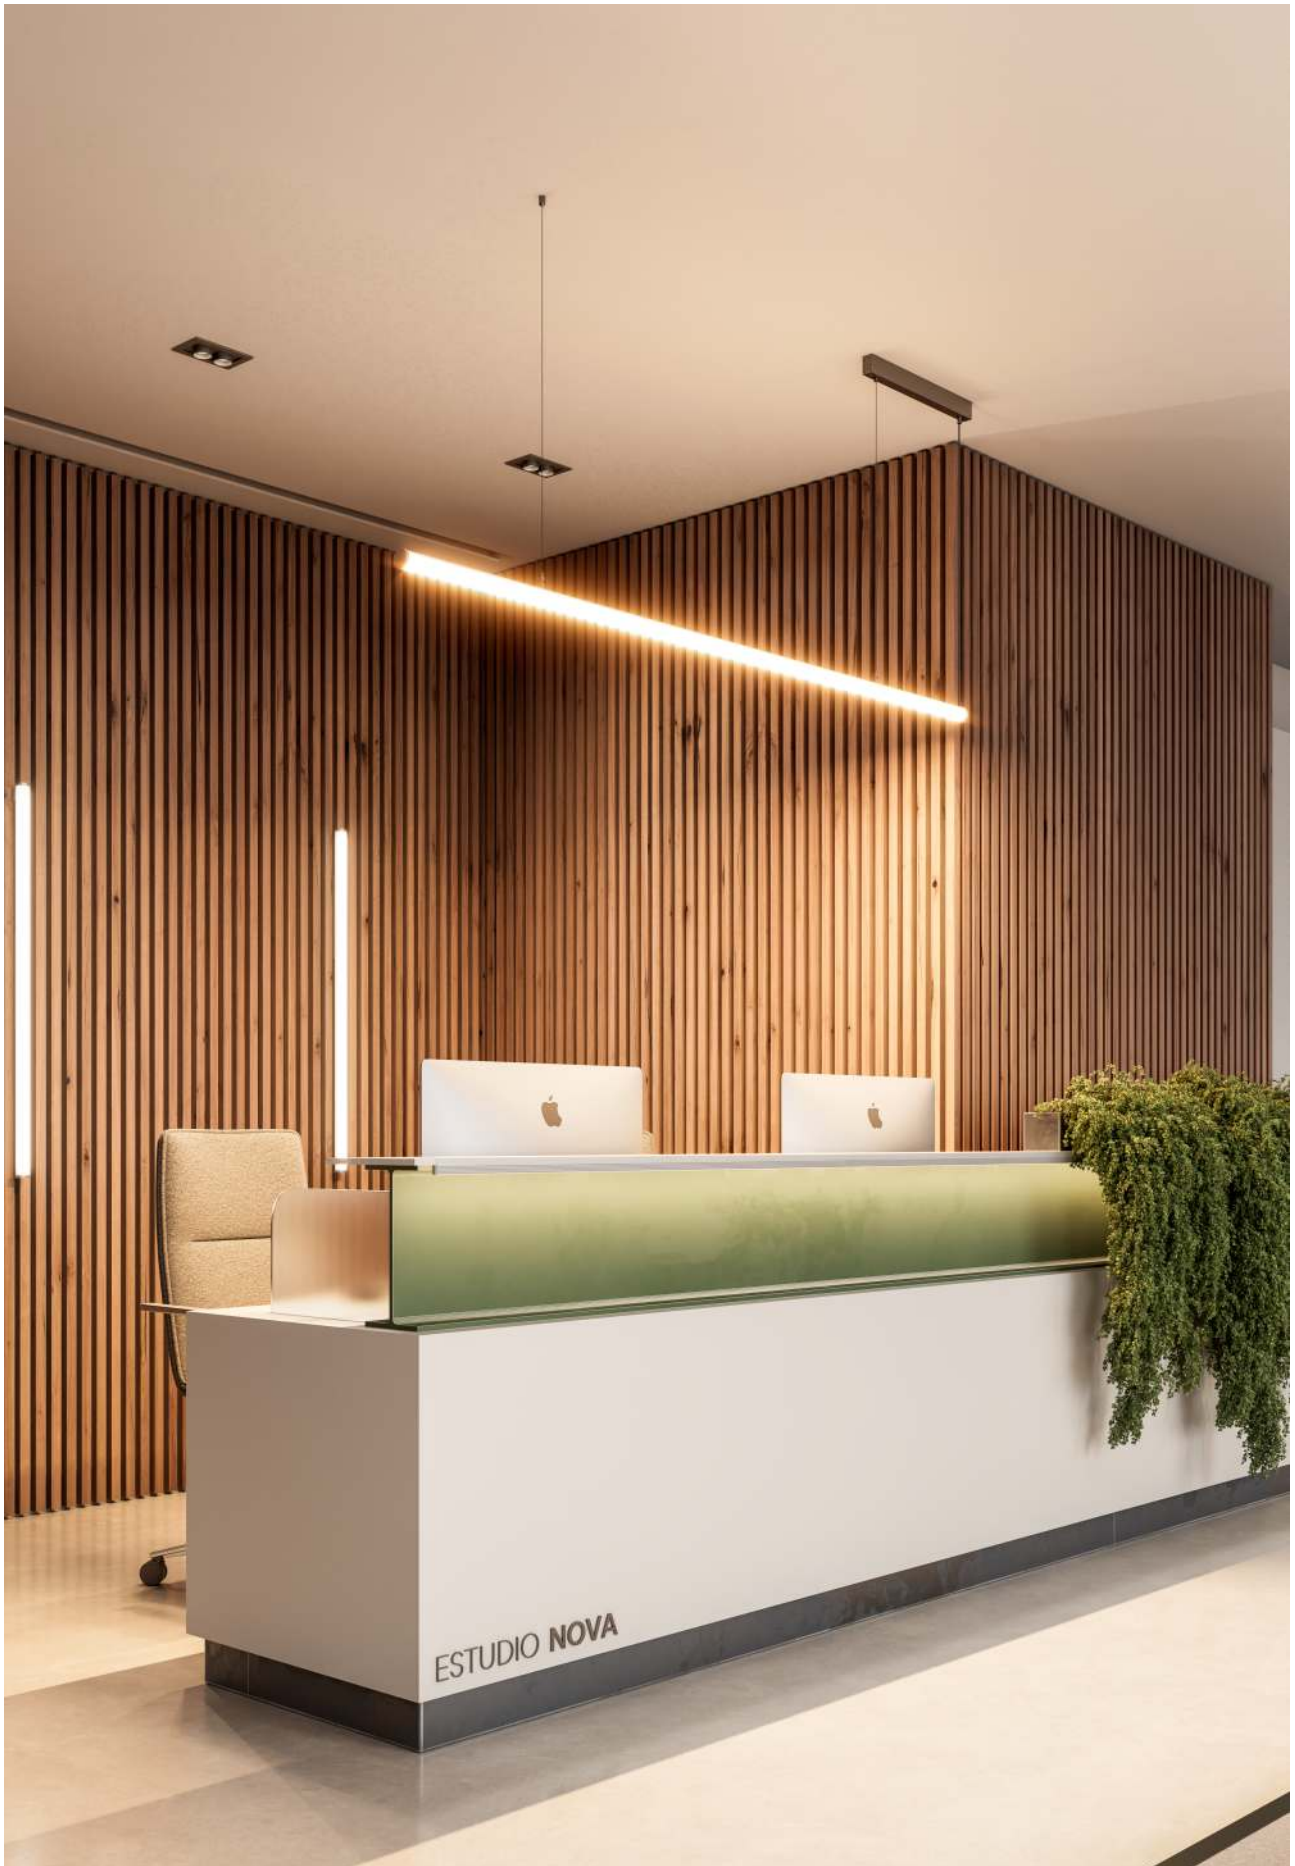

NEW

Tubi mini



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information

Power	21W / 27W / 32W / 37W
Lumens	2.730 lm - 5.180 lm
Installation	Pendant
Material	Aluminium and polycarbonate
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 2	Opal (270°) 0	1.130mm (21W) 3	2.700K (130 lm/W) 2	On / Off 1	○ White (9003) 1
		1.410mm (27W) 4	3.000K (135 lm/W) 3	Casambi 5	● Black (9005) 2
		1.690mm (32W) 5	4.000K (140 lm/W) 4	Tuya 7 ①	🌈 Custom RAL
		1.970mm (37W) 6	RGB (58 lm/W) 7	Dali / Push 8	
			1.800-4.000K (90 lm/W) 9		

Code: 2 0



① Consult delivery terms and conditions.


*Create your code according to your preferences. RGB-W and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.






Institut Ferrés Anat, Barcelona (Spain). Lighting project: Vié Il·luminació. Architecture: Pablo Amorós.

Tubi



Equipment



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	35W / 44W / 53W / 62W
Lumens	3.500 lm - 8.432 lm
Installation	Pendant
Material	Aluminium and polycarbonate
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 7	Opal (270°) 1	1.130mm (35W) 3	2.700K (100 lm/W) 2	On / Off 1	○ White (9003) 1
		1.410mm (44W) 4	3.000K (128 lm/W) 3	Dali 2	● Black (9005) 2
		1.690mm (53W) 5	4.000K (136 lm/W) 4	Push 3	①  Custom RAL
		1.970mm (62W) 6	5.000K (136 lm/W) 5	Casambi 5	
			RGB-W (100 lm/W) 8	Tuya 7	
			2.700-5.500K (105 lm/W) 9		

Code: 7 1



① Consult delivery terms and conditions.


*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





NEW

Tubi wall mini

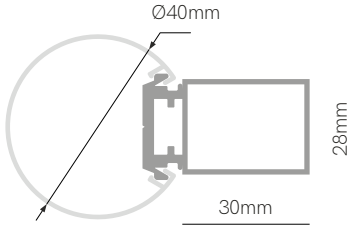

*Finished luminaire. Includes base wall and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	21W / 27W / 32W / 37W
Lumens	2.730 lm - 5.180 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Opal (270°) 0	1.130mm (21W) 3	2.700K (130 lm/W) 2	On / Off 1	○ White (9003) 1
		1.410mm (27W) 4	3.000K (135 lm/W) 3	Casambi 5	● Black (9005) 2
		1.690mm (32W) 5	4.000K (140 lm/W) 4	Tuya 7 ①	🌈 Custom RAL
		1.970mm (37W) 6	RGB (58 lm/W) 7	Dali / Push 8	
			1.800-4.000K (90 lm/W) 9		

Code: 4 0




① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.





Tubi wall

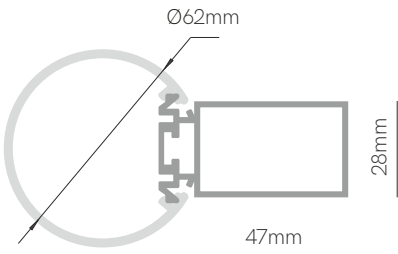

*Finished luminaire. Includes base wall and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information

Power	35W / 44W / 53W
Lumens	3.500 lm - 5.883 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 7	Opal (270°) 9	1.130mm (35W) 3	2.700K (100 lm/W) 2	On / Off 1	○ White (9003) 1
		1.410mm (44W) 4	3.000K (105 lm/W) 3	Dali 2	● Black (9005) 2
		1.690mm (53W) 5	4.000K (111 lm/W) 4	Push 3	🌈 Custom RAL
			RGB-W (100 lm/W) 8	Casambi 5	
			2.700-5.500K (105 lm/W) 9	Tuya 7	

Code: 7 9



ⓘ Consult delivery terms and conditions.



*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Connecta Fisioteràpia i Salut, Barcelona (Spain).

Grip

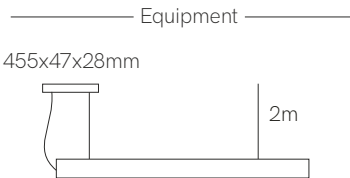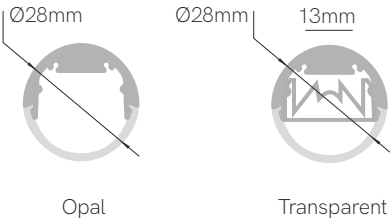

*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	26W / 33W / 39W / 46W
Lumens	2.522 lm - 4.968 lm
Installation	Pendant
Material	Aluminium and polycarbonate
PCB	Flex (Fine 52)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 2	Opal (100°) 4	1.130mm (26W) 3	2.700K (97 lm/W) 2	On / Off 1	● Black (9005) 2
	Transparent (30°) 8	1.410mm (33W) 4	3.000K (103 lm/W) 3	Dali 2	①  Custom RAL
		1.690mm (39W) 5	4.000K (108 lm/W) 4	Push 3	
		1.970mm (46W) 6	RGB (100 lm/W) 8	Casambi 5	
			2.700-5.500K (105 lm/W) 9	Tuya 7	

Code: 2 



① Consult delivery terms and conditions.



*Create your code according to your preferences. RGB and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Beneito Faure, La Roca del Vallès, Barcelona (Spain).

Nyneto

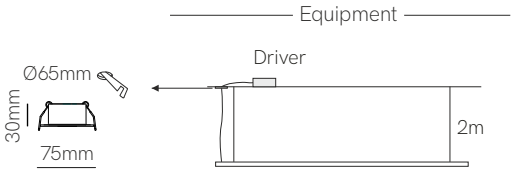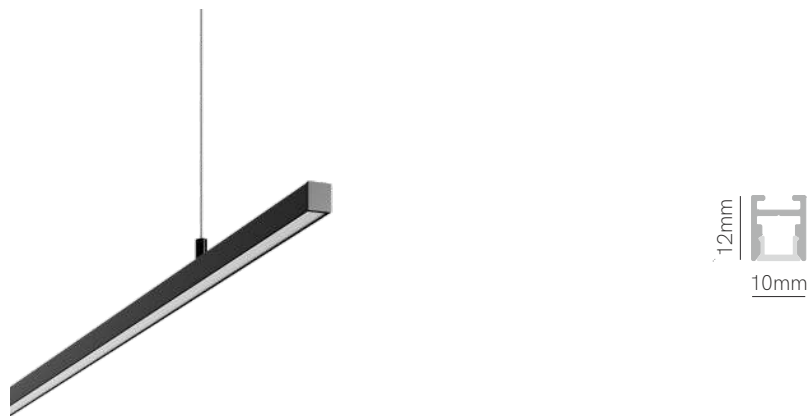

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	16W / 20W / 24W / 28W
Lumens	896 lm - 1.848 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 88)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 8	Opal (100°) 8	1.120mm (16W) 3	2.700K (56 lm/W) 2	On / Off 1	☐ White (9003) 1
		1.410mm (20W) 4	3.000K (61 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.690mm (24W) 5	4.000K (66 lm/W) 4	Push 3 	 Custom RAL
		1.970mm (28W) 6		Casambi 5	
				Tuya 7	

Code: 8 8    




 Consult delivery terms and conditions.
*Create your code according to your preferences.





Minimus

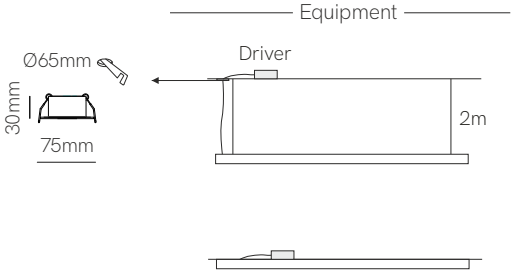

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	25W / 31W / 37W / 43W
Lumens	2.425 lm - 4.644 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 52)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Opal prism (100°) 8	1.170mm (25W) 2	2.700K (97 lm/W) 2	On / Off 1	☐ White (9003) 1
		1.420mm (31W) 4	3.000K (103 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.720mm (37W) 6	4.000K (108 lm/W) 4	Push 3 	 Custom RAL
		1.970mm (43W) 8		Casambi 5	
				Tuya 7	

Code: 5 8    





 Consult delivery terms and conditions.

*Create your code according to your preferences.





Vision

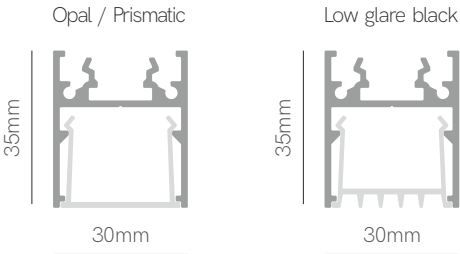

*Finished luminaire. Includes suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	33W / 42W / 51W / 59W
Lumens	1.980 lm - 9.440 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code V	Opal (90°) 4	1.130mm (33W) 3	2.700K (150 lm/W) 2	On / Off 1	☐ White (9003) 1
	Prismatic (70°) 6	1.410mm (42W) 4	3.000K (155 lm/W) 3	Dali 2	☒ Black (9005) 2
	Low glare black 9	1.690mm (51W) 5	4.000K (160 lm/W) 4	Push 3 	 Custom RAL
		1.970mm (59W) 6	RGB-W (60 lm/W) 8	Casambi 5	
			2.700-5.500K (100 lm/W) 9	Tuya 7	

Code: **V**     




 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Quick

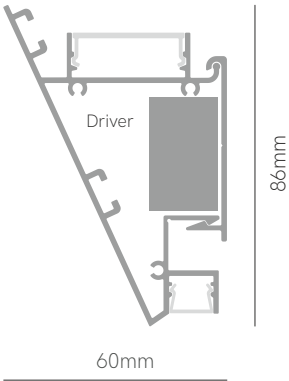

*Finished luminaire. Includes power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	20W / 30W / 41W / 51W / 61W / 71W
Lumens	1.800 lm - 9.656 lm
Installation	Wall
Material	Aluminium 6063
PCB	Flex / Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Opal (100°) 8	570mm (20W) 1	Down-Up 2.700K (124 lm/W) 2	On / Off 1	☐ White (9003) 1
		850mm (30W) 2	Down-Up 3.000K (128 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.130mm (41W) 3	Down-Up 4.000K (136 lm/W) 4	Push 3	☒ Custom RAL
		1.410mm (51W) 4	Down-Up RGB (100 lm/W) 8	Casambi 5	
		1.690mm (61W) 5	Down-Up 1.800-4.000K (90 lm/W) 9	Tuya 7	
		1.970mm (71W) 6	Down 1.800-4.000K Up RGB C		
			Down 2.700K Up RGB D		
			Down 3.000K Up RGB T		
			Down 4.000K Up RGB Q		

Code: 4 8




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.






Dau E

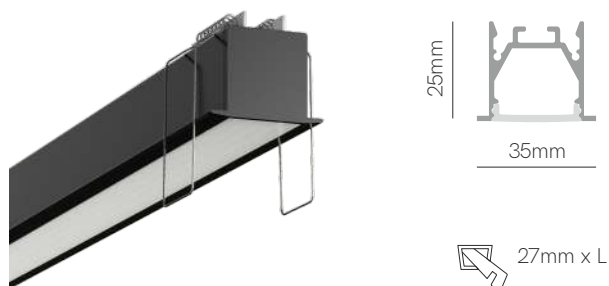


*Finished luminaire. Includes power supply, spring clips, power cable and end caps.



Dau



*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.



Control accessories:  page 327

 pages 326-333

 pages 334-335




Technical Information

Power	18W / 23W / 26W / 30W
Lumens	1.800 lm - 3.420 lm
Installation	Recessed and Surface / Pendant

Material	Aluminium 6063
PCB	Flex (Fine 61)

Code / Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Dau E Opal (110°) 16	1.170mm (18W) 3	2.700K (100 lm/W) 2	On / Off 1	☐ White (9003) 1
Dau Opal (110°) 15	1.420mm (23W) 4	3.000K (105 lm/W) 3	Dali 2	☒ Black (9005) 2
	1.720mm (26W) 5	4.000K (111 lm/W) 4	Push 3	☒ Custom RAL
	1.970mm (30W) 6	5.000K (114 lm/W) 5	Casambi 5	
		RGB-W (100 lm/W) 8	Tuya 7	
		2.700-5.500K (105 lm/W) 9		

Code:





 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.






Square




530 x 530mm



530 x 1.030mm

Equipment

455x47x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327

 pages 326-333

 pages 334-335



Technical Information

Power	43W / 62W
Lumens	4.300 lm - 6.882 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 61)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 3	Opal (110°) 3	530 x 530mm (43W) 4	2.700K (100 lm/W) 2	On / Off 1	 White (9003) 1
		530 x 1.030mm (62W) 8	3.000K (105 lm/W) 3	Dali 2	 Black (9005) 2
			4.000K (111 lm/W) 4	Push 3 	 Matt Gold 4
			RGB-W (100 lm/W) 8	Casambi 5 	 Silver 5
			2.700-5.500K (105 lm/W) 9	Tuya 7 	 Custom RAL


Code: **3** **3**    



 Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.




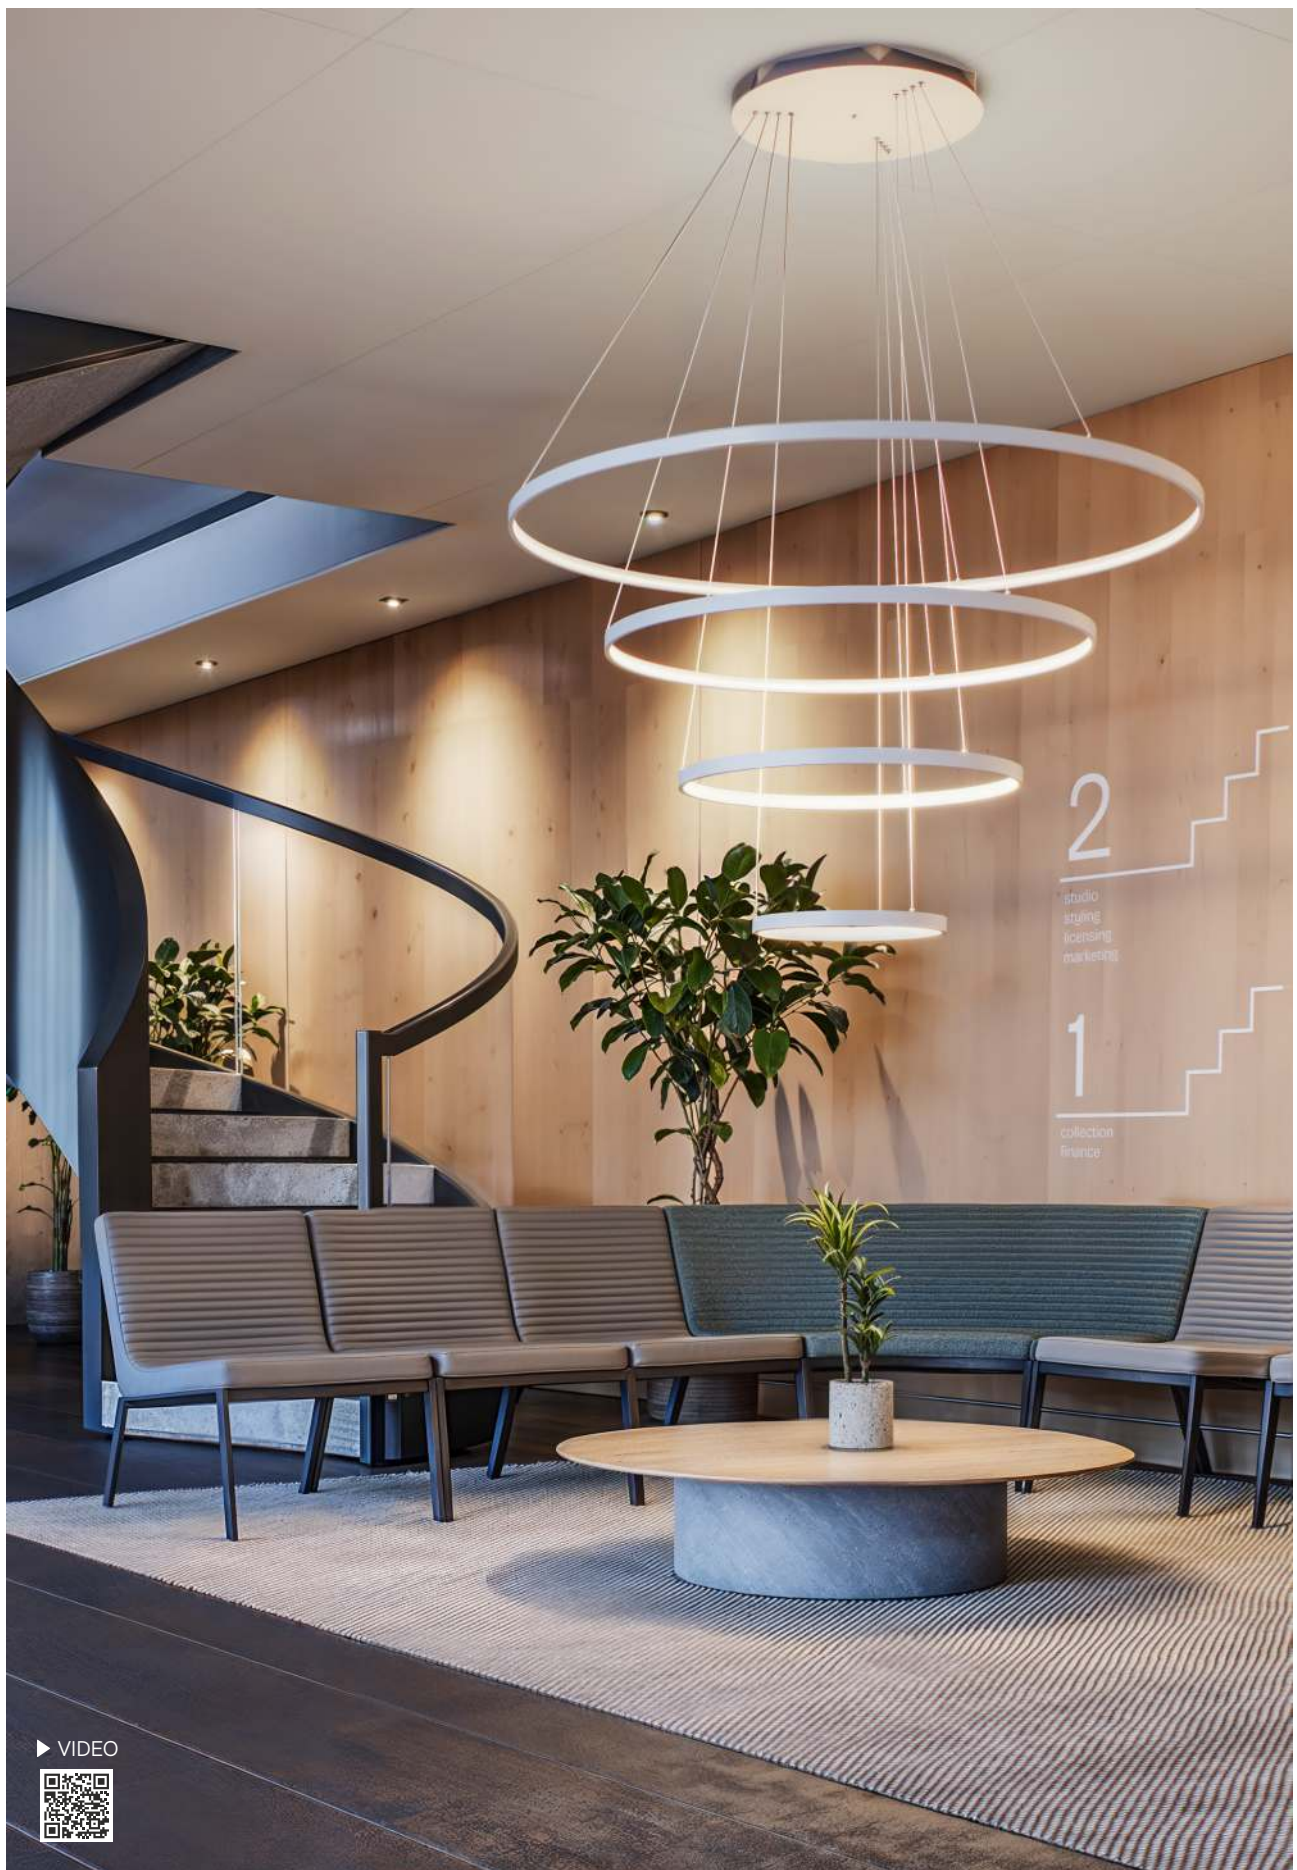


▶ VIDEO




NEW

Zero Q

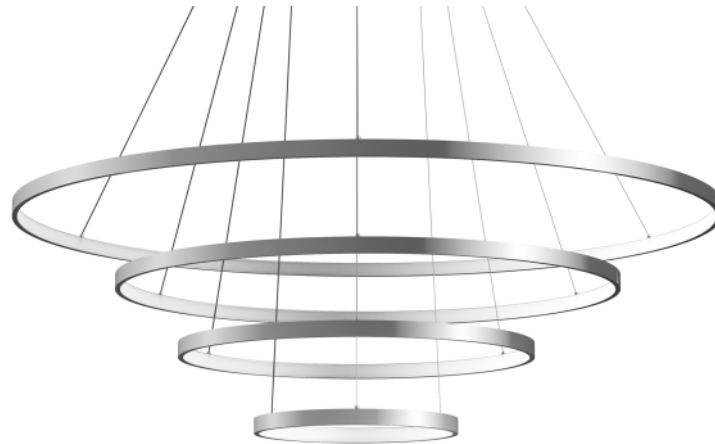


Ø400/700/1.000/1.400mm

Tolerance ±10%



Equipment

Ø500x45mm



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327

 pages 326-333

 pages 334-335




Technical Information

Power	246W
Lumens	14.760 lm - 17.712 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size	CCT (lm/W)	Driver	Colour
Code Z	Opal (100°) Q	400+700+1.000+1.400mm 6	2.700K (60 lm/W) 2	On / Off 1	○ White (9003) 1
			3.000K (66 lm/W) 3	Dali / Push 2	● Black (9005) 2
			4.000K (72 lm/W) 4	Casambi 4 ①	● Matt Gold 4
			2.700-5.500K (70 lm/W) 9	Tuya 5 ①	● Silver 5
					①  Custom RAL

Code: **Z** **Q** **6**



① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.




NEW

Zero D



Equipment

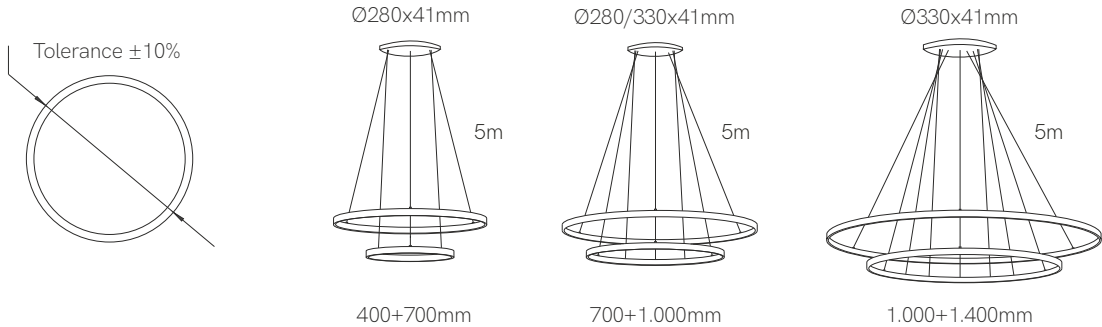

*Finished luminaire. Includes power supply, suspension kit and power cable.


Control accessories:  page 327  pages 326-333  pages 334-335

Technical Information

Power	78W / 120W / 180W
Lumens	4.680 lm - 12.960 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size	CCT (lm/W)	Driver	Colour
Code Z	Opal (100°) D	400+700mm 1	2.700K (60 lm/W) 2	On / Off 1	○ White (9003) 1
		700+1.000mm 2	3.000K (66 lm/W) 3	Dali / Push 2	● Black (9005) 2
		1.000+1.400mm 3	4.000K (72 lm/W) 4	Casambi 4 ⓘ	● Matt Gold 4
			2.700-5.500K (70 lm/W) 9	Tuya 5 ⓘ	● Silver 5
					ⓘ  Custom RAL

Code: **Z** **D**    




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.






NEW

Zero T



Equipment



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327

 pages 326-333

 pages 334-335




Technical Information

Power	148W / 218W
Lumens	8.880 lm - 15.696 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size	CCT (lm/W)	Driver	Colour
Code Z	Opal (100°) T	400+700+1.000mm 4	2.700K (60 lm/W) 2	On / Off 1	○ White (9003) 1
		700+1.000+1.400mm 5	3.000K (66 lm/W) 3	Casambi 5	● Black (9005) 2
			4.000K (72 lm/W) 4	Tuya 7 	● Matt Gold 4
			2.700-5.500K (70 lm/W) 9	Dali / Push 8 	● Silver 5
					 Custom RAL

Code: **Z** **T**    



 Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.






► VIDEO



Zero in XL

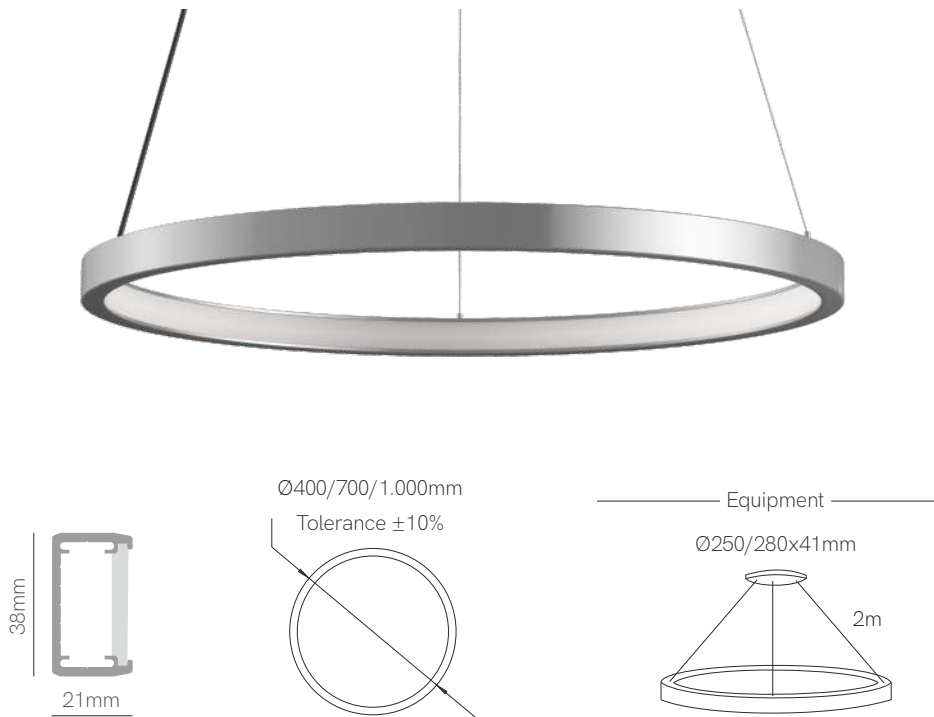

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	37W / 65W / 94W
Lumens	3.885 lm - 10.810 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 9	Opal (100°) 1	400mm (37W) 1	2.700K (105 lm/W) 2	On / Off 1	○ White (9003) 1
		700mm (65W) 2	3.000K (110 lm/W) 3	Dali 2	● Black (9005) 2
		1.000mm (94W) 9	4.000K (115 lm/W) 4	Push 3 ①	● Matt Gold 4
			RGB-W (60 lm/W) 7	Casambi 5 ①	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7 ①	● Custom RAL


Code: 9 1



① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



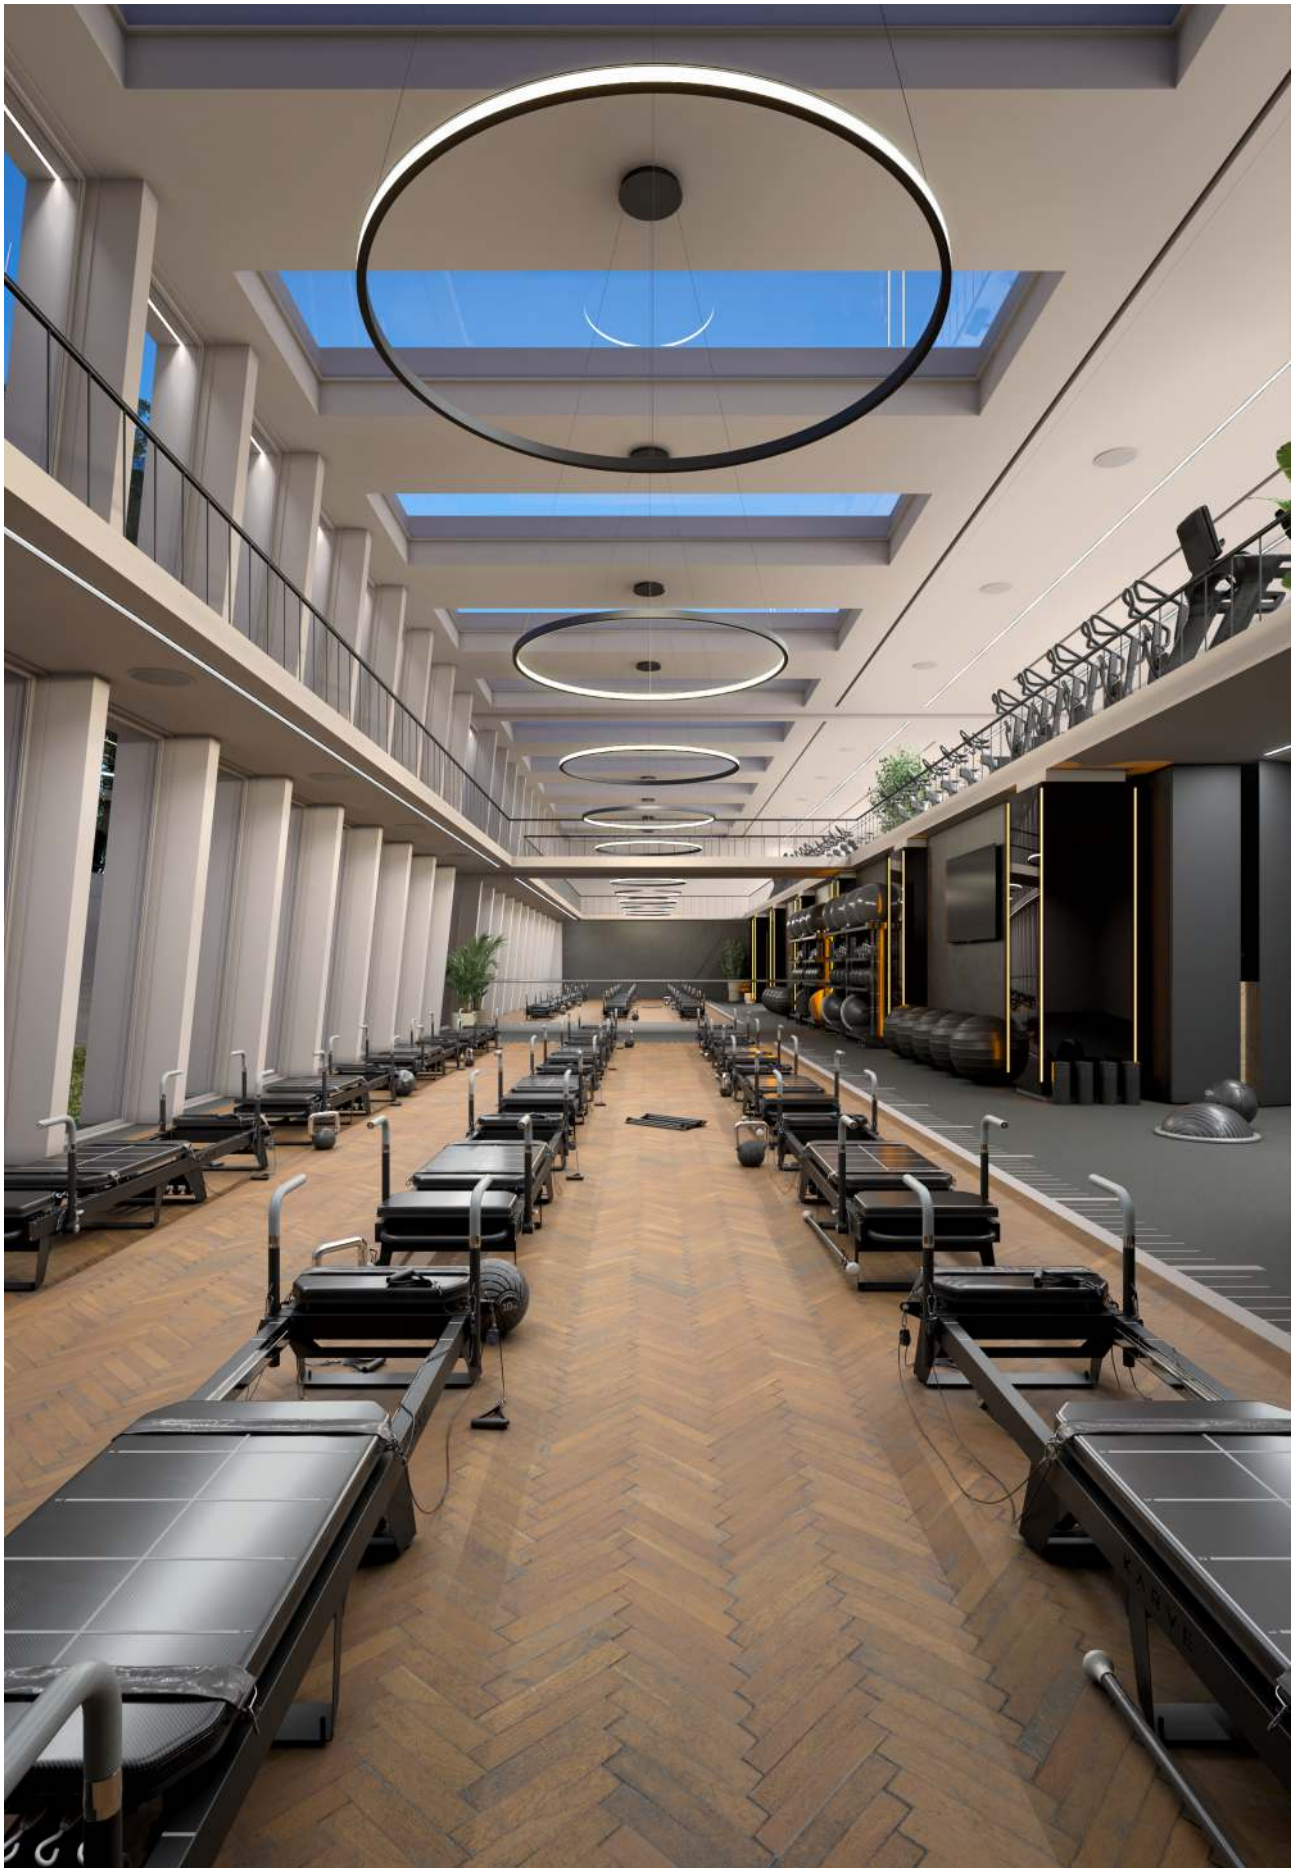

Zero out XL



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	37W / 65W / 94W
Lumens	3.885 lm - 10.810 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 9	Opal (100°) 2	400mm (37W) 1	2.700K (105 lm/W) 2	On / Off 1	○ White (9003) 1
		700mm (65W) 2	3.000K (110 lm/W) 3	Dali 2	● Black (9005) 2
		1.000mm (94W) 9	4.000K (115 lm/W) 4	Push 3 ①	● Matt Gold 4
			RGB-W (60 lm/W) 7	Casambi 5 ①	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7 ①	● Custom RAL

Code: 9 2





① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Zero in

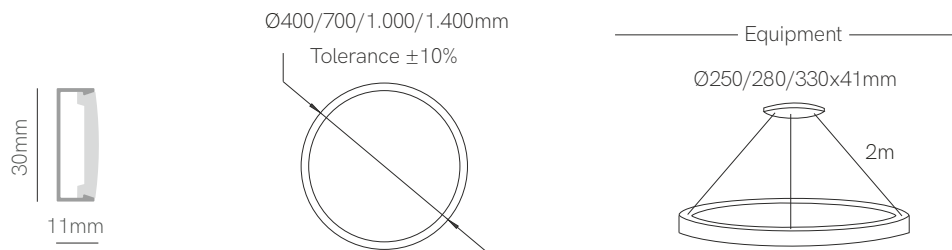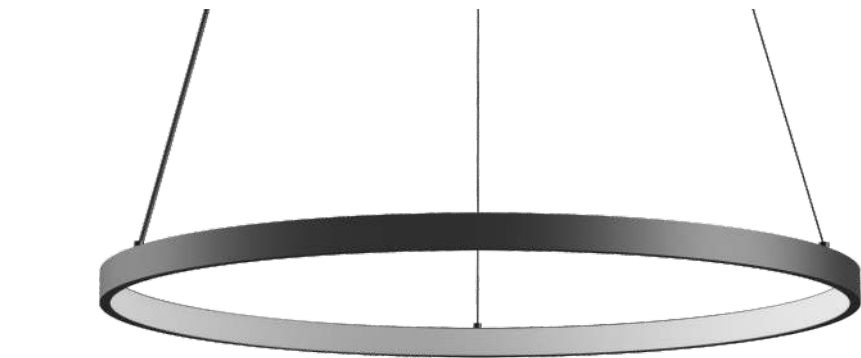

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 1	Opal (100°) 2	400mm (26W) 2	2.700K (60 lm/W) 2	On / Off 1	○ White (9003) 1
		700mm (44W) 4	3.000K (66 lm/W) 3	Dali 2	● Black (9005) 2
		1.000mm (63W) 6	4.000K (72 lm/W) 4	Push 3 ①	● Matt Gold 4
		① 1.400mm (96W) 8	RGB-W (50 lm/W) 8	Casambi 5 ①	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7 ①	● Custom RAL

Code: 1 2



① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Zero out



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 1	Opal (100°) 4	400mm (26W) 2	2.700K (60 lm/W) 2	On / Off 1	○ White (9003) 1
		700mm (44W) 4	3.000K (66 lm/W) 3	Dali 2	● Black (9005) 2
		1.000mm (63W) 6	4.000K (72 lm/W) 4	Push 3 ①	● Matt Gold 4
		① 1.400mm (96W) 8	RGB-W (50 lm/W) 8	Casambi 5 ①	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7 ①	● Custom RAL

Code: 1 4



① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Circus in XL



Circus out XL



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	37W / 65W / 94W
Lumens	3.885 lm - 10.810 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 9	IN Opal (100°) 0	400mm (37W) 2	2.700K (105 lm/W) 2	On / Off 1	○ White (9003) 1
	OUT Opal (100°) 8	700mm (65W) 4	3.000K (110 lm/W) 3	Dali 2	● Black (9005) 2
		1.000mm (94W) 6	4.000K (115 lm/W) 4	Push 3	● Matt Gold 4
			RGB-W (60 lm/W) 7	Casambi 5	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7	● Custom RAL


Code: 9



ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





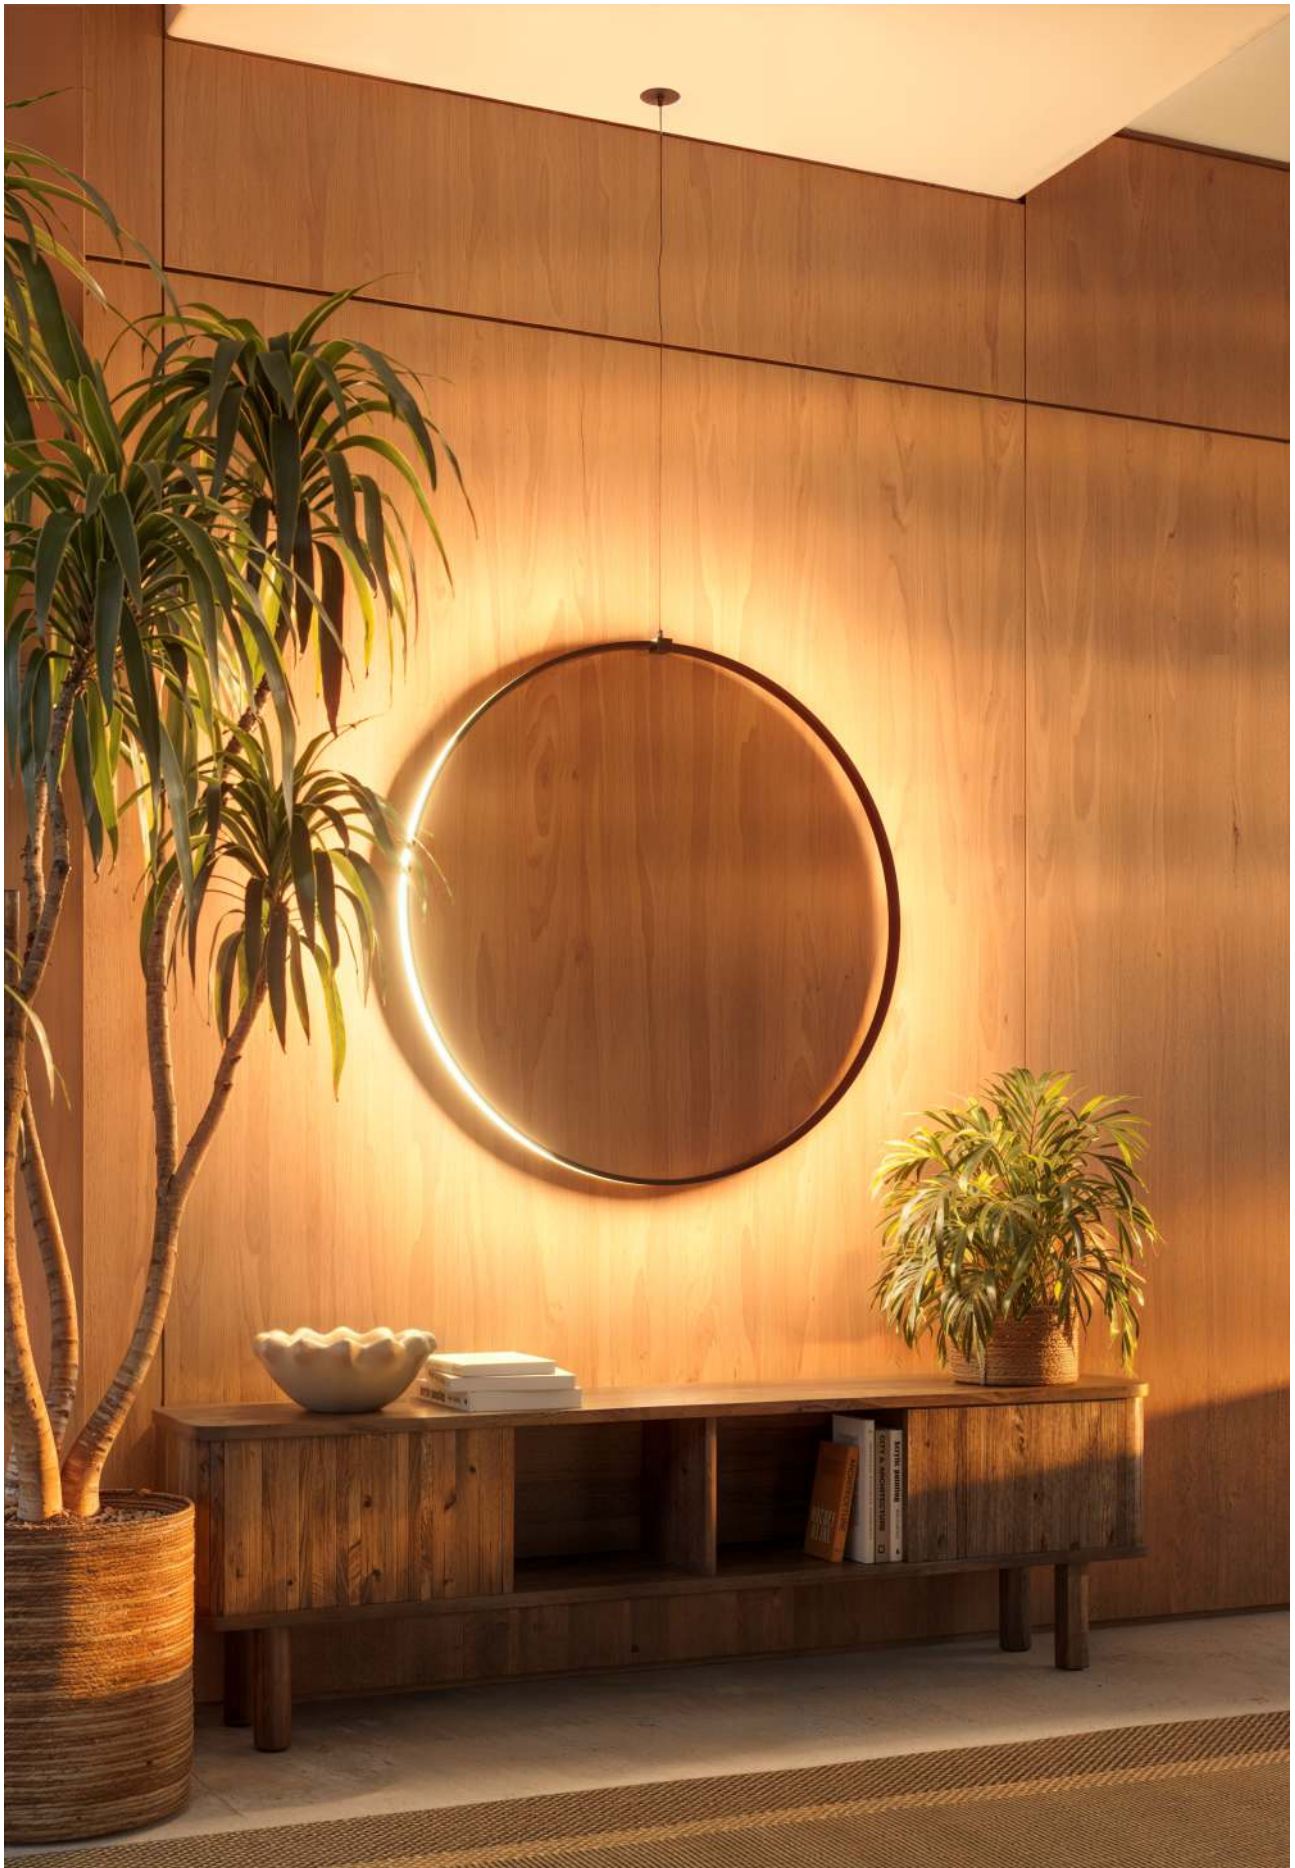

Circus in



Circus out

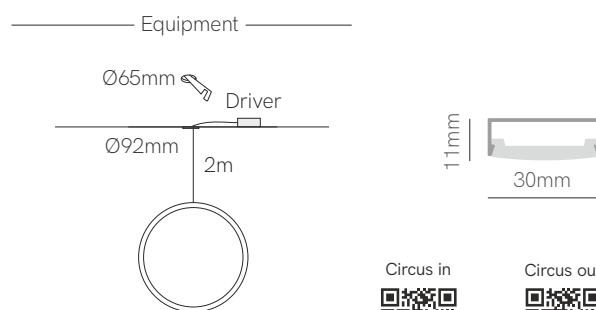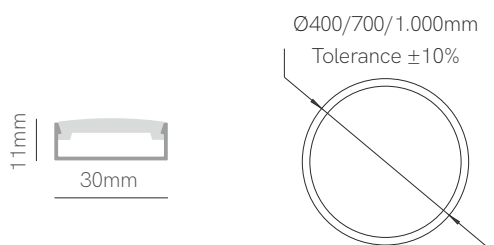

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information

Power	26W / 44W / 63W
Lumens	1.560 lm - 4.536 lm
Installation	Pendant
Material	Aluminium 6063
Material	Flex (Fine 56)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 1	IN Opal (100°)	0	400mm (26W) 2	On / Off 1	○ White (9003) 1
	OUT Opal (100°)	1	700mm (44W) 4	Dali 2	● Black (9005) 2
			1.000mm (63W) 6	Push 3	● Matt Gold 4
			RGB-W (50 lm/W) 8	Casambi 5	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7	Custom RAL

Code: 1




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Tundra

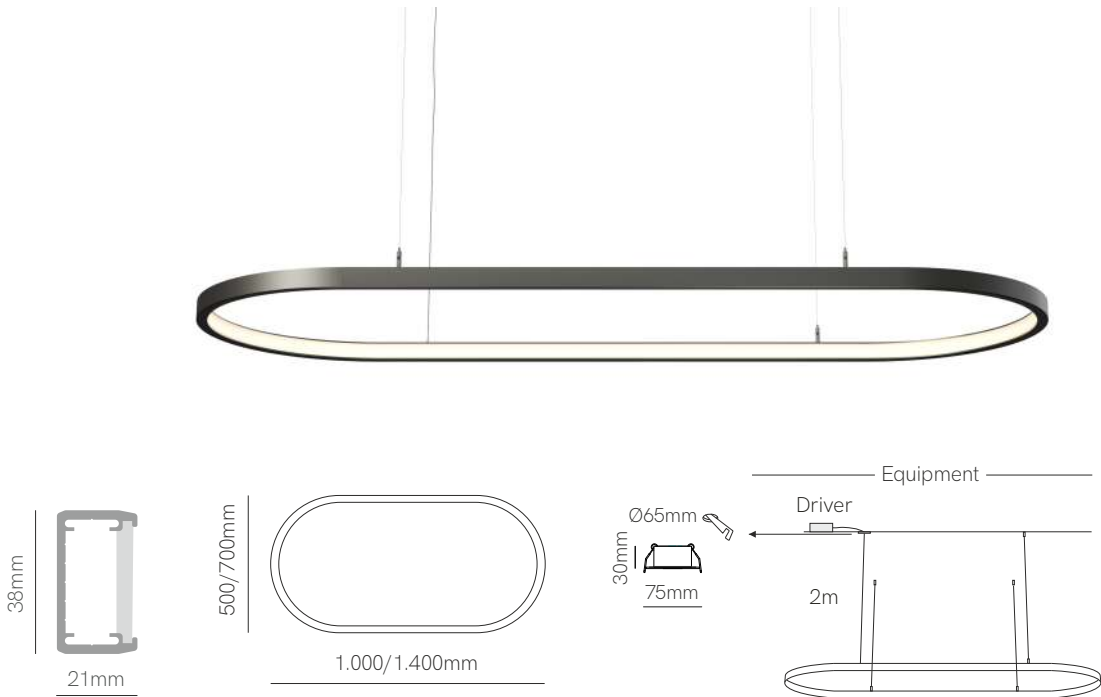

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	77W / 112W
Lumens	8.085 lm - 12.880 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code	Diffuser (Angle)	Size	CCT (lm/W)	Driver	Colour
Code 8	Opal (100°) 6	500 x 1.000mm (77W) 4	2.700K (105 lm/W) 2	On / Off 1	○ White (9003) 1
		700 x 1.400mm (112W) 6	3.000K (110 lm/W) 3	Dali 2	● Black (9005) 2
			4.000K (115 lm/W) 4	Push 3 ①	● Matt Gold 4
			RGB-W (60 lm/W) 8	Casambi 5 ①	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7 ①	● Custom RAL

Code: 8 6




① Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Zero direct XL

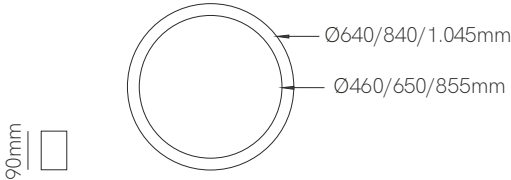

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	78W / 105W / 131W
Lumens	5.382 lm - 10.349 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 1	Opal (100°) 3	640mm (78W) 2	2.700K (69 lm/W) 2	On / Off 1	○ White (9003) 1
		840mm (105W) 5	3.000K (75 lm/W) 3	Dali 2	● Black (9005) 2
		1.045mm (131W) 6	4.000K (79 lm/W) 4	Push 3	
				Casambi 5	

Code: 1 3





*Create your code according to your preferences.






Zero direct

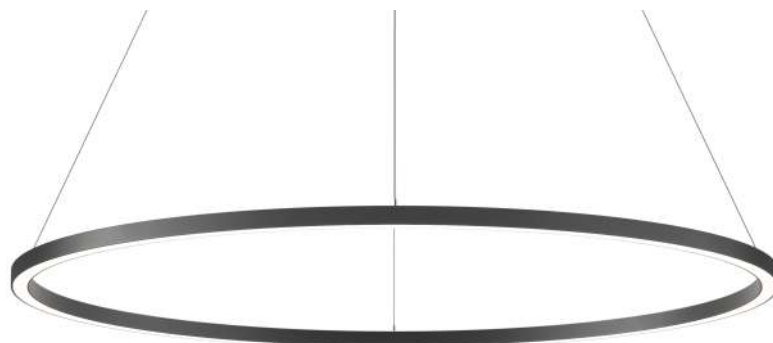

Ø520/800/1.200/1.500/3.000mm



Tolerance ±10%



Equipment

Ø250/280x41mm

Ø80x29mm



Ø520/800/1.200/1.500mm

Ø3.000mm

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327

 pages 326-333

 pages 334-335




Technical Information

Power	35W / 55W / 75W / 94W / 189W
Lumens	2.310 lm - 14.742 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 1	Opal (100°) 7	520mm (35W) 0	2.700K (66 lm/W) 2	On / Off 1	○ White (9003) 1
		800mm (55W) 2	3.000K (72 lm/W) 3	Dali 2	● Black (9005) 2
		1.200mm (75W) 6	4.000K (78 lm/W) 4	Push 3 ①	● Matt Gold 4
		1.500mm (94W) 8	2.700-5.500K (70 lm/W) 9	Casambi 5 ①	● Silver 5
		3.000mm (189W) 9		Tuya 7 ①	● Custom RAL
		Custom C			

Code: 1 7



① Consult delivery terms and conditions.


*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



Zero design

Zero 45°

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W) - Power/m	Voltage	Colour
Code Z	Opal (100°) 1	800mm (7W) 1	2.700K (66 lm/w) - 22W/m 2	24VDC 0	○ White (9003) 1
		1.500mm (13W) 4	3.000K (72 lm/w) - 22W/m 3		● Black (9005) 2
		3.000mm (26W) 7	4.000K (78 lm/w) - 22W/m 4		① ● Matt Gold 4
			CCT (70 lm/w) - 22W/m 9		① ● Silver 5
					① 🌈 Custom RAL

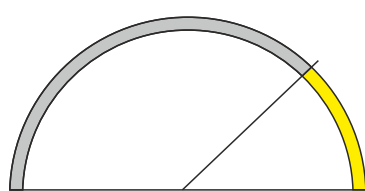


800 - 1.500 - 3.000mm
Tolerance ±10%

Code: **Z** **1** **0**

Zero 90°

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W) - Power/m	Voltage	Colour
Code Z	Opal (100°) 1	800mm (14W) 2	2.700K (66 lm/w) - 22W/m 2	24VDC 0	○ White (9003) 1
		1.500mm (26W) 5	3.000K (72 lm/w) - 22W/m 3		● Black (9005) 2
			4.000K (78 lm/w) - 22W/m 4		① ● Matt Gold 4
			CCT (70 lm/w) - 22W/m 9		① ● Silver 5
					① 🌈 Custom RAL

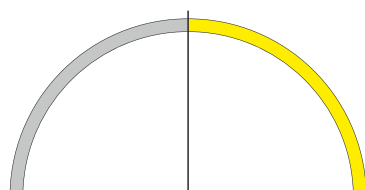


800 - 1.500mm
Tolerance ±10%


Code: **Z** **1** **0**

① Consult delivery terms and conditions.

*Create your luminaire according to your preferences.



Control accessories: **tuya** page 327




5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC |   



Zero 180°

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W) - Power/m	Voltage	Colour						
Code	Z	Opal (100°)	1	800mm (28W)	8	2.700K (66 lm/w) - 22W/m	2	24VDC	0	 White (9003)	1
		1.500mm (52W)	9	3.000K (72 lm/w) - 22W/m	3					 Black (9005)	2
				4.000K (78 lm/w) - 22W/m	4					 Matt Gold	4
				CCT (70 lm/w) - 22W/m	9					 Silver	5
										 Custom RAL	

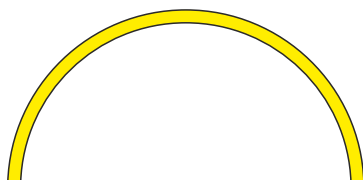

800 - 1.500mm
Tolerance ±10%

Code: **Z** **1** **0**


Zero line

Code		Diffuser (Angle)	Size (Power)	CCT (lm/W) - Power/m		Voltage		Colour	
Code	Z	Opal (100°)	1	2.500mm (55W)	0	24VDC	0	 White (9003)	1
								 Black (9005)	2
								 Matt Gold	4
								 Silver	5
								 Custom RAL	



2.500mm

Code: **Z** **1** **0**



① On demand.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver Casambi and Tuya..

Accessories (pages 176-179)



End Cap
□ 40631
■ 40632
■ 40634
■ 40635



Suspension Kit
Metallic (2m)
● 34720
○ 34721
● 34722



Ceiling
suspension
■ 40430



Kit Joint
Metallic
■ 40490
□ 40491
■ 40492



Power supplies
(pages 340-341)


Control accessories pages 294-307.

① Consult delivery terms and conditions.

*Create your luminaire according to your preferences.



5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC | Zero line 3,37m Max



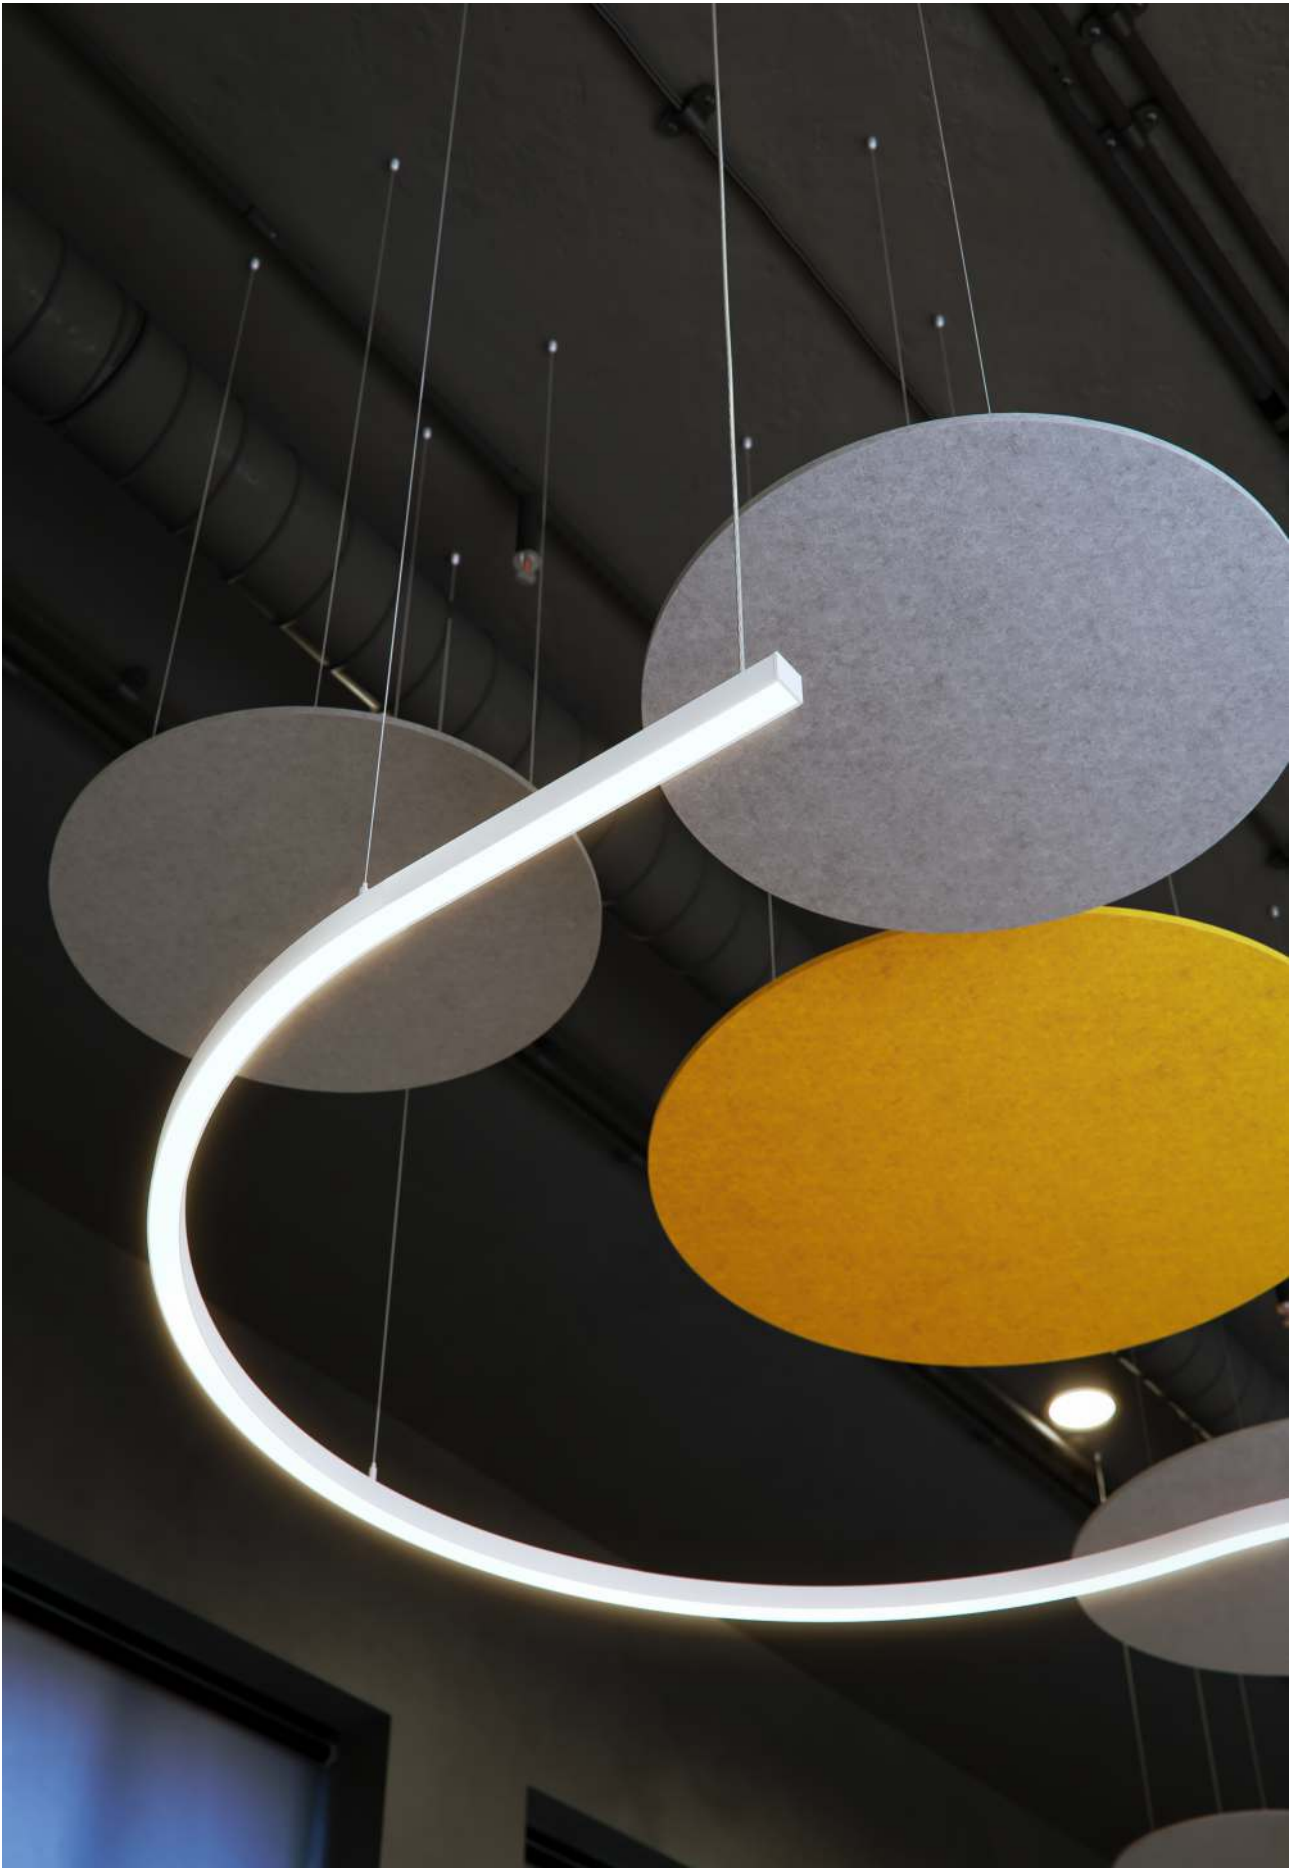






NEW

Zero up & down

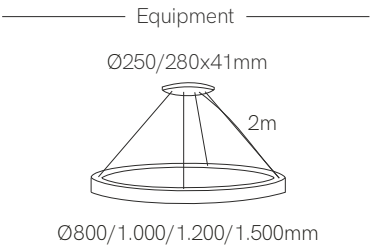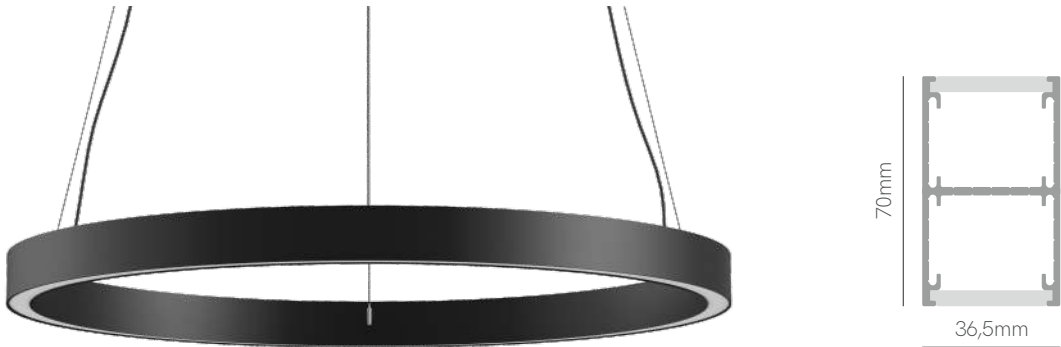

*Finished luminaire. Includes power supply, suspension kit and power cable. Double switch system for independent lighting control.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	90W / 110W / 130W / 165W
Lumens	7.740 lm - 16.170 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex Down (Fine 56) / Up (Fine 31)

Code	Switching	Size (Power Down + Up)	CCT (lm/W)	Driver	Colour
Code U	Double Switching D	800mm (57W + 33W) 2	2.700K (86 lm/W) 2	On / Off 1	 White (9003) 1
		1.000mm (70W + 40W) 4	3.000K (92 lm/W) 3	Casambi 5	 Black (9005) 2
		1.200mm (84W + 46W) 6	4.000K (98 lm/W) 4	Tuya 7 	 Custom RAL C
		1.500mm (105W + 60W) 8	2.700-5.500K (90 lm/W) 9	Dali / Push 8	

Code: **U** **D**    



 Consult delivery terms and conditions.

*Create your code according to your preferences.







▶ VIDEO



Kaa



*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information


Power	90W / 180W / 300W
Lumens	5.400 lm - 21.900 lm
Installation	Pendant
Material	Aluminium and silicone

Code	Size (Power)	CCT (lm/W)	Driver	Colour
Code	76			
	3 x 1.500mm (90W)	① 1	On / Off	1
	3 x 3.000mm (180W)	① 3	Dali	2
	3 x 5.000mm (300W)	① 5	Push	3
			Casambi	5
			Tuya	7
		2.400K (60 lm/W)		
		2.700K (65 lm/W)		
		3.000K (69 lm/W)		
		4.000K (73 lm/W)		
		RGB (41 lm/W)		
		2.700-4.200K (55 lm/W)		

Code: 76


① Included accessories

Suspension kit 2m  1 x 3
3 x 6
5 x 9 + Clip  1 x 3
3 x 6
5 x 9



① Consult delivery terms and conditions.


*Create your code according to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.






Connecta Fisioteràpia i Salut, Barcelona (Spain).

Kaa line

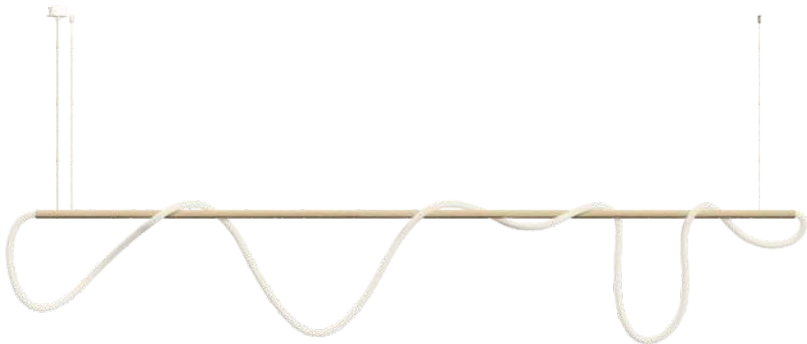

Equipment

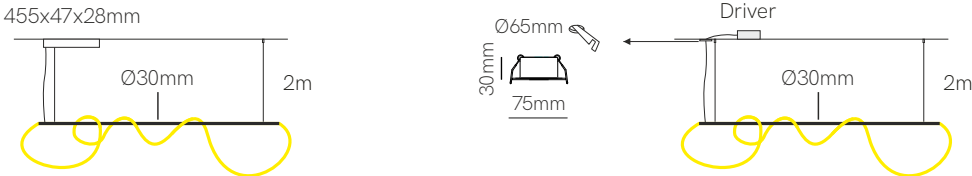

*Finished luminaire. Includes power supply, suspension kit and power.

Control accessories:  page 327  pages 326-333  pages 334-335




Technical Information

Power	30W / 60W / 100W
Lumens	1.800 lm - 7.300 lm
Installation	Pendant
Material	Aluminium and silicone

Code	Size: Stick + Led (Power)	CCT (lm/W)	Driver	Colour (stick)
Kaa line recessed 70	1.000 + 1.500mm (30W) 1	2.400K (60 lm/W) 2	On / Off 1	 White (9003) 1
Kaa line surface 74	1.600 + 3.000mm (60W) 3	2.700K (65 lm/W) 3	Dali 2	 Black (9005) 2
	2.500 + 5.000mm (100W) 5	3.000K (69 lm/W) 4	Push 3	 Matt Gold 3
		4.000K (73 lm/W) 5	Casambi 5 	 Custom RAL
		RGB (41 lm/W) 8	Tuya 7	
		2.700-4.200K (55 lm/W) 9		

Code: 





 Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.







Horizon

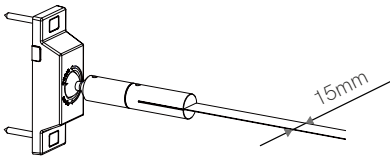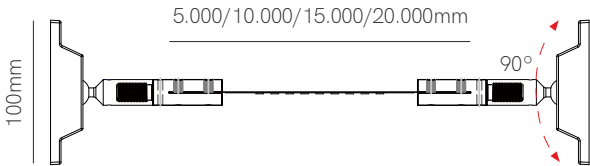

Equipment



Compatible profiles.



Technical Information

Max. power	48W - 288W
Lumens	4.560 lm - 28.800 lm
Installation	Pendant
Material	Aluminium 6063
Material	Flex

Code	Led	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 2	9,6W/m (Fine 51) 5	5.000mm 1	2.700K (95 lm/W) 2	On / Off 1	White (9003) 1
	14,4W/m (Fine 41) 7	10.000mm 2	3.000K (98 lm/W) 3		Black (9005) 2
		15.000mm 3	4.000K (100 lm/W) 4		

Code: 2 1

Accessories



2 holder
□ HRZ-01
■ HRZ-02



1m steel band (max. 25m)
□ HRZ-PLE-01
■ HRZ-PLE-02




*Led strip and power supply included.







Lift



Lift wall



Equipment



Pendant



Wall

*Finished luminaire.

Includes power cable and end caps.

Control accessories:  page 327

 pages 326-333

 pages 334-335



Technical Information

Power	33W / 42W / 51W / 59W - 16W / 27W / 35W	Material	Aluminium and polycarbonate
Lumens	1.980 lm - 9.440 lm / 1.600 lm - 3.850 lm	PCB	Pendant: Rigid / Wall: Flex
Installation	Pendant / Wall		

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Pendant 6	Opal (135°) 6	1.130mm (33W) 3	2.700K (150 lm/W) 2	On / Off 1	☐ White (9003) 1
		1.420mm (42W) 4	3.000K (155 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.700mm (51W) 5	4.000K (160 lm/W) 4	Push 3	
		1.970mm (59W) 6	RGB-W (60 lm/W) 8	Casambi 5	
			2.700-5.500K (100 lm/W) 9	Tuya 7	

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Wall 6	Opal (135°) 0	520mm (16W) 1	2.700K (100 lm/W) 2	On / Off 1	☐ White (9003) 1
		895mm (27W) 2	3.000K (105 lm/W) 3		☒ Black (9005) 2
		1.145mm (35W) 3	4.000K (110 lm/W) 4		


Code: **6** 




 Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



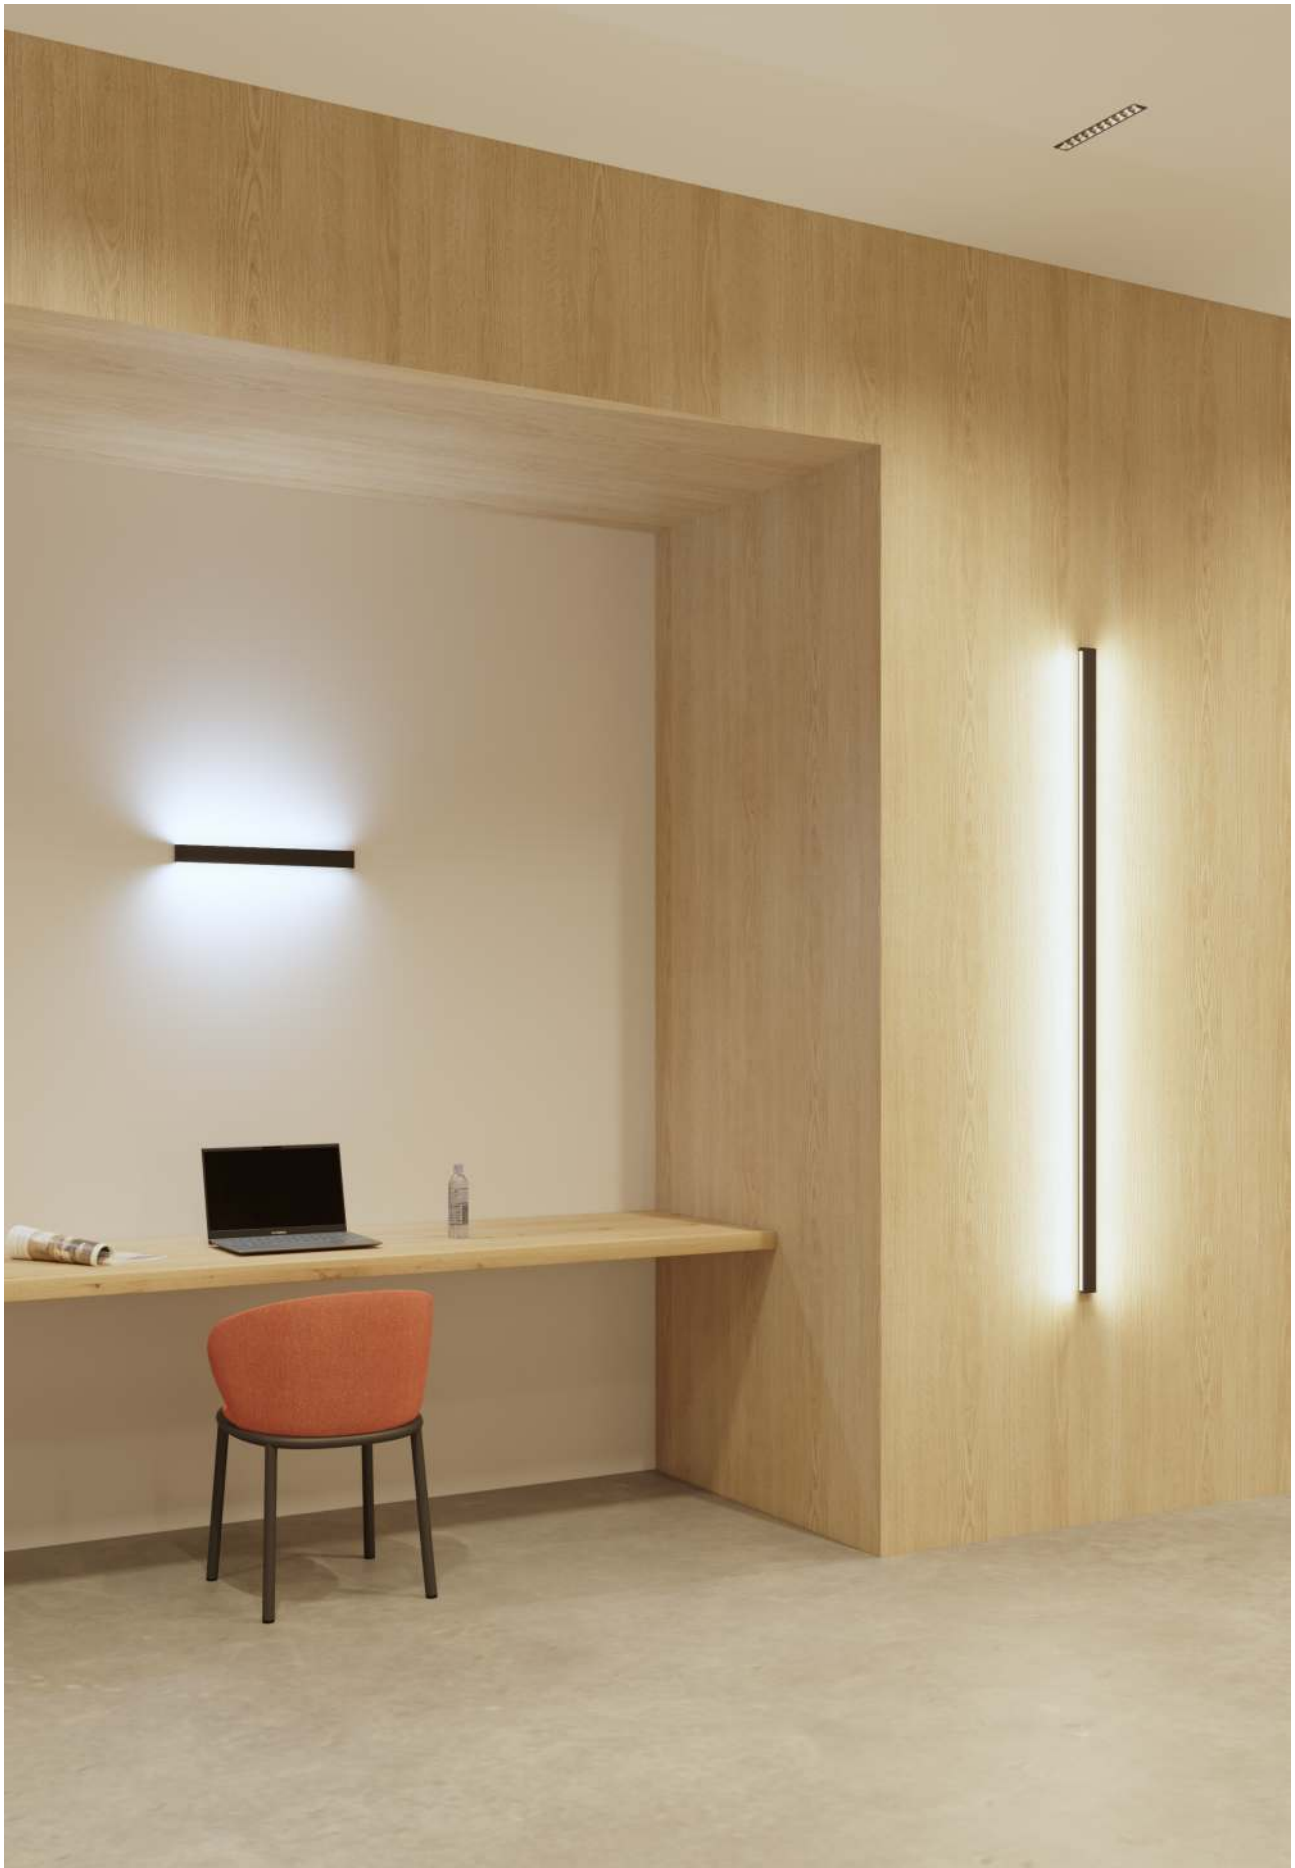

Flash



*Finished luminaire. Includes spring clips and end caps.




Technical Information

Power	16W / 27W / 35W / 46W / 55W
Lumens	1.600 lm - 6.050 lm
Installation	Wall
Material	Aluminium 6063
PCB	Flex (Fine 32)

Code	Diffuser	Size (Power)	CCT (lm/W)	Driver	Colour
Code 3	Transparent (90°) 9	520mm (16W) 1	2.700K (100 lm/W) 2	On / Off 1	☐ White (9003) 1
		895mm (27W) 2	3.000K (105 lm/W) 3		☒ Black (9005) 2
		1.145mm (35W) 3	4.000K (110 lm/W) 4		☐ Aluminium 9
		1.520mm (46W) 5	6.000K (110 lm/W) 6		① Custom RAL
		1.825mm (55W) 6			

Code: 3 9 1




① Consult delivery terms and conditions.

*Create your code according to your preferences.





Triton



*Finished luminaire. Includes power supply, clip rotatable, 2mts power cable and end caps.

Control accessories:  pages 334-335



Technical Information

Power	21W / 41W / 61W
Lumens	2.625 lm - 8.235 lm
Installation	Surface
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Asymmetric (15°/35°) 9	420mm (21W) 1	2.700K (125 lm/W) 2	On / Off 1	Black (9005) 2
		820mm (41W) 2	3.000K (130 lm/W) 3	Dali 2	Custom RAL
		1.220mm (61W) 3	4.000K (135 lm/W) 4		

Code: 4 9 2

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673




ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences.





Triton down



*Finished luminaire. Includes power supply, 2mts power cable and end caps.

Control accessories:  pages 334-335



Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	5.152 lm - 14.008 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Opal (80°) 6	1.130mm (46W) 3	2.700K (112 lm/W) 2	On / Off 1	☐ White (9003) 1
		1.410mm (57W) 4	3.000K (128 lm/W) 3	Dali 2	☒ Black (9005) 2
		1.690mm (69W) 5	4.000K (136 lm/W) 4		☒ Custom RAL
		1.970mm (80W) 6	5.500K (136 lm/W) 5		
		2.530mm (103W) 7			


Code: 4 6

 Consult delivery terms and conditions.

*Create your code according to your preferences.

Accessories

 Wall bracket ☐ 40531 ☒ 40532	 Ceiling suspension ☒ 40510	 Suspension Kit ☒ 40520 (2m)	 Linear Joint IP68 Ø26x95mm ☒ 5671	 T Joint IP68 74x118mm ☒ 5672	 X Joint IP68 122x122mm ☒ 5673
--	--	---	--	--	--



Custom system accessories

Time



End caps
☐ 40741
☒ 40742
☐ 40743



End caps
☐ 40751
☒ 40752
☐ 40753



Joint 180°
☒ 40770



Joint 90°
☒ 40990



Joint 90°
☒ 40410



Joint 120°
☒ 40666



Wall bracket
☐ 40851
☒ 40852
☐ 40853



Trimless
☒ 40339

Urban



End caps
☐ 40721
☒ 40722
☐ 40723



End caps
☐ 40731
☒ 40732
☐ 40733



Joint 180°
☒ 40220



Joint 90°
☒ 40550



Joint 90°
☒ 40610



Joint 120°
☒ 40999



Wall bracket
☐ 40851
☒ 40852
☐ 40853



Trimless
☒ 40669

Dual



Ceiling suspension
☒ 40780



Suspension kit
☒ 40790 (2m)
☒ 40795 (5m)



Joint 180°
☒ 40420



Joint 90°
☒ 40810

Zero Design



End Cap
☐ 40631
☒ 40632
☒ 40634
☐ 40635



Suspension Kit
 Metallic (2m)
☒ 34720
☐ 34721
☒ 34722



Ceiling
 suspension
☒ 40430



Kit Joint
 Metallic
☐ 40490
☐ 40491
☒ 40492

Time / Urban



Surface base
 3x0,75 (2,5m)
 Ø60x28mm
☐ 40881
☒ 40882
☐ 40883

Surface base
 5x0,5 (2,5m)
 Ø60x28mm
☐ 40991
☒ 40992
☐ 40993

Surface base
 3x0,75 (5m)
 Ø60x28mm
☐ 40581
☒ 40582
☐ 40583

Surface base
 5x0,5 (5m)
 Ø60x28mm
☐ 40591
☒ 40592
☐ 40593



Recessed base
 3x0,75 (2,5m)
 Ø75x30mm
☐ 40831
☒ 40832
☐ 40833

Recessed base
 5x0,5 (2,5m)
 Ø75x30mm
☐ 40931
☒ 40932
☐ 40933

Recessed base
 3x0,75 (5m)
 Ø75x30mm
☐ 40481
☒ 40482
☐ 40483

Recessed base
 Base 5x0,5 (5m)
 Ø75x30mm
☐ 40541
☒ 40542
☐ 40543

Pendant lamp accessories

NEW

Surface base
Ø60x30mm

○ 40191



● 40192



○ 40193

Recessed base
Ø75x30mm Cut Ø65mm

○ 40171



● 40172



○ 40173

Ceiling cable support
Ø20x45mm

○ 40201



● 40202



○ 40209

Wall cable support
Ø60x30mm

○ 40901



● 40902



○ 40909

Textile cable
3x0,75mm

○ TXT-03



● TXT-05



● TXT-08



● TXT-09



● TXT-012



● TXT-18



● TXT-20



● TXT-24



● TXT-37

Zero Design



Base Ø330x41mm

☐ Z12411	☒ Z12412	240W/24VDC ON/OFF
☐ Z12421	☒ Z12422	200W/24VDC DALI
☐ Z12431	☒ Z12432	240W/24VDC PUSH
☐ Z12451	☒ Z12452	240W/24VDC CASAMBI
☐ Z12471	☒ Z12472	240W/24VDC TUYA



Base Ø280x41mm

☐ Z11511	☒ Z11512	150W/24VDC ON/OFF
☐ Z11521	☒ Z11522	120W/24VDC DALI
☐ Z11531	☒ Z11532	150W/24VDC PUSH
☐ Z11551	☒ Z11552	150W/24VDC CASAMBI
☐ Z11571	☒ Z11572	150W/24VDC TUYA



Base Ø250x41mm

☐ Z11011	☒ Z11012	75W/24VDC ON/OFF
☐ Z11021	☒ Z11022	75W/24VDC DALI
☐ Z11031	☒ Z11032	75W/24VDC PUSH
☐ Z11051	☒ Z11052	75W/24VDC CASAMBI
☐ Z11071	☒ Z11072	75W/24VDC TUYA

Power supplies linear box



Base 455x47x28mm

☐ 35331	☒ 35332	30W/24VDC on/off
☐ 35361	☒ 35362	60W/24VDC on/off
☐ 35311	☒ 35312	100W/24VDC on/off
☐ 35351	☒ 35352	150W/24VDC on/off
☐ 35731	☒ 35732	30W/24VDC dali
☐ 35761	☒ 35762	60W/24VDC dali
☐ 35711	☒ 35712	100W/24VDC dali
☐ 35751	☒ 35752	150W/24VDC dali

Emergency NEW



Recessed LED emergency light

	Code	Battery (LiFeP04)	Led CCT	Autonomy	Corridor (C)	Driver size	Size
1.	K25411 ○	3,2V / 1,5-1,8Ah	4.000K	1 hour	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm
2.	K25412 ●	3,2V / 1,5-1,8Ah	4.000K	1 hour	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm
3.	K25431 ○	3,2V / 1,5-1,8Ah	4.000K	3 hours	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm
4.	K25432 ●	3,2V / 1,5-1,8Ah	4.000K	3 hours	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm



Surface LED emergency light

	Code	Battery (LiFeP04)	Led CCT	Autonomy	Open Area (O)	Corridor (C)	Asymmetric	Size
1.	K25731 □	3,2V / 1,5Ah	6.000/7.000K	3 hours	150 lm	228 lm	113 lm	125x125x31mm
2.	K25732 ■	3,2V / 1,5Ah	6.000/7.000K	3 hours	150 lm	150 lm	113 lm	125x125x31mm



Emergency LED conversion kit

	Code	Battery (Li-Ion)	Output voltage	Output power	Autonomy	Size
1.	K25183 □	7,26V / 3,4Ah	10-300 VDC	9W	1 hour	260x22x30mm
2.	K25189 □	14,52V / 3,4Ah	20-300 VDC	18W	1 hour	410x22x30mm




Emergency LED conversion kit

	Code	Battery (Li-Ion)	Output voltage	Output power	Autonomy	Driver size	Battery size
1.	K25619 □	10,8-5Ah	Automatically adjusted	8-36W	1 hour	160x38x29mm	230x22x23mm
2.	K25639 □	10,8-5Ah	Automatically adjusted	8-36W	3 hours	410x22x30mm	230x43x23mm



Profiles

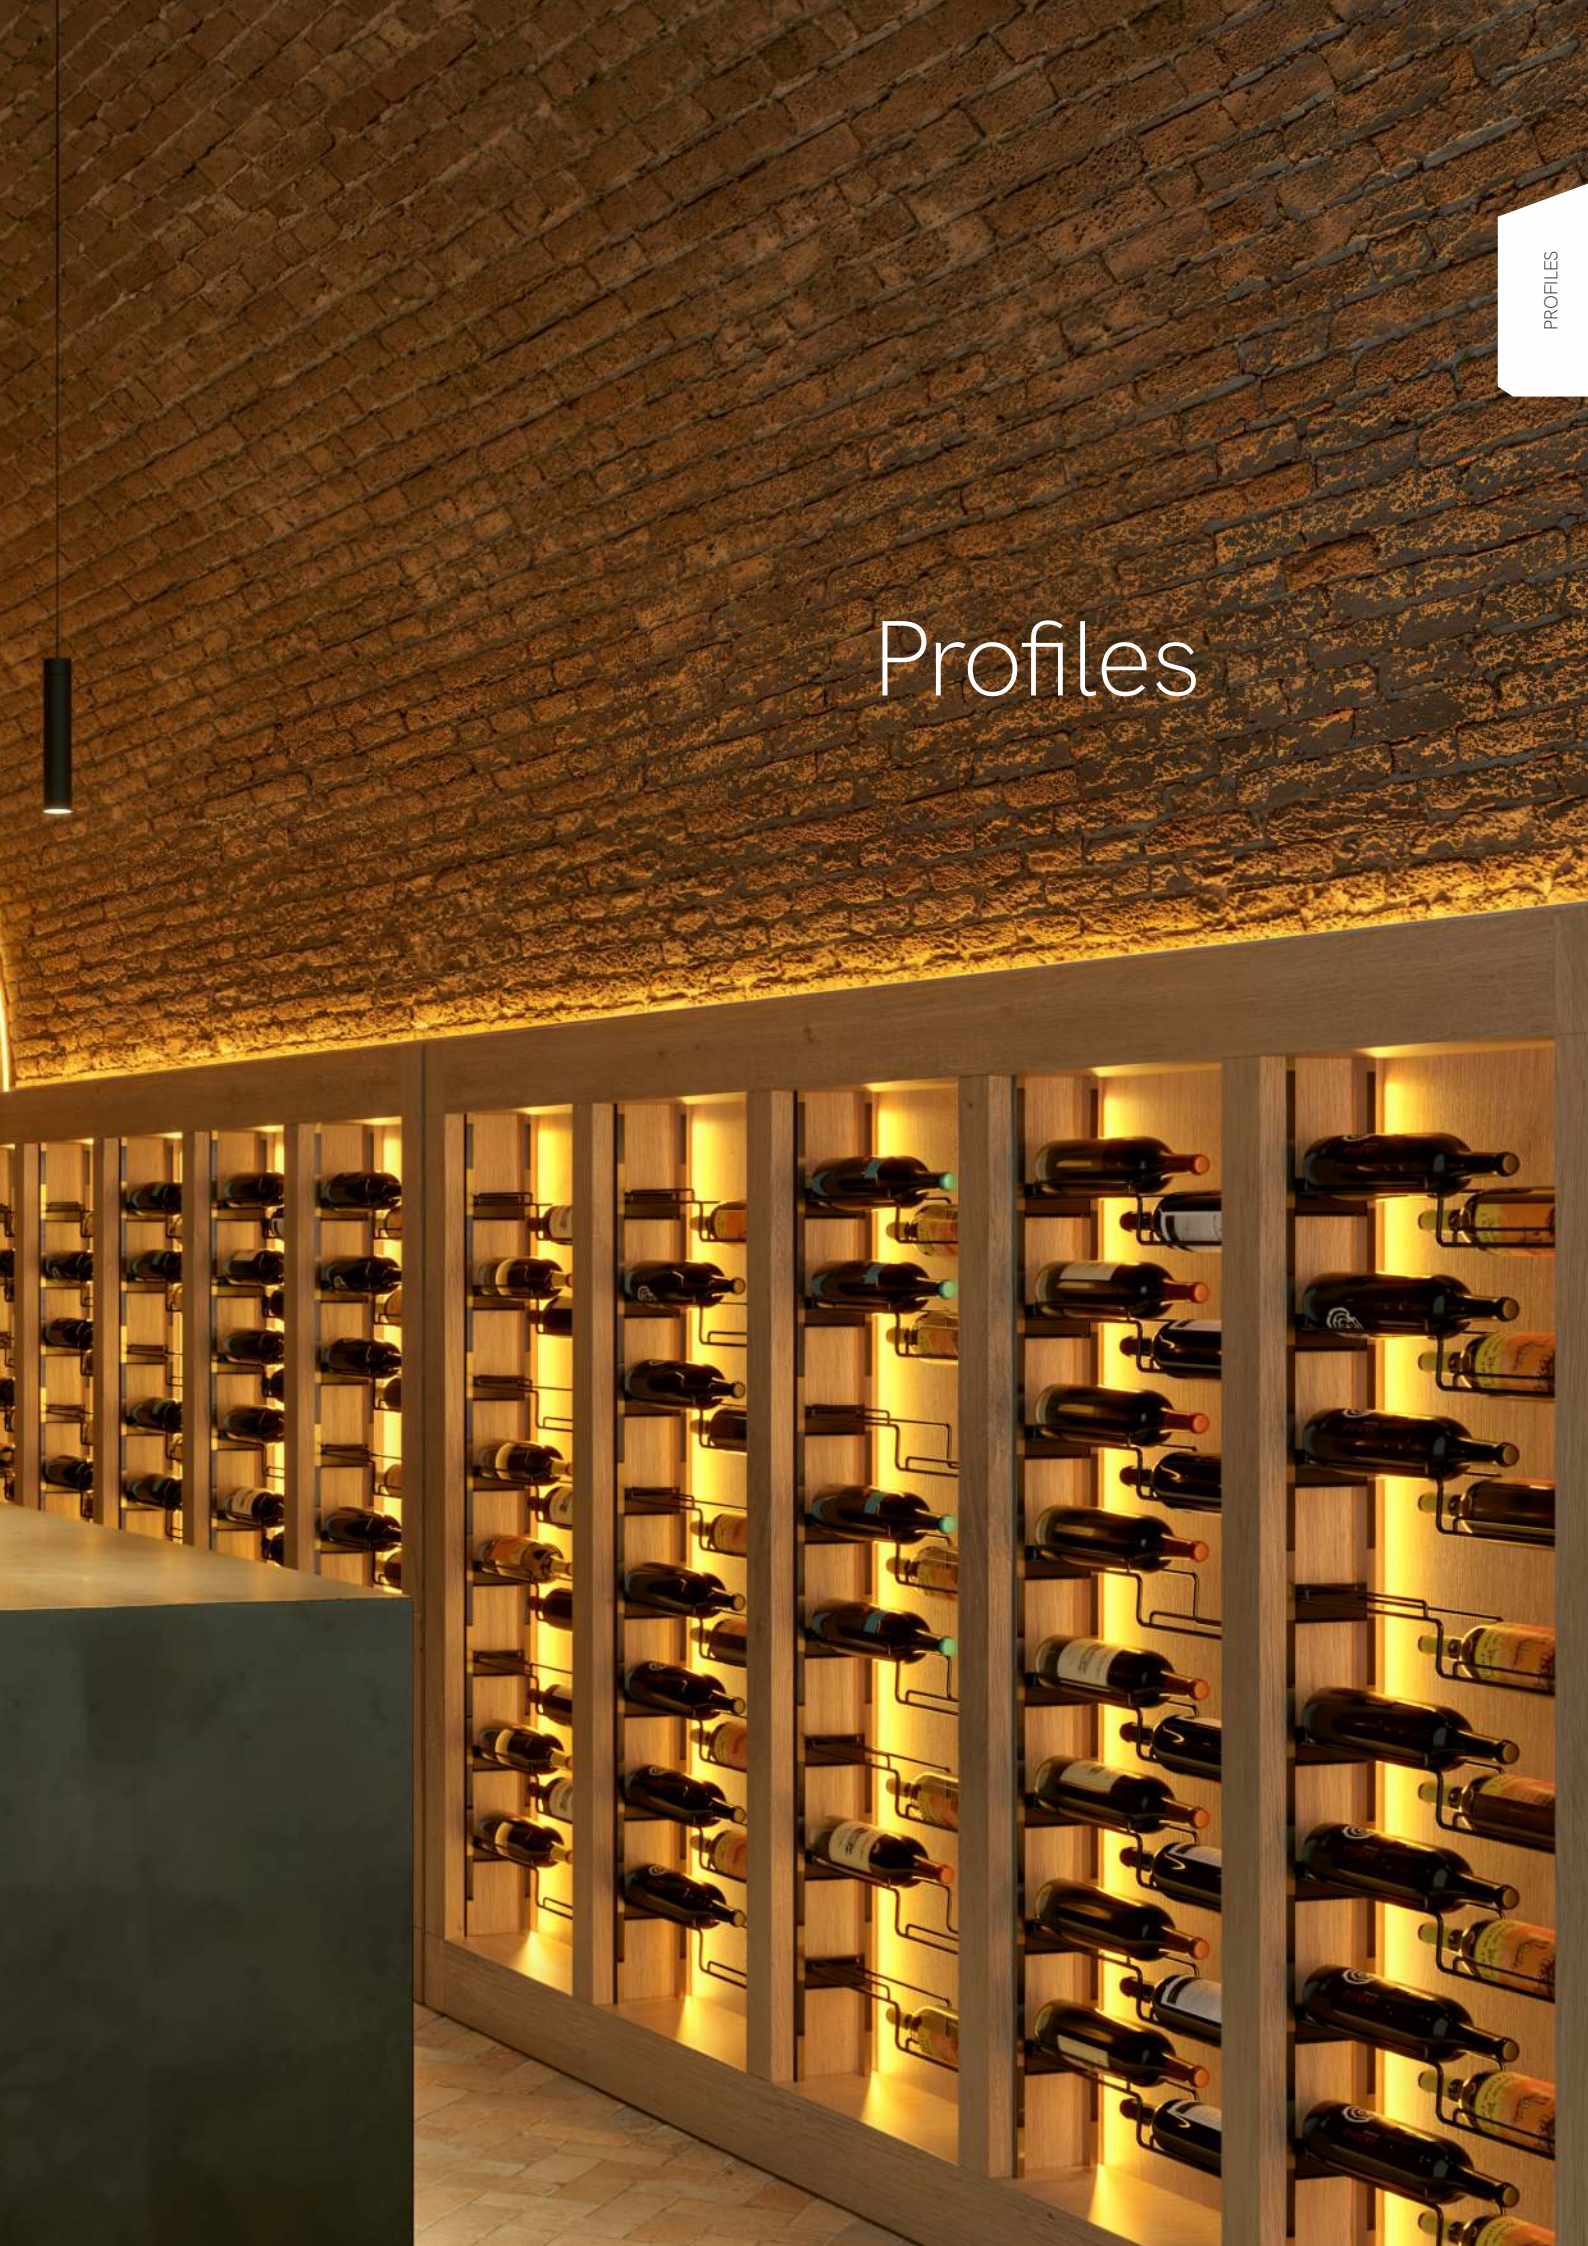

Model	Page	Section Size	Installation	
BOX 10	204	35x25 mm		Recessed
BOX 11	202	16x15 mm		Recessed
BOX 12	202	10x15 mm		Surface
BOX 13	203	17,9x5,7 mm		Surface / Flex
BOX 14	198	16x16 mm		Surface / Corner
BOX 15	189	25x7 mm		Recessed
BOX 16	189	17,3x7 mm		Surface
BOX 17	190	25x14,5mm		Recessed
BOX 18	190	17,3x14,5 mm		Surface
BOX 19	204	25x25 mm	 	Surface / Pendant
BOX 21	216	26,2x76,2 mm		Recessed
BOX 22	212	17,8x48,6 mm		Surface
BOX 23	191	23x10,8 mm		Surface
BOX 24	207	29,5x17,4 mm		Recessed
BOX 27	217	17,7x43,5 mm		Surface
BOX 28	223	18x22,2 mm		Surface
BOX 29	225	21x26mm		Recessed
BOX 30	227	12x2 mm / 20x2mm		Surface
BOX 32	211	35,9x14 mm		Trimless
BOX 33	213	29,4x50 mm		Surface
NEW BOX 34	186	Ø62 mm	 	Surface / Pendant
BOX 35	197	35x35 mm	 	Surface / Pendant


Max Power	IP	Standard finishes	Standard Size
25W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	Alum.	2m
15W MAX	20 IP	Alum.	2m
15W MAX	20 IP	Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m / 4m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m / 4m
25W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Alum.	2m
2x15W MAX	20 IP	Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
40W MAX	20 IP	Alum.	2m
25W MAX	55 IP	Alum.	2m
20W MAX 40W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White	2m
20W MAX	20 IP	White Black Alum.	2m
30W MAX	20 IP	Alum.	2m
40W MAX	20 IP	White Black Alum.	2m

	Model	Page	Section Size	Installation	
	BOX 37	205	79x32 mm		Trimless
	BOX 38	197	50x35 mm		Recessed
	BOX 39	222	Ø28 mm	 	Surface / Pendant
NEW	BOX 41	187	30x35 mm	 	Surface / Pendant
	BOX 43	194	18,5x11,8 mm		Surface
	BOX 53	191	30,5x10,8mm		Recessed
NEW	BOX 57	186	Ø40 mm	 	Surface / Pendant
	BOX 60	199	20x16 mm		Surface / Corner
	BOX 65	219	15x80 mm		Surface / Skirting
	BOX 67	221	65x28 mm		Surface / Stairs
	BOX 68	211	60x13 mm		Trimless
	BOX 69	209	56,4x13,3 mm		Trimless
	BOX 71	198	18,4x18,4 mm		Surface / Corner
	BOX 73	226	21x21 mm		Surface
	BOX 74	194	26,5x12,5 mm		Recessed
	BOX 75	195	16x24,5 mm	 	Surface / Pendant
	BOX 87	193	12,5x8,7 mm		Recessed
NEW	BOX 89	187	35x61,7 mm	 	Surface / Pendant
	BOX 92	193	18,7x10,5 mm		Recessed
	BOX 95	195	23,25x22 mm		Recessed
	BOX 98 railing	215	78,8x95 mm		Surface / Railing
	BOX 99	201	10x12 mm	 	Surface / Pendant


Max Power	IP	Standard finishes	Standard Size
40W MAX	40 IP	White	2m
40W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	Black	2m
30W MAX	20 IP	White Black	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
12W MAX	20 IP	White Black Alum.	2m
12W MAX	20 IP	Black	2m
20W MAX	20 IP	White Black	2m
15W MAX	20 IP	Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Alum.	2m
30W MAX	20 IP	White Black	2m
15W MAX	20 IP	Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
30W MAX	20 IP	White Black	2m
20W MAX	20 IP	White Black	2m

NEW


Box 34




*Useful area: 25x12mm.



Box 57



*Useful area: 15x12mm.




Box 34



Box 57



Compatible led strips.



Technical Information

Max. power	30W/m	22W/m
Installation	Surface / Pendant	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Diffuser	Opal PC 80%	Opal PC 80%
Finishes	Aluminium	Aluminium
Code	 34121	 57121

ⓘ Consult delivery terms and conditions.

Box 34 accessories



End Cap

- 34621
- 34622
- 34623

Suspension Kit
Metallic (2m)

- 34720
- 34721
- 34722

Box 57 accessories



End Cap

- 57621
- 57622
- 57623

Suspension Kit
Metallic (2m)

- 34720
- 34721
- 34722



Ceiling suspension


- 40555




3 YEARS WARRANTY | IP 20 |  |  | 2m Max 

NEW


Box 41




*Useful area: 15x5mm.




Box 89



*Useful area: 20x12mm.

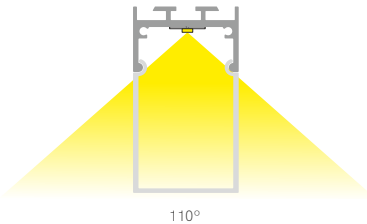

Compatible led strips.



Box 41



Box 89



Technical Information

Max. power	30W/m	30W/m
Installation	Surface / Pendant	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black	White / Black
Code	☐ 41121 ☒ 41122 Custom RAL	☐ 89121 ☒ 89122 Custom RAL

Consult delivery terms and conditions.

Box 41 accessories

Diffuser PC
Opal 80°
41440

Diffuser PC
Prismatic 83°
41450

Diffuser PC
Low glare black
41472

End Cap
41621
41622

Clip
Metallic
41330

Suspension Kit
Metallic (2m)
41780
41781
41782

Box 89 accessories


Diffuser PC
Opal 135°
89440

End Cap
89621
89622



Clip
Metallic
89330

Suspension Kit
Metallic (2m)
34720
34721
34722



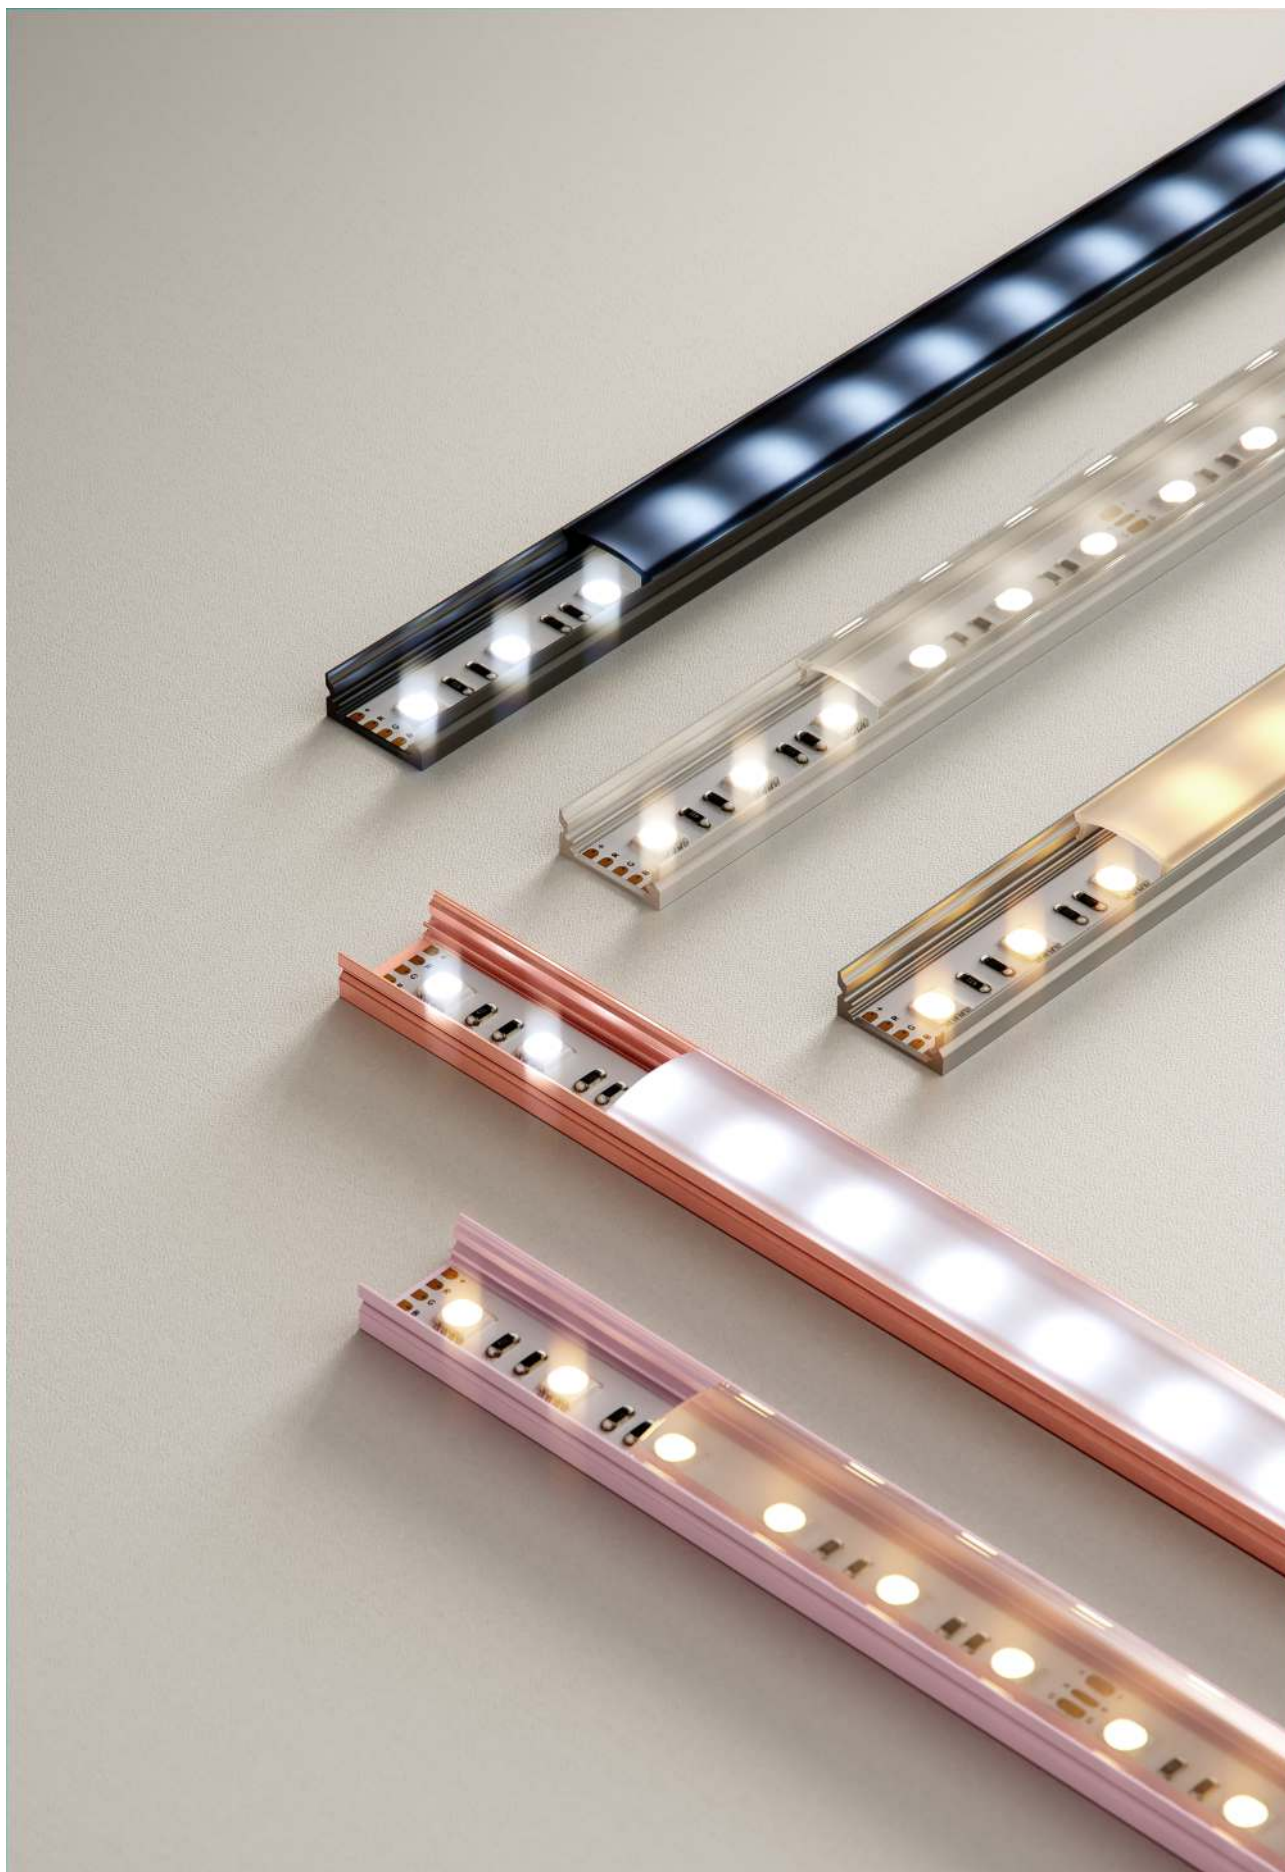

Box 15




*Useful area: 12x5mm.



115°

Box 16




*Useful area: 12x5mm.



115°

Compatible led strips.



Box 15



Box 16



Technical Information

Max. power	20W/m	20W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	☐ 15121 ☒ 15122 ☐ 15119 Custom RAL	☐ 16121 ☒ 16122 ☐ 16119 Custom RAL

Consult delivery terms and conditions.

Common accessories

Diffuser PC
Transp. 90%
☐ 20450

Diffuser PC
Opal 70%
☐ 20440

Diffuser PC
Black 50%
☒ 20472

Diffuser
Silicone
Opal 60%
(max. 60m)
☐ 20469
☐ 20469-15

Box 15 accessories

End Cap
☐ 15631
☒ 15632
☐ 15633

End Cap
☐ 15621
☒ 15622
☐ 15623

Box 16 accessories

End Cap
☐ 16631
☒ 16632
☐ 16633

End Cap
☐ 16621
☒ 16622
☐ 16623

Clip
Metallic
☐ 20330

Clip
Rotable
Metallic
☐ 20350

Clip PC
☐ 20380
☒ 20382



Box 17





Box 18



18mm x L

*Useful area: 12x10mm.



*Useful area: 12x10mm.



65°



65°



60°



Compatible led strips.



Box 17



Box 18

Technical Information

Max. power	20W/m	20W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	☐ 17121 ☒ 17122 ☐ 17119 ☒ Custom RAL	☐ 18121 ☒ 18122 ☐ 18119 ☒ Custom RAL

① Consult delivery terms and conditions.

Common accessories



Diffuser PC
Transp. 90%
☐ 20450



Diffuser PC
Opal 70%
☐ 20440



Diffuser PC
Black 50%
☒ 20472



Diffuser Silicone
Opal 60%
(max. 60m)
☐ 20469
☒ 20469-15

Box 17 accessories



End Cap
☐ 17631
☒ 17632
☐ 17633



End Cap
☐ 17621
☒ 17622
☐ 17623

Box 18 accessories



End Cap
☐ 18631
☒ 18632
☐ 18633



End Cap
☐ 18621
☒ 18622
☐ 18623



Clip
Metallic
☐ 20330



Clip
Rotable
Metallic
☐ 20350



Clip PC
☐ 20380
☒ 20382



End Cap 60°
☐ 18651
☒ 18652
☐ 18653





End Cap 60°
☐ 18661
☒ 18662
☐ 18663



Diffuser PC
Optic 60°
Transp. 90%
☐ 20430

Box 53




*Useful area: 20x6mm.




115°

Box 23




*Useful area: 20x6mm.



115°

Compatible led strips.



Box 53



Box 23



Technical Information

Max. power	25W/m	25W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	☐ 53121 ☒ 53122 ☐ 53119 Custom RAL	☐ 23121 ☒ 23122 ☐ 23119 Custom RAL

Consult delivery terms and conditions.

Common accessories



Diffuser PC
Opal 70%
☐ 23480

Box 53 accessories



End Cap
☐ 53631
☒ 53632
☐ 53633



End Cap
☐ 53621
☒ 53622
☐ 53623

Box 23 accessories



End Cap
☐ 23631
☒ 23632
☐ 23633



End Cap
☐ 23621
☒ 23622
☐ 23623




Clip PC
☐ 23380



3 YEARS WARRANTY | IP 20 | | | 2m Max



Box 87





*Useful area: 5x2,5mm.




70°

Box 92




*Useful area: 12x3mm.



95°

Compatible led strips.



Box 87



Box 92



Technical Information

Max. power	15W/m	15W/m
Installation	Recessed	Recessed
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	Black / Aluminium	Aluminium
Code	■ 87122 ■ 87119 ①  Custom RAL	■ 92119 ①  Custom RAL

① Consult delivery terms and conditions.

Box 87 accessories

Diffuser PC
Opal 70%
■ 87440

Diffuser PC
Black 50%
■ 87520

End Cap
■ 87632
■ 87633

End Cap
■ 87622
■ 87623

Clip
Metallic
■ 87330

Box 92 accessories

Difuser PC
Opal 70%
■ 92440

End Cap
■ 92633

End Cap
■ 92623

Clip
Metallic
■ 92330




Box 74



Box 43




24mm x L



*Useful area: 16x6mm.



85°



*Useful area: 14x5mm.



90°

Box 74



Box 43



Compatible led strips.



Technical Information

Max. power	25W/m	25W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	☐ 74121 ☒ 74122 ☐ 74119 ☒ Custom RAL	☐ 43121 ☒ 43122 ☐ 43119 ☒ Custom RAL

Consult delivery terms and conditions.

Common accessories



Diffuser PC
Opal 70%
☐ 43440

Box 74 accessories



End Cap
☐ 74631
☒ 74632
☐ 74633



End Cap
☐ 74621
☒ 74622
☐ 74623

Box 43 accessories



End Cap
☐ 43631
☒ 43632
☐ 43633



End Cap
☐ 43621
☒ 43622
☐ 43623



Clip
Metallic
☐ 43330




Clip 45°
Metallic
☐ 43530




3 YEARS WARRANTY | IP 20 | | | 2m Max


Box 95

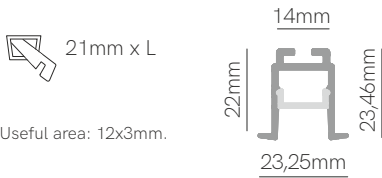

*Useful area: 12x3mm.



Compatible led strips.



Box 75



*Useful area: 12x3mm.



Box 95



Box 75



Technical Information

Max. power	22W/m	15W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	☐ 95121 ☒ 95122 ☐ 95119 Custom RAL	☐ 75121 ☒ 75122 ☐ 75119 Custom RAL


Consult delivery terms and conditions.

Common accessories




Opal
Prismatic
☐ 75440

Box 95 accessories






Box 75 accessories

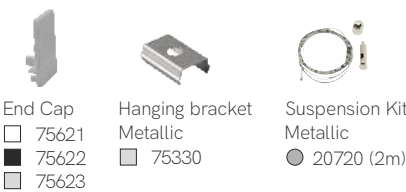




Box 38



*Useful area: 23x20mm.

Box 35



*Useful area: 23x20mm.




Box 38



Box 35



Compatible led strips.



Technical Information

Max. power	40W/m	40W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	☐ 38121 ☒ 38122 ☐ 38119 ☒ Custom RAL	☐ 35121 ☒ 35122 ☐ 35119 ☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC
Transp. 90%
☐ 20750

Diffuser PC
Opal 70%
☐ 20700

Diffuser PC
Black 50%
☐ 20772



Joint 180°
Metallic
☐ 20520

Joint 90°
Metallic
☐ 20510

Joint 90°
Metallic
☐ 20540

Joint 120°
Metallic
☐ 20530

Box 38 accessories



End Cap
☐ 38621
☒ 38622
☐ 38623



Spring Clip
Metallic
☐ 20710

Box 35 accessories



End Cap
☐ 35621
☒ 35622
☐ 35623



Clip
Metallic
☐ 35330



Suspension Kit
Metallic
☐ 20720 (2m)



Base 455x47x28mm

☐ 35331	☒ 35332	30W/24VDC on/off
☐ 35361	☒ 35362	60W/24VDC on/off
☐ 35311	☒ 35312	100W/24VDC on/off
☐ 35351	☒ 35352	150W/24VDC on/off
☐ 35731	☒ 35732	30W/24VDC dali
☐ 35761	☒ 35762	60W/24VDC dali
☐ 35711	☒ 35712	100W/24VDC dali
☐ 35751	☒ 35752	150W/24VDC dali




3 YEARS
WARRANTY

IP
20




2m
Max

Box 14




*Useful area: 10x5mm.



Box 71



*Useful area: 14x5mm.



Box 14



Box 71



Compatible led strips.



Technical Information

Max. power	15W/m	22W/m
Installation	Surface / corner	Surface / corner
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	○ 14121 ● 14122 ○ 14119 🌈 Custom RAL	□ 71121 ■ 71122 □ 71119 🌈 Custom RAL

ⓘ Consult delivery terms and conditions.

Box 14 accessories



Diffuser PC
Opal 70%
○ 14480



End Cap
○ 14631
● 14632
○ 14633



End Cap
○ 14621
● 14622
○ 14623



Clip
Metallic
● 14330

Box 71 accessories



Diffuser PC
Opal 70%
□ 71440



End Cap
□ 71631
■ 71632
□ 71633




End Cap
□ 71621
■ 71622
□ 71623






Clip
Metallic
■ 71330


Box 60



*Useful area: 12x3mm.



Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface / corner
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium
Code	☐ 60121
	☒ 60122
	☐ 60119
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC	End Cap left	End Cap right	Clip
Opal 70%	☐ 60631	☐ 60621	Metallic
☐ 60440	☒ 60632	☒ 60622	☐ 60330
	☐ 60633	☐ 60623	






Box 99



*Useful area: 8x3mm.

Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface / Pendant
Material	Aluminium 6063 / 6060
Finishes	White / Black
Code	☐ 99121 ☒ 99122 Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC	End Cap	Suspension Kit	Joint 90°	Joint 90°	Joint 180°
Opal 70%	☐ 99621	Metallic	Metallic	Metallic	Metallic
☐ 99440	☒ 99622	☐ 99721 (2m)	☐ 99510	☐ 99540	☐ 99520
		☒ 99722 (2m)	☒ 99512	☒ 99542	☒ 99522



Box 11




Box 12



*Useful area: 5x10mm.



35°




*Useful area: 5x10mm.



35°



Compatible led strips.



Technical Information

Max. power	15W/m	15W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	Aluminium	Aluminium
Code	☐ 11119 Custom RAL	☐ 12119 Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC
Opal 70%
☐ 20480

Box 11 accessories



End Cap
☐ 11633



End Cap
☐ 11623

Box 12 accessories



Diffuser PC
Opal 70%
☐ 20480



End Cap
☐ 12633





End Cap
☐ 12623



Clip
Metallic
☐ 20730




Box 13



*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Surface / flex
Material	Aluminium 6063 / 6060
Finishes	Aluminium
Code	☐ 13113

Accessories



Diffuser PC Opal 70% ☐ 13480	End Cap ☐ 13633	End Cap ☐ 13623	Clip Metallic ☐ 13330




Box 10




Box 19




70°



*Useful area: 12x17,7mm.



*Useful area: 12x17,7mm.



70°


Box 10



Box 19



Compatible led strips.




Technical Information

Max. power	25W/m	25W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	☐ 10121 ☒ 10122 ☐ 10119 ☒ Custom RAL	☐ 19121 ☒ 19122 ☐ 19119 ☒ Custom RAL

Consult delivery terms and conditions.


Common accessories



Diffuser PC Opal 70%
☐ 20490

Diffuser PC Black 50%
☒ 20502

Diffuser Continuous
☒ 20997



Joint 90° Metallic
☒ 20510

Joint 90° Metallic
☒ 20540

Joint 120° Metallic
☒ 20530

Joint 180° Metallic
☒ 20520

Box 10 accessories



End Cap
☐ 10621
☒ 10622
☐ 10623



Spring Clip Metallic
☒ 20710

Box 19 accessories



End Cap
☐ 19621
☒ 19622
☐ 19623



Clip Metallic
☒ 19330



Suspension Kit Metallic
☒ 20720 (2m)



Base 455x47x28mm

☐ 35331	☒ 35332	30W/24VDC on/off
☐ 35361	☒ 35362	60W/24VDC on/off
☐ 35311	☒ 35312	100W/24VDC on/off
☐ 35351	☒ 35352	150W/24VDC on/off
☐ 35731	☒ 35732	30W/24VDC dali
☐ 35761	☒ 35762	60W/24VDC dali
☐ 35711	☒ 35712	100W/24VDC dali
☐ 35751	☒ 35752	150W/24VDC dali



3 YEARS
WARRANTY




IP
20



2m
Max




Box 37

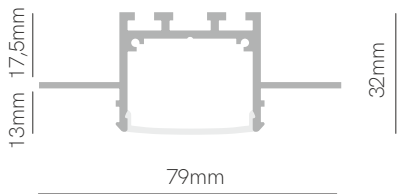

*Useful area: 23x20mm.

Compatible led strips.



Technical Information

Max. power	40W/m
Installation	Trimless
Material	Aluminium 6063 / 6060
Finishes	White
Code	☐ 37121
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 37480





End Cap
☐ 37621






Box 24



27mm x L

*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium
Code	☐ 24121
	☒ 24122
	☐ 24119
	☒ Custom RAL

Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%	End Cap	End Cap	Spring Clip
☐ 24440	☐ 24631	☐ 24621	☐ 24710
	☒ 24632	☒ 24622	
	☐ 24633	☐ 24623	








Box 69



*Useful area: 10x3mm.




Compatible led strips.



Technical Information



Max. power	15W/m
Installation	Trimless
Material	Aluminium 6063 / 6060
Finishes	Aluminium
Code	69119

Accessories







Box 68




*Useful area: 12x3mm.




Box 32



*Useful area: 12x3mm.




Compatible led strips.




Technical Information

Max. power	20W/m	20W/m
Installation	Trimless	Trimless
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black	White
Code	☐ 68121 ☒ 68122	☐ 32121

Common accessories





Box 68 accessories

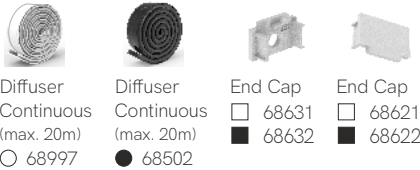


Box 32 accessories



Box 22



Compatible led strips.



Technical Information

Max. power	2x15W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	Black / Aluminium

Code	 22122
	 22119
	 Custom RAL

 Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
 20497



Diffuser
Silicone Opal 60%
(max. 60m)
 20469
 20469-15



End Cap
 22622
 22623





Clip
Metallic
 22330




Box 33



*Useful area: 12,6x6,3mm.



Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium
Code	☐ 33121
	☒ 33122
	☐ 33119
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
33440



Diffuser
Silicone Opal 60%
(max. 60m)
20469
20469-15



End Cap
33621
33622
33623








▶ VIDEO



Box 98 railing



Compatible led strips.



*Useful area: 10x2mm.



Technical Information

Max. power	30W/m
Installation	Surface / railing
Material	Aluminium 6063 / 6060
Finishes	Black / White
Code	98121 98122

Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC (2m)
Opal 70%
■ 98440



End Cap Kit
○ 98621
● 98622

x2



3D Joint
○ UNI-98-B-3D
● UNI-98-N-3D





3D Cap
○ TP-98-B-3D
● TP-98-N-3D



REF. (UNI-98-N-3D/UNI-98-B-3D) Y (TP-98-N-3D-TP-98-B-3D)

3 YEARS WARRANTY | IP 20 | 2m


Box 21



*Useful area: 12x3mm.



Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Recessed
Material	Aluminium 6063 / 6060
Finishes	White / Aluminium
Code	☐ 21121
	☐ 21119
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20497



Diffuser
Silicone Opal 60%
(max. 60m)
☐ 20469
☐ 20469-15



End Cap
Left
☐ 21631
☐ 21633



End Cap
Right
☐ 21621
☐ 21623



Box 27




17,7mm




43,5mm

115°



*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium
Code	☐ 27121
	☒ 27122
	☐ 27119
	☒ Custom RAL

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20497



Diffuser
Silicone Opal 60%
(max. 60m)
☐ 20469
☐ 20469-15



End Cap left
☐ 27631
☒ 27632
☐ 27633




End Cap right
☐ 27621
☒ 27622
☐ 27623






Box 65

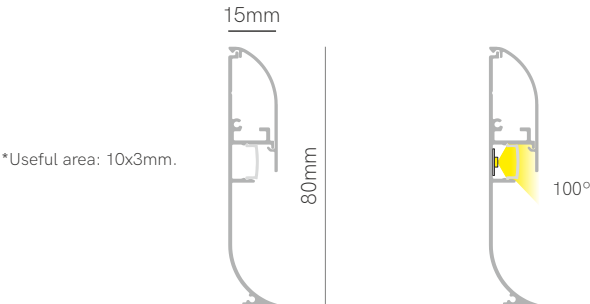

Compatible led strips.



Technical Information

Max. power	12W/m
Installation	Surface / skirting
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium
Code	☐ 65121
	☒ 65122
	☐ 65119
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.


Accessories

Diffuser PC Opal 70% ☐ 65440	End Cap Kit ☐ 65621 ☒ 65622 ☐ 65623	90° outside connector ☐ 65221 ☒ 65222 ☐ 65223	90° inside connector ☐ 65331 ☒ 65332 ☐ 65333	Joint 180° Metallic ☐ 65550







Box 67



*Useful area: 12x3mm.



Compatible led strips.



Technical Information

Max. power	12W/m
Installation	Surface / stairs
Material	Aluminium 6063 / 6060
Finishes	Black
Code	■ 67122

Accessories



Diffuser PC
Opal 70%
■ 67440



End Cap
Left
■ 67632-L





End Cap
Right
■ 67632-R



PVC anti-skid cover
■ 67452



Box 39



Opal 90°
Transparent 105°




Optic 30°

*Useful area: 12x8mm.



Compatible led strips.



Technical Information

Max. power	25W/m
Installation	Surface / Pendant
Material	Aluminium 6063 / 6060
Finishes	Black
Code	● 39122 🚫🌈 Custom RAL

📄 Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
○ 39440



Diffuser PC
Transp. 90%
○ 39450



Diffuser PC
Optic 30%
■ 39430



End Cap
● 39622



Clip
Plastic
○ 25530




Suspension Kit
○ 25887 (2m)



Suspension Kit
○ 39720



Base 455x47x28mm
□ 35331 (30W/24V) ■ 35332 (30W/24V)
□ 35361 (60W/24V) ■ 35362 (60W/24V)
□ 35311 (100W/24V) ■ 35312 (100W/24V)




Box 28



*Useful area: 12x5mm.

Compatible led strips.



Technical Information

Max. power	40W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	Aluminium
Code	● 28119

Accessories



Diffuser PC
Optic 30%
● 28430



End Cap
● 28633



End Cap
● 28623




Clip
Metallic
■ 28330






Box 29



*Useful area: 12x18mm.

Compatible led strips.



Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium 6063 / 6060
Finishes	Aluminium
Code	☐ 29119

Accessories






Diffuser PC
Opal 70%
☐ 29480



End Cap
☐ 29623




Box 73



*Useful area: 12x7mm.



Compatible led strips.



Technical Information

Max. power	22W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium
Code	☐ 73121
	☒ 73122
	☐ 73119
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories




Diffuser PC
Opal 70%
☐ 73440




End Cap
☐ 73621
☒ 73622
☐ 73623



End Cap
☐ 73631
☒ 73632
☐ 73633



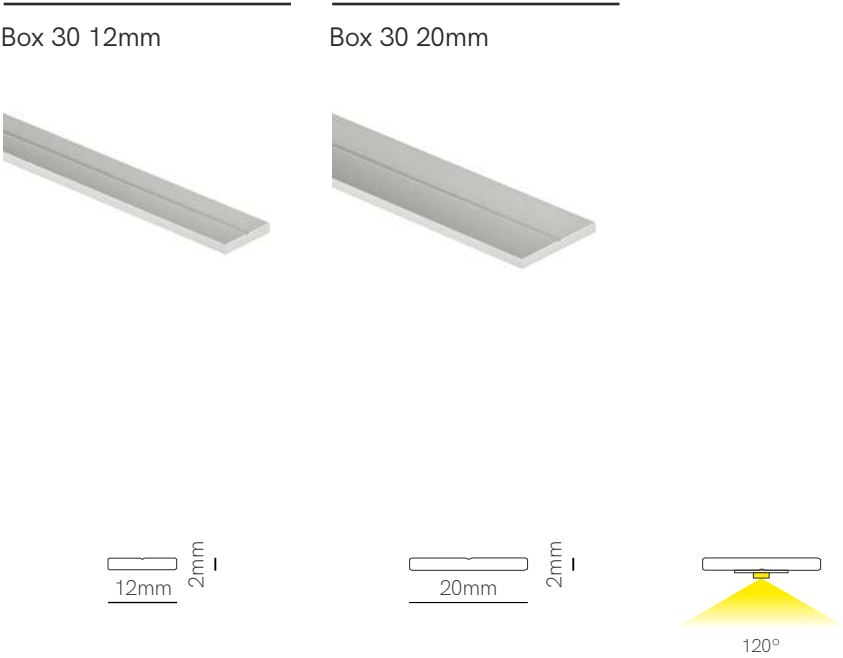

Compatible led strips.

 +  






Technical Information

Max. power	20W/m	40W/m
Installation	Surface	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	Aluminium	Aluminium
Code	 30129	 30209

 Consult delivery terms and conditions.





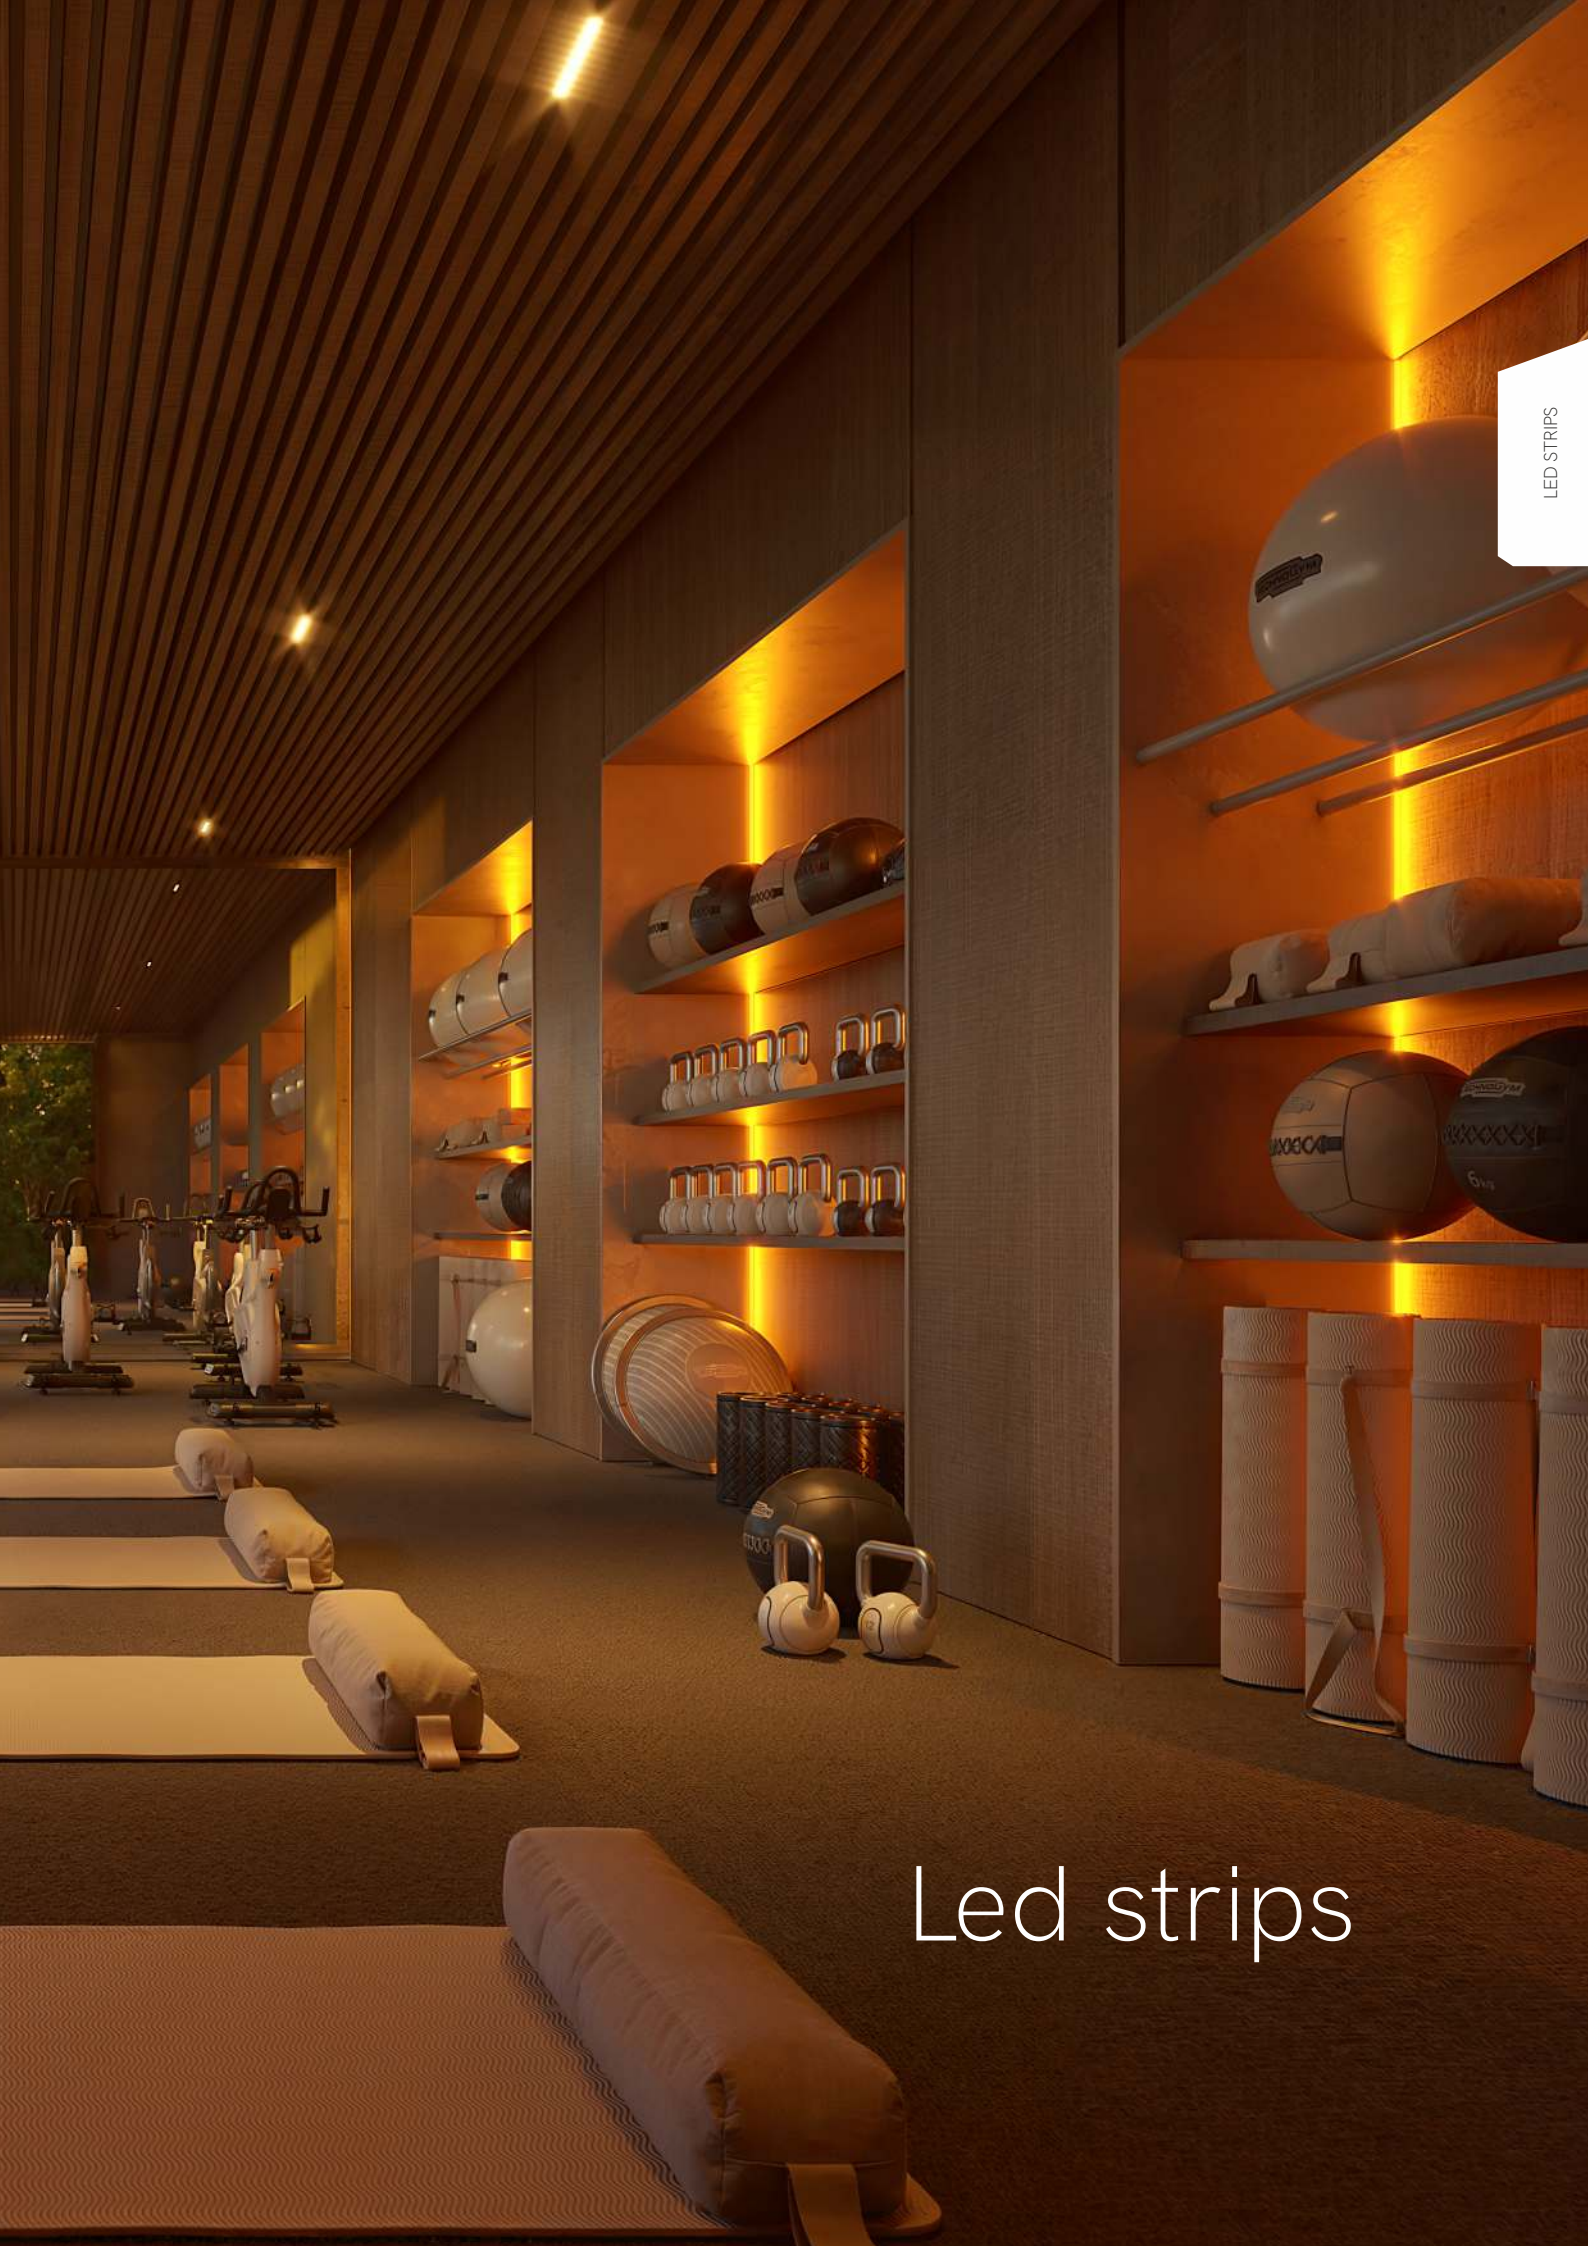

LED STRIPS

Led strips


	Model	Page	Power	Width	CCT
NEW	FINE 20	242	6W/m	8mm	  
NEW	FINE 26	243	6W/m	5mm	  
	FINE 25	305	20W/m	Ø25mm	     
	FINE 30	257	30W/m	20mm	  
	FINE 31	244	12W/m	10mm	   
	FINE 32 N	261	15W/m	12mm	   
	FINE 34	307	5W/m	6mm	  
	FINE 36	274	12W/m	10mm	
	FINE 37	265	14,4W/m	10mm	  
	FINE 41	249	14,4W/m	10mm	   
	FINE 42	277	19,2W/m	10mm	
	FINE 43	282	19,2W/m	12mm	
	FINE 44	271	14,4W/m	10mm	   
	FINE 45	289	10W/m	10mm	  
	FINE 46	281	14,4W/m	10mm	
	FINE 47	288	14,4W/m	12mm	
	FINE 48	235	5W/m	10mm	   
	FINE 49	263	10W/m	4mm	   
	FINE 50	283	9,6W/m	5mm	
	FINE 51	259	9,6W/m	10mm	   
	FINE 52	247	22W/m	10mm	   
	FINE 54	279	14W/m	10mm	
	FINE 55	264	24W/m	20mm	  
	FINE 56	256	22W/m	15mm	   
	FINE 60	285	8W/m	12mm	
	FINE 61	252	15W/m	10mm	   
	FINE 63	273	19W/m	10mm	
	FINE 64	234	2,5W/m	10mm	  
	FINE 66 N	286	20W/m	12mm	

Lumens	CRI	Density	Voltage	IP20	IP54	IP65	IP67
72-84 Lm/W				-			-
98-106 Lm/W					-	-	-
41-73 Lm/W				-	-	-	
150-160 Lm/W					-	-	-
85-100 Lm/W					-	-	
100-110 Lm/W				-	-		-
28-32 Lm/W				-	-	-	
100 Lm/W					-	-	-
126-140 Lm/W					-	-	-
92-102 Lm/W					-		-
90 Lm/W					-		-
90 Lm/W	-				-	-	-
85-95 Lm/W					-	-	-
15-91 Lm/W	-				-	-	
38-41 Lm/W	-				-		-
18-60 Lm/W	-				-	-	-
110-135 Lm/W					-	-	-
71-77 Lm/W					-	-	-
58 Lm/W	-				-	-	-
100 Lm/W					-	-	
97-112 Lm/W	-				-	-	
45-50 Lm/W	-				-	-	
80-86 Lm/W					-	-	-
130-170 Lm/W					-	-	-
81 Lm/W	-				-	-	-
110-125 Lm/W					-		-
89-95 Lm/W					-	-	
110-120 Lm/W					-	-	-
167 Lm/W	-				-	-	

	Model	Page	Power	Width	CCT
	FINE 68	250	19,2W/m	10mm	  
	FINE 69	241	9,6W/m	10mm	    
	FINE 70	311	5W/m	12,8mm	   
	FINE 71	287	21W/m	12mm	
	FINE 72	313	10W/m	16mm	   
NEW	FINE 73	316	14,4W/m	19mm	 
	FINE 74	315	10W/m	24mm	   
	FINE 75	260	7W/m	12mm	  
	FINE 76	253	15W/m	12mm	 
	FINE 77	309	8W/m	19mm	   
	FINE 79	251	10W/m	8mm	  
NEW	FINE 81	275	22,5W/m	10mm	 
	FINE 82	245	15W/m	8mm	  
	FINE 84	239	4,8W/m	10mm	   
NEW	FINE 86	267	10W/m	10mm	  
	FINE 88	262	12W/m	5mm	   
NEW	FINE 90	268	10W/m	8mm	  
NEW	FINE 91	269	24W/m	10mm	
	FINE 92	246	10W/m	6mm	  
	FINE 96	255	18W/m	18,5mm	  
	FINE 97	237	10W/m	10mm	
	FINE DMX-4	299	12W/m	12mm	
	FINE DMX-5	301	17W/m	12mm	
	FINE RUNNING	291	12W/m	10mm	 
	FINE SPI-2	293	14W/m	10mm	
	FINE SPI-3	295	11W/m	10mm	
	FINE SPI-4	296	20W/m	Ø25mm	
NEW	FINE SPI-5	297	12W/m	8mm	

Lumens	CRI	Density	Voltage	IP20	IP65	IP67
130-140 Lm/W	≥90 CRI	200 LED/m	24 VDC		-	-
87-102 Lm/W		140 LED/m	24 VDC			-
15-37 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
29-117 Lm/W	-	96 LED/m	24 VDC		-	
26-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
48-51 Lm/W	≥80 CRI	140 LED/m	24 VDC	-	-	
22-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
100-110 Lm/W	≥80 CRI	120 LED/m	220/240 VAC	-		-
120-128 Lm/W	≥90 CRI	126 LED/m	24 VDC		-	-
26-55 Lm/W	≥90 CRI	120 LED/m	24 VDC	-	-	
170-180 Lm/W	≥80 CRI	160 LED/m	24 VDC			-
100 Lm/W	≥80 CRI	216 LED/m	24 VDC		-	-
65-70 Lm/W	≥90 CRI	480 LED/m	24 VDC		-	-
95-102 Lm/W	≥90 CRI	70 LED/m	24 VDC			-
47-95 Lm/W	≥90 CRI	480 LED/m	24 VDC	-	-	 IP68
90-110 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
95-110 Lm/W	≥80 CRI	60 LED/m	24 VDC		-	-
95 Lm/W	≥90 CRI	216 LED/m	24 VDC		-	-
80-90 Lm/W	≥97 CRI	320 LED/m	24 VDC		-	-
67,5-120 Lm/W	≥90 CRI	48 LED/m	24 VDC	-	-	
140 Lm/W	-	160 LED/m	24 VDC		-	-
42 Lm/W	-	70 LED/m	24 VDC	-	-	
50 Lm/W	-	70 LED/m	24 VDC		-	
79-87 Lm/W	≥90 CRI	360 LED/m	24 VDC		-	-
37 Lm/W	-	84 LED/m	24 VDC		-	-
51 Lm/W	-	60 LED/m	24 VDC		-	-
12,5 Lm/W	-	168 LED/m	24 VDC	-	-	
48 Lm/W	-	60 LED/m	24 VDC		-	-

Fine 64

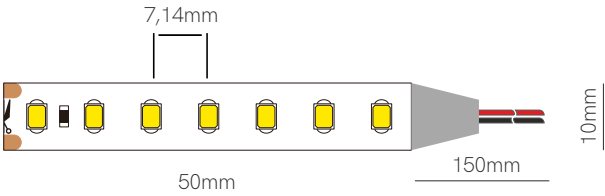

1,5mm | IP20



Compatible profiles.

Technical Information

V / A / W 24V / 0,1A / 2,5W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	64270	110 lm/w	275 lm/m	2700K	IP20
	64300	115 lm/w	287 lm/m	3000K	IP20
	64400	120 lm/w	300 lm/m	4000K	IP20

Accessories





Joint
13,8x11,55x3,9mm
 20220



Joint
13,55x11,67x4,7mm
 20120

*Available in reel of 10 meters.
Accessories pages 317-319.

Fine 48

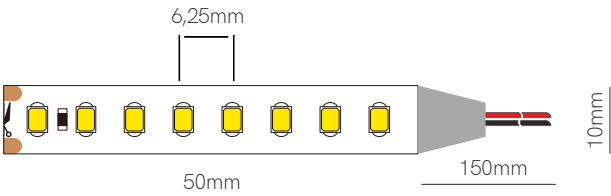

Compatible profiles.

 +  ✓



Technical Information

V / A / W	24V / 0,2A / 5W/m
-----------	-------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	48220	110 lm/w	550 lm/m	2200K	IP20
	48270	120 lm/w	600 lm/m	2700K	IP20
	48300	130 lm/w	650 lm/m	3000K	IP20
	48400	135 lm/w	675 lm/m	4000K	IP20
	48225	110 lm/w	550 lm/m	2200K	IP65
	48275	120 lm/w	600 lm/m	2700K	IP65
	48305	130 lm/w	650 lm/m	3000K	IP65
	48405	135 lm/w	675 lm/m	4000K	IP65

Accessories


End Cap
○ 20635


End Cap
○ 20625


Joint
13,8x11,55x3,9mm
■ 20220


Joint
13,55x11,67x4,7mm
■ 20120


Joint
24,3x14,6x7,7mm
■ 20225


Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 10 meters. Accessories pages 317-319.

CE RoHS 

5 YEARS WARRANTY

5 W/m

160 LED/m

CRI ≥90



24 VDC




50mm 

LM-80


2835



Fine 97

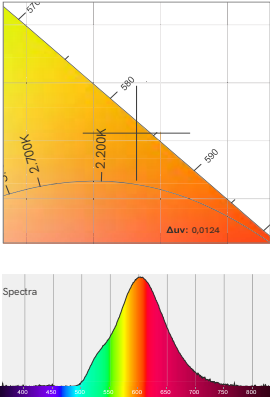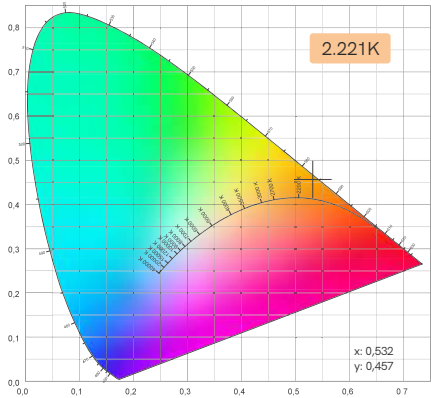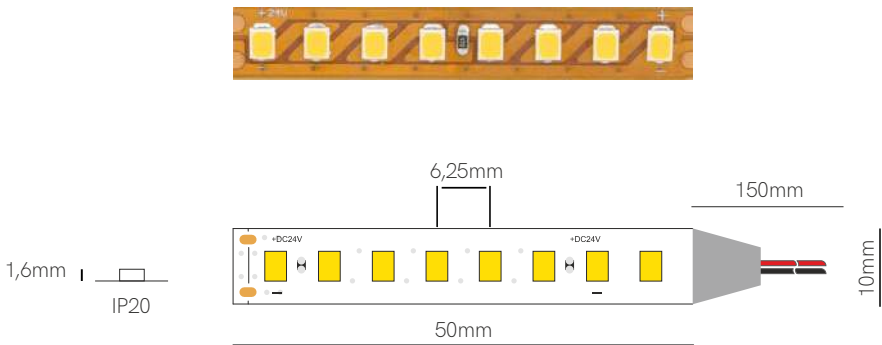

Compatible profiles.

 +  ✓





Technical Information

V / A / W 24V / 0,4A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	97220	140 lm/w	1.400 lm/m	2200K	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters. Accessories pages 317-319.



5 YEARS
WARRANTY

10
W/m

160
LED/m



24
VDC

50mm



2835



Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.

Fine 84



Compatible profiles.

 +  ✓





Technical Information

V / A / W 24V / 0,2A / 4,8W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	84270	95 lm/w	456 lm/m	2700K	IP20
	84300	98 lm/w	470 lm/m	3000K	IP20
	84400	100 lm/w	480 lm/m	4000K	IP20
	84600	102 lm/w	489 lm/m	6000K	IP20
	84275	90 lm/w	432 lm/m	2700K	IP65
	84305	92 lm/w	441 lm/m	3000K	IP65
	84405	95 lm/w	456 lm/m	4000K	IP65
	84605	97 lm/w	465 lm/m	6000K	IP65

Accessories


End Cap
○ 20635


End Cap
○ 20625


Joint
24,3x14,6x7,7mm
■ 20225


Joint
24,3x14,6x7,7mm
■ 20125


Joint
15,4x11,5x5,7mm
■ 20991


Joint
21,6x11,5x5,7mm
■ 20999

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



5 YEARS WARRANTY

4,8 W/m

70 LED/m

CRI ≥90

III

24 VDC

100mm



LM-80

 2835




Building contractor: Construplan Construcciones y planificación S.L.U. Photography: David Rodríguez.



Architecture: Room C Studio, Gran Canaria (Spain).

Fine 69

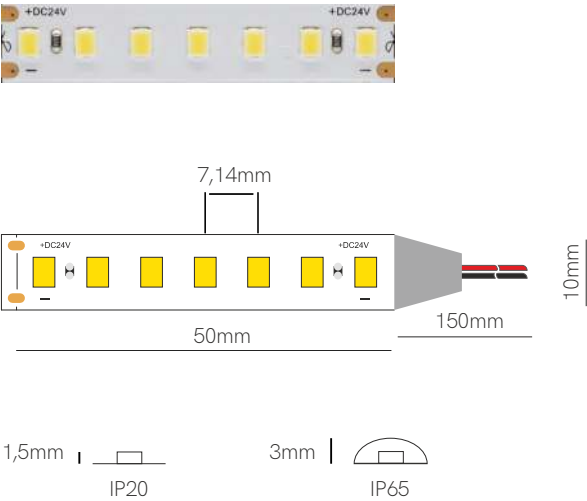

Compatible profiles.

 +  



Technical Information

V / A / W 24V / 0,4A / 9,6W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	69220	87 lm/w	835 lm/m	2200K	IP20
	69270	95 lm/w	912 lm/m	2700K	IP20
	69300	98 lm/w	940 lm/m	3000K	IP20
	69400	100 lm/w	960 lm/m	4000K	IP20
	69600	102 lm/w	979 lm/m	6000K	IP20
	69225	87 lm/w	835 lm/m	2200K	IP65
	69275	90 lm/w	864 lm/m	2700K	IP65
	69305	92 lm/w	883 lm/m	3000K	IP65
	69405	95 lm/w	912 lm/m	4000K	IP65
	69605	97 lm/w	931 lm/m	6000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

























New

Fine 20

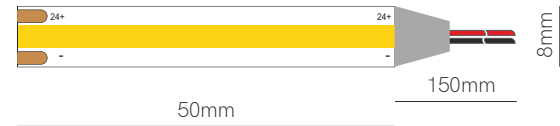

Compatible profiles.



Technical Information

V / A / W	24V / 0,25A / 6W/m
-----------	--------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	20274	72 lm/w	432 lm/m	2700K	IP54
	20304	78 lm/w	468 lm/m	3000K	IP54
	20404	84 lm/w	504 lm/m	4000K	IP54

Accessories

End cap
20825

End cap
20865

Connector Cable
20818

Joint
20828

L Joint
20838

*Available in reel of 10 meters.
Accessories pages 317-319.

5 YEARS WARRANTY

6 W/m



320 LED/m

24 VDC

50mm

New

Fine 26



Compatible profiles.

 +  ✓



Technical Information

V / A / W

24V / 0,25A / 6W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	26270	98 lm/w	588 lm/m	2700K	IP20
	26300	101 lm/w	606 lm/m	3000K	IP20
	26400	106 lm/w	636 lm/m	4000K	IP20

Accessories




Connector Cable
20518



Joint
20528

*Available in reel of 5 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

6 W/m

400 LED/m

CRI ≥90



24 VDC


20mm



LM-80



Fine 31

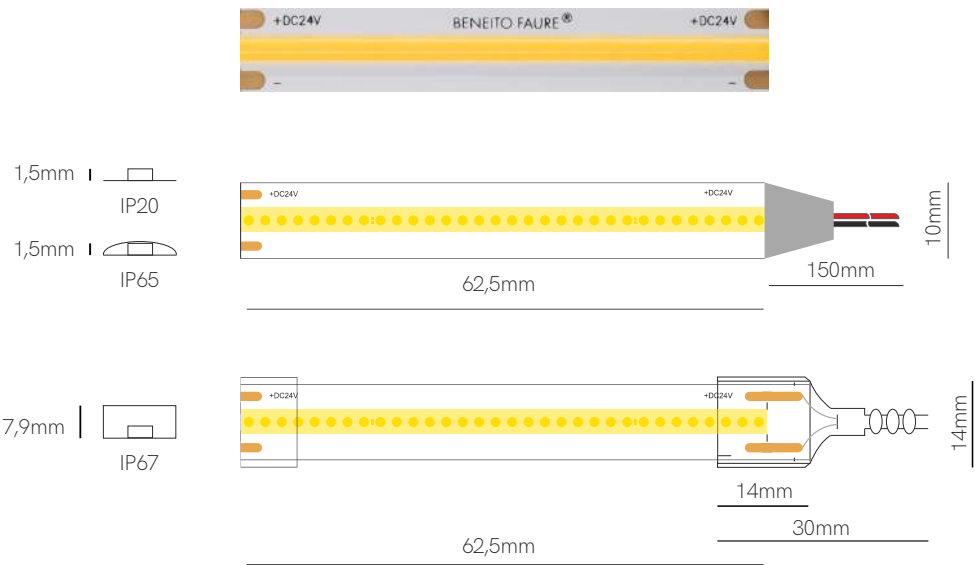

Compatible profiles.

Technical Information


V / A / W 24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	31220	85 lm/w	1.020 lm/m	2200K	IP20
	31270	95 lm/w	1.140 lm/m	2700K	IP20
	31300	98 lm/w	1.176 lm/m	3000K	IP20
	31400	100 lm/w	1.200 lm/m	4000K	IP20
	31225 New	85 lm/w	1.020 lm/m	2200K	IP65
	31275 New	95 lm/w	1.140 lm/m	2700K	IP65
	31305 New	98 lm/w	1.176 lm/m	3000K	IP65
	31405 New	100 lm/w	1.200 lm/m	4000K	IP65
	31227	80 lm/w	960 lm/m	2200K	IP67
	31277	90 lm/w	1.080 lm/m	2700K	IP67
	31307	93 lm/w	1.116 lm/m	3000K	IP67
	31407	95 lm/w	1.140 lm/m	4000K	IP67


Accessories



*Available in reel of 5 meters.
Accessories pages 317-319.



Fine 82

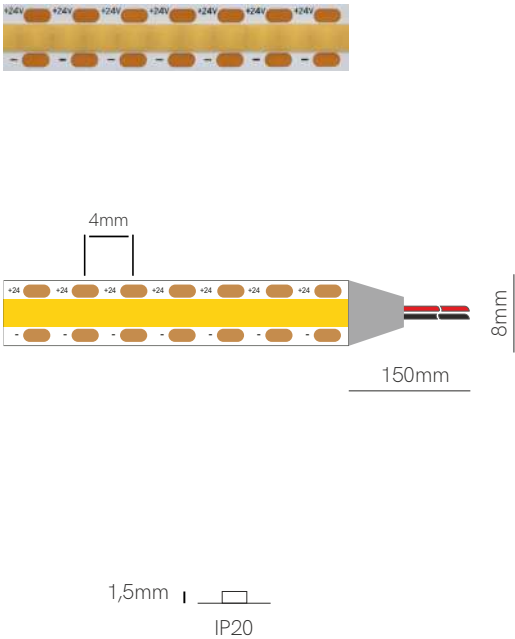

Compatible profiles.

 +  ✓



Technical Information

V / A / W	24V / 0,63A / 10W/m
-----------	---------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	82270	65 lm/w	650 lm/m	2700K	IP20
	82300	65 lm/w	650 lm/m	3000K	IP20
	82400	70 lm/w	700 lm/m	4000K	IP20

Accessories



Connector Cable

20818



Joint

20828



L Joint

20838



L Joint

20T90

*Available in reel of 10 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

10 W/m

480 LED/m

CRI ≥90

III




24 VDC

Free cut

LM-80

COB

Fine 92



Technical Information


V / A / W	24V / 0,42A / 10W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	92270	80 lm/w	800 lm/m	2700K	IP20
	92300	85 lm/w	850 lm/m	3000K	IP20
	92400	90 lm/w	900 lm/m	4000K	IP20

*Available in reel of 10 meters.
Accessories pages 317-319.



Fine 52

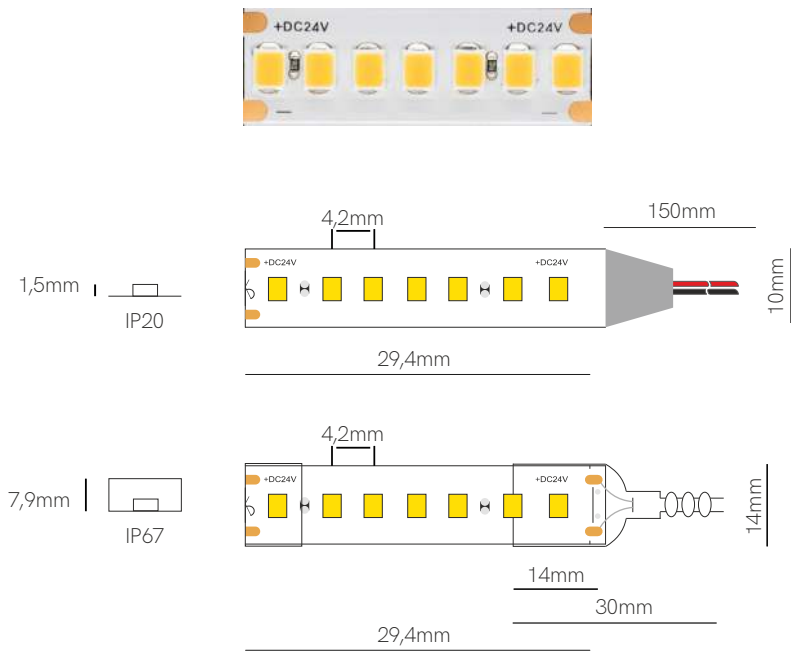

Compatible profiles.

 +  ✓



Technical Information

V / A / W	24V / 0,91A / 22W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	52270	97 lm/w	2.134 lm/m	2700K	IP20
	52300	103 lm/w	2.266 lm/m	3000K	IP20
	52400	108 lm/w	2.376 lm/m	4000K	IP20
	52600	112 lm/w	2.464 lm/m	6000K	IP20
	52277	97 lm/w	2.134 lm/m	2700K	IP67
	52307	103 lm/w	2.266 lm/m	3000K	IP67
	52407	108 lm/w	2.376 lm/m	4000K	IP67
	52607	112 lm/w	2.464 lm/m	6000K	IP67

Accessories



End Cap
32635



End Cap
32625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

22 W/m

238 LED/m





24 VDC

29,4mm










Fine 41

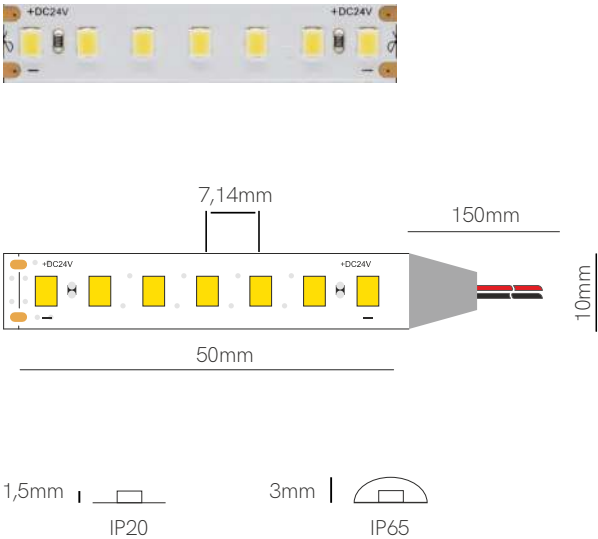

Compatible profiles.

 +  ✓



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	41270	95 lm/w	1.368 lm/m	2700K	IP20
	41300	98 lm/w	1.411 lm/m	3000K	IP20
	41400	100 lm/w	1.440 lm/m	4000K	IP20
	41600	102 lm/w	1.468 lm/m	6000K	IP20
	41275	90 lm/w	1.296 lm/m	2700K	IP65
	41305	92 lm/w	1.324 lm/m	3000K	IP65
	41405	95 lm/w	1.368 lm/m	4000K	IP65
	41605	97 lm/w	1.396 lm/m	6000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.
























Fine 68

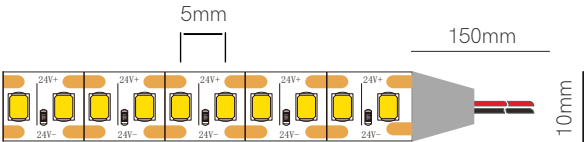

1,4mm |  IP20



Compatible profiles.  +  ✓

Technical Information

V / A / W 24V / 0,8A / 19,2W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	68270	130 lm/w	2.496 lm/m	2700K	IP20
	68300	135 lm/w	2.592 lm/m	3000K	IP20
	68400	140 lm/w	2.688 lm/m	4000K	IP20

Accessories




Joint
13,8x11,55x3,9mm
 20220



Joint
13,55x11,67x4,7mm
 20120

*Available in reel of 5 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

19,2 W/m

200 LED/m

 CRI ≥90

 LM-80


24 VDC

Free cut 

 LM-80

 2835

Fine 79

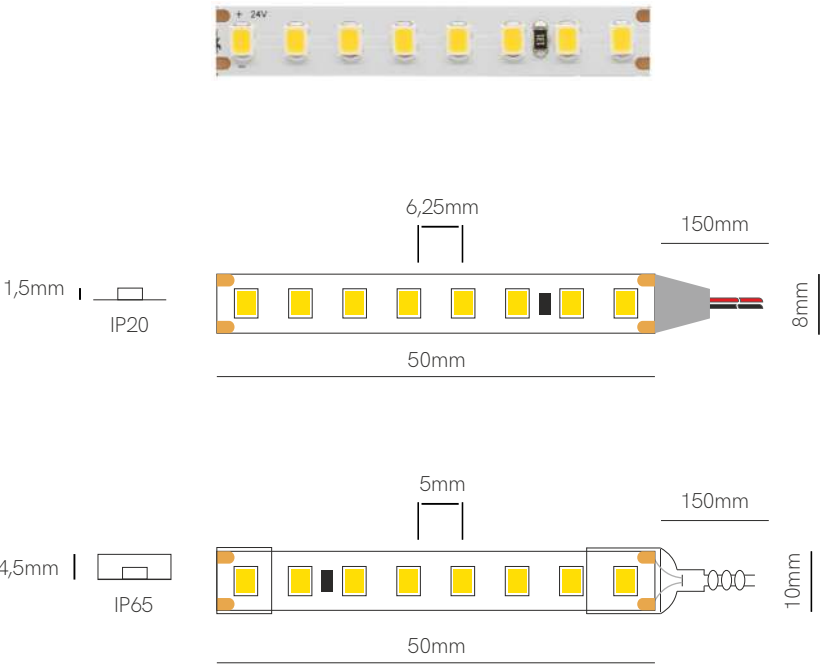

Compatible profiles.

 +  ✓



Technical Information

V / A / W	24V / 0,42A / 10W/m
-----------	---------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	79270	170 lm/w	1.700 lm/m	2700K	IP20
	79300	175 lm/w	1.750 lm/m	3000K	IP20
	79400	180 lm/w	1.800 lm/m	4000K	IP20
	79275	170 lm/w	1.700 lm/m	2700K	IP65
	79305	175 lm/w	1.750 lm/m	3000K	IP65
	79405	180 lm/w	1.800 lm/m	4000K	IP65

Accessories


End cap
20825


End cap
20865



Connector Cable
20818


Joint
20828


L Joint
20838


L Joint
20T90

*Available in reel of 5 meters. Accessories pages 317-319.
























Fine 61

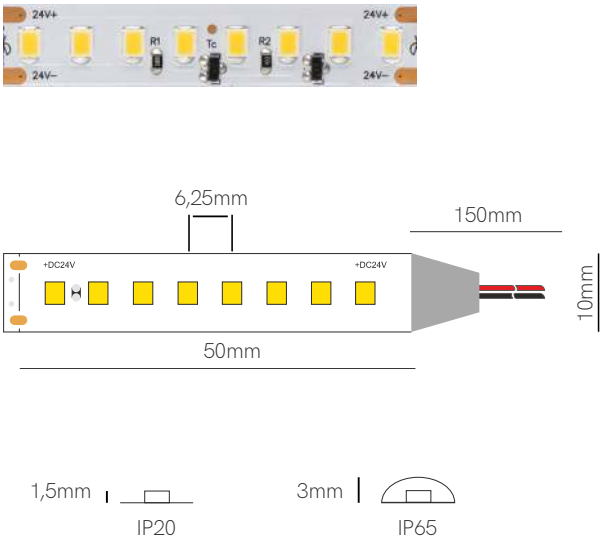

Compatible profiles.

Technical Information

V / A / W 24V / 0,62A / 15W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	61270	110 lm/w	1.650 lm/m	2700K	IP20
	61300	115 lm/w	1.725 lm/m	3000K	IP20
	61400	120 lm/w	1.800 lm/m	4000K	IP20
	61600	125 lm/w	1.875 lm/m	6000K	IP20
	61275	110 lm/w	1.650 lm/m	2700K	IP65
	61305	115 lm/w	1.725 lm/m	3000K	IP65
	61405	120 lm/w	1.800 lm/m	4000K	IP65
	61605	125 lm/w	1.875 lm/m	6000K	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625

Joint
13,8x11,55x3,9mm
■ 20220

Joint
13,55x11,67x4,7mm
■ 20120

Joint
24,3x14,6x7,7mm
■ 20225

Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

5 YEARS WARRANTY





15 W/m

160 LED/m


24 VDC

50mm

Fine 76

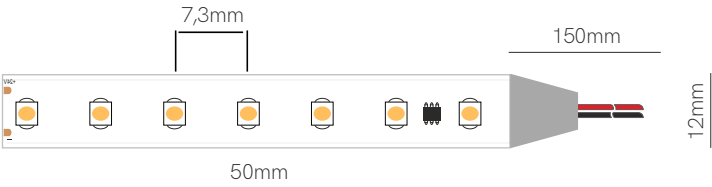

Compatible profiles.







Technical Information

V / A / W

24V / 0,62A / 15W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	76300	120 lm/w	1.800 lm/m	3000K	IP20
	76400	128 lm/w	1.920 lm/m	4000K	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

15 W/m

126 LED/m

CRI ≥80



24 VDC

50mm











Fine 96

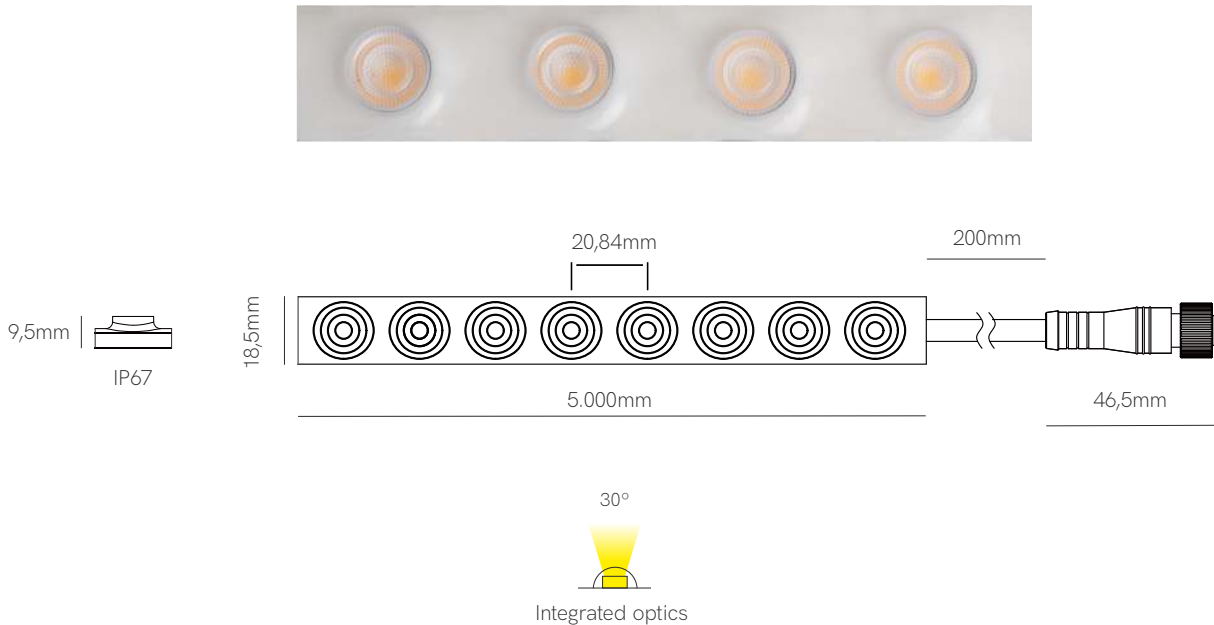

Compatible profiles.



Technical Information

V / A / W (3.000K / 4.000K)	24V / 0,75A / 20W/m
V / A / W (RGB-W)	24V / 0,33A / 20W/m
Red	44 lm/w 5W
Green	89 lm/w 5W
Blue	25 lm/w 5W
White	77 lm/w 5W

	Code	Lumens/w	Lumens/m	CCT	IP
Code	96307	71 lm/w	1.915 lm/m	3000K	IP67
	96407	74 lm/w	2.167 lm/m	4000K	IP67
	96477	55 lm/w	1.200 lm/m	RGB-W 3.000K	IP67

Accessories



End Cap
96633



End Cap
96623



Clip
96119



Clip
96380



Clip
96330



Clip
96350



ADH
96111



Extension cable
96946-M2
96946-M4
96946-H2
96946-H4



Extension cable
96920-2
96920-4

*Available in reel of 5 meters. Accessories pages 317-319.























Fine 56

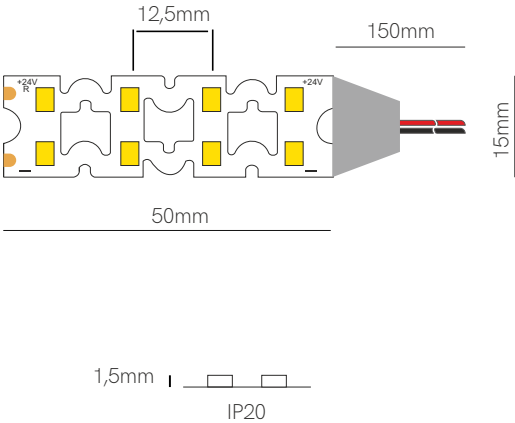

Compatible profiles.

Technical Information

V / A / W 24V / 0,91A / 22W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	56270	155 lm/w	3.410 lm/m	2700K	IP20
	56300	160 lm/w	3.520 lm/m	3000K	IP20
	56400	170 lm/w	3.740 lm/m	4000K	IP20
	56360	130 lm/w	2.860 lm/m	2.700-6.000K	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.

5 YEARS WARRANTY

22 W/m



160 LED/m

CRI ≥80

24 VDC

50 mm

Fine 30

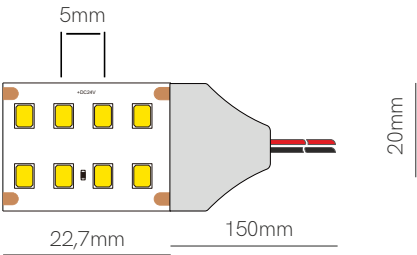

Compatible profiles.

 +  





Technical Information

V / A / W	24V / 1,25A / 30W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	30270	152 lm/w	4.560 lm/m	2700K	IP20
	30300	161 lm/w	4.826 lm/m	3000K	IP20
	30400	169 lm/w	5.069 lm/m	4000K	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

30 W/m

352 LED/m

 CRI ≥90



24 VDC

22,7mm




 LM-80

 2835



Fine 51

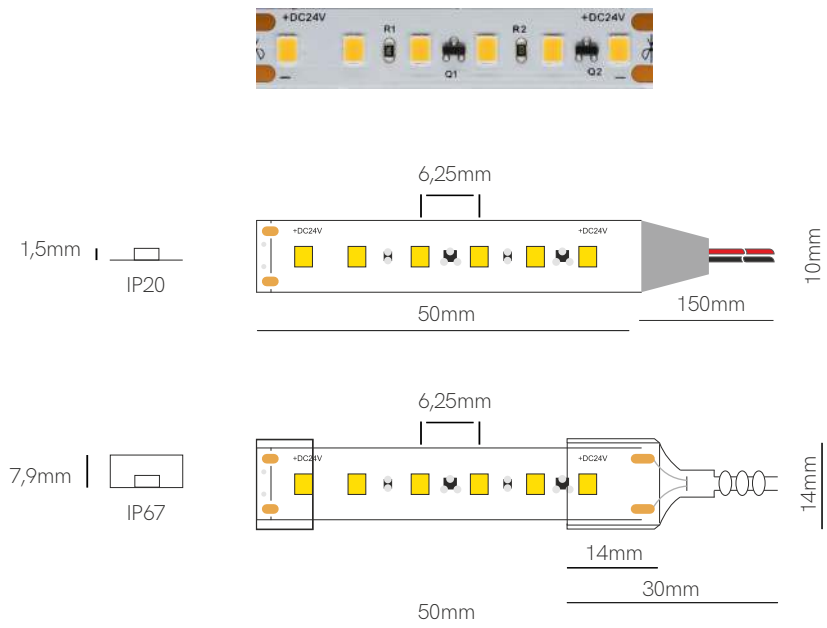

Compatible profiles.

 +  ✓



Technical Information

V / A / W 24V / 0,4A / 9,6W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	51270	100 lm/w	960 lm/m	2700K	IP20
	51300	100 lm/w	960 lm/m	3000K	IP20
	51400	100 lm/w	960 lm/m	4000K	IP20
	51600	100 lm/w	960 lm/m	6000K	IP20
	51277	100 lm/w	960 lm/m	2700K	IP67
	51307	100 lm/w	960 lm/m	3000K	IP67
	51407	100 lm/w	960 lm/m	4000K	IP67
	51607	100 lm/w	960 lm/m	6000K	IP67

Accessories



End Cap
32635



End Cap
32625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 20 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

9,6 W/m

120 LED/m





24 VDC

ULTRALONG


50mm







Fine 75

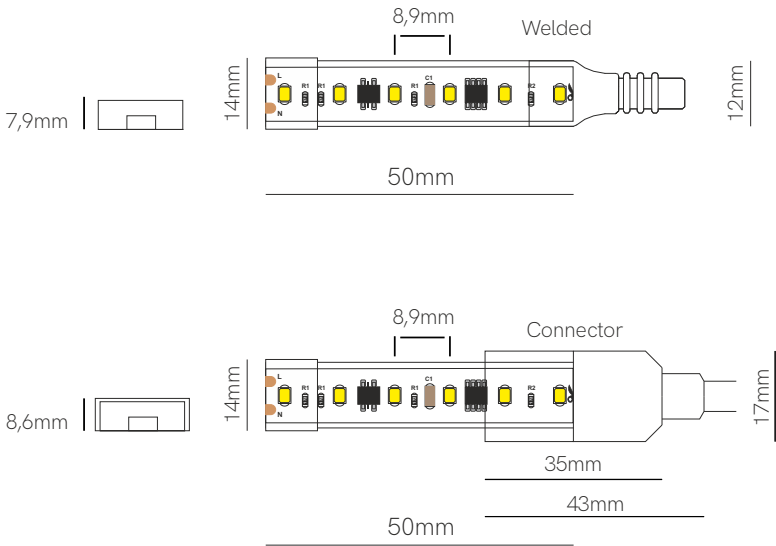

Compatible profiles.

Technical Information

V / A / W	220V / 0,03A / 7W/m
-----------	---------------------

Code	Code	Lumen/w	Lumen/m	CCT	IP
	75275	100 lm/w	700 lm/m	2700K	IP65
	75305	105 lm/w	735 lm/m	3000K	IP65
	75405	110 lm/w	770 lm/m	4000K	IP65

Accessories

End Cap
32635

End Cap
32625

Connector kit
32699

Join 180°
32899

Join 90°
32499

Clip
32900

Joint
32299

*Available in reel of 50 meters. Accessories pages 317-319.

3 YEARS WARRANTY

7 W/m

120 LED/m

CRI ≥80


220/240 VAC

50mm

TRIAC DIMM 30-100%

2835

Fine 32 N

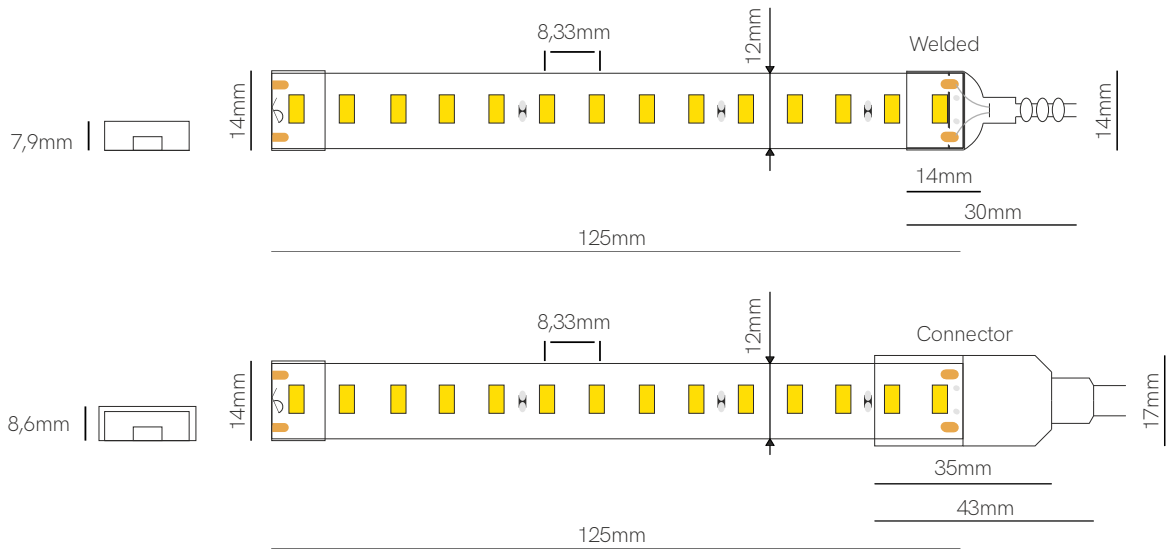

Compatible profiles.

 +  



Technical Information

V / A / W 220V / 0,068A / 15W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	32275-N	100 lm/w	1.500 lm/m	2700K	IP65
	32305-N	105 lm/w	1.575 lm/m	3000K	IP65
	32405-N	110 lm/w	1.650 lm/m	4000K	IP65
	32605-N	110 lm/w	1.650 lm/m	6000K	IP65

Accessories


End Cap
32635


End Cap
32625


Connector kit
32699


Join 180°
32899


Join 90°
32499


Clip
32900


Joint
32299

*Available in reel of 5 or 50 meters. Accessories pages 317-319.



3 YEARS WARRANTY

15 W/m

112 LED/m



CRI ≥80

220/240 VAC

125mm





TRIAC DIMM 30-100%





Fine 88

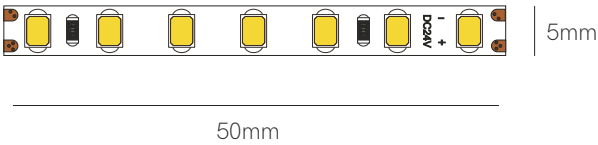

Technical Information

V / A / W

24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	88220	90 lm/w	1.080 lm/m	2200K	IP20
	88270	100 lm/w	1.200 lm/m	2700K	IP20
	88300	105 lm/w	1.260 lm/m	3000K	IP20
	88400	110 lm/w	1.320 lm/m	4000K	IP20

Accessories



Connector Cable
20518



Joint
20528

*Available in reel of 5 meters.
Accessories pages 317-319.

5 YEARS WARRANTY

12 W/m

140 LED/m

CRI ≥ 90



24 VDC

50mm

LM-80

2835

Fine 49

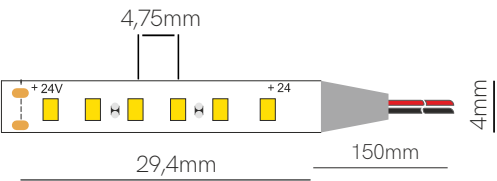

Compatible profiles.

 +  





Technical Information

V / A / W	24V / 0,4A / 10W/m
-----------	--------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	49270	71 lm/w	710 lm/m	2700K	IP20
	49300	74 lm/w	740 lm/m	3000K	IP20
	49400	77 lm/w	770 lm/m	4000K	IP20
	49600	74 lm/w	740 lm/m	6000K	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.

























Fine 55

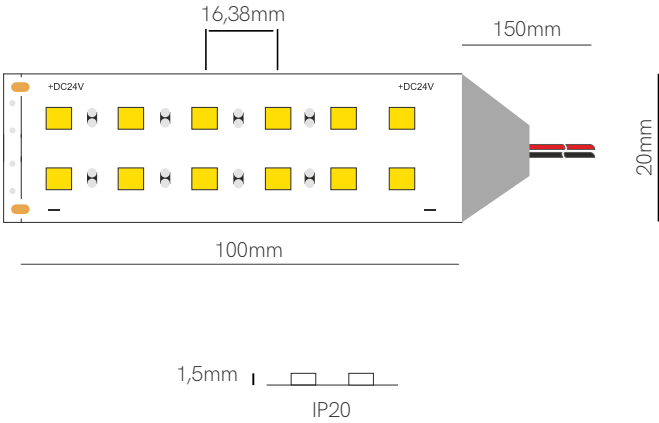

Compatible profiles.

Technical Information


V / A / W

24V / 1A / 24W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	55270	84 lm/w	2.016 lm/m	2700K	IP20
	55300	89 lm/w	2.136 lm/m	3000K	IP20
	55400	94 lm/w	2.256 lm/m	4000K	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.

Fine 37

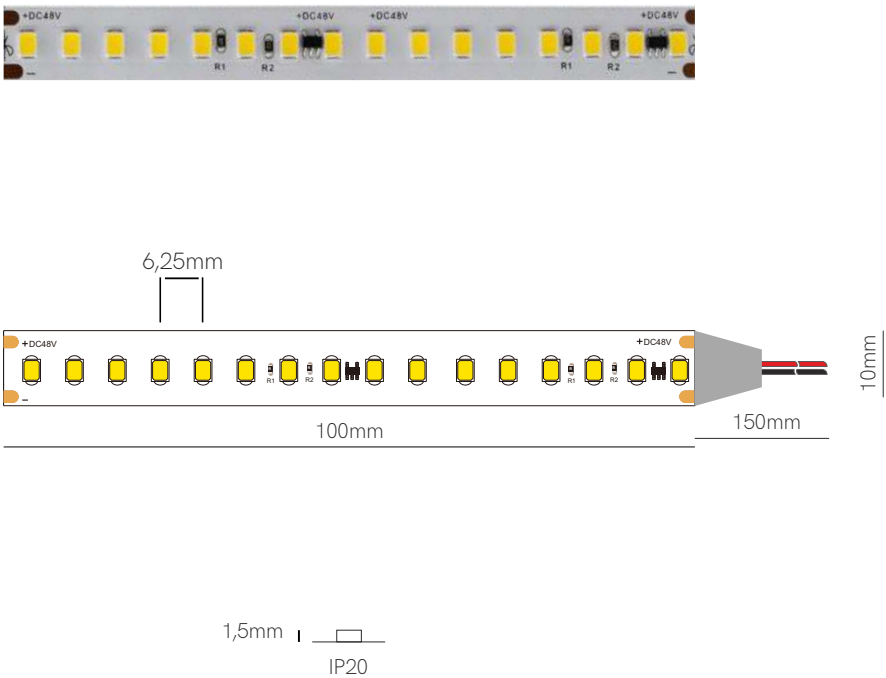

Compatible profiles.

 +  ✓



Technical Information

V / A / W 48V / 0,3A / 14,4W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	37270	126 lm/w	1.815 lm/m	2700K	IP20
	37300	135 lm/w	1.944 lm/m	3000K	IP20
	37400	140 lm/w	2.016 lm/m	4000K	IP20

Power supply 48V (page 366).

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 25 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

14,4 W/m

160 LED/m

 CRI ≥90



48 VDC

100mm




 LM-80

 2835



New

Fine 86

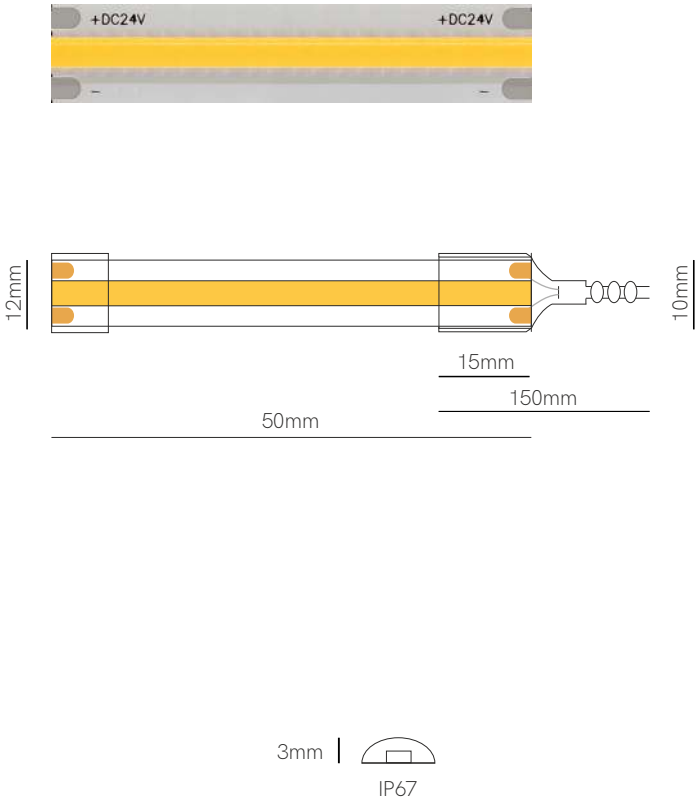

Compatible profiles.

 +  ✓



Technical Information

V / A / W 24V / 0,42A / 10W/m / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	86277	95 lm/w	950 lm/m	2700K	IP67
	86307	95 lm/w	950 lm/m	3000K	IP67
	86467	95 lm/w	1.140 lm/m	RGB-W 3.000K	IP67

Accessories


End Cap
32635


End Cap
32625

*Available in reel of 5 meters.
Accessories pages 317-319.

CE RoHS 

5 YEARS WARRANTY

10 2700K W/m 3000K

12 RGB-W W/m

480 LED/m

CRI ≥90



24 VDC


50mm 

LM-80

 COB


New

Fine 90

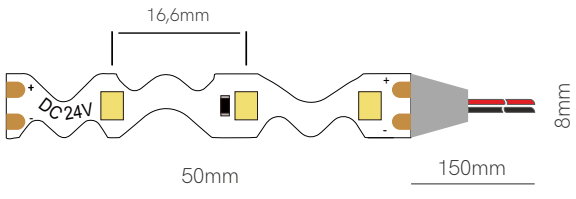

1,5mm |  IP20



Compatible profiles. 

Technical Information

V / A / W 24V / 0,42A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
90270	95 lm/w	950 lm/m	2700K	IP20
90300	105 lm/w	1.050 lm/m	3000K	IP20
90400	110 lm/w	1.100 lm/m	4000K	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.

3 YEARS
WARRANTY

10
W/m

60
LED/m

CRI
≥80



24
VDC

50mm




 LM-80

 2835

New

Fine 91

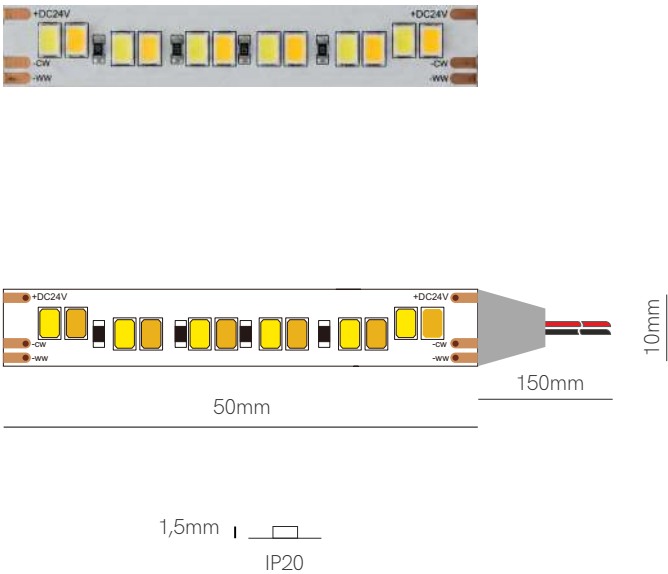

Compatible profiles.

 +  ✓



Technical Information

V / A / W 24V / 1,00A / 24W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	91360	95 lm/w	2.280 lm/m	2.700-6.000K	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.

5 YEARS WARRANTY

24 W/m

216 LED/m

 CRI ≥90



24 VDC

50mm




 LM-80

 COB



Fine 44

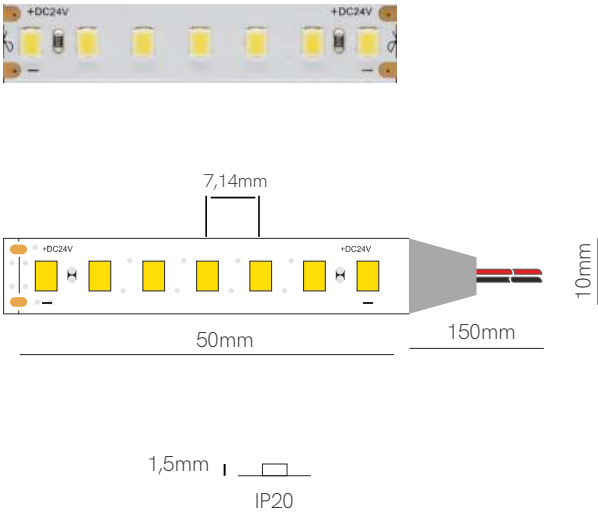

Compatible profiles.

 +  



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	44370	85lm/w	1.224 lm/m	MEAT (3.700K)	IP20
	44110	95 lm/w	1.368 lm/m	FISH (11.600K)	IP20
	44500	90 lm/w	1.296 lm/m	FRUIT (5.000K)	IP20
	44270	80 lm/w	1.152 lm/m	BREAD (2.700K)	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters.
Accessories pages 317-319.


























Fine 63

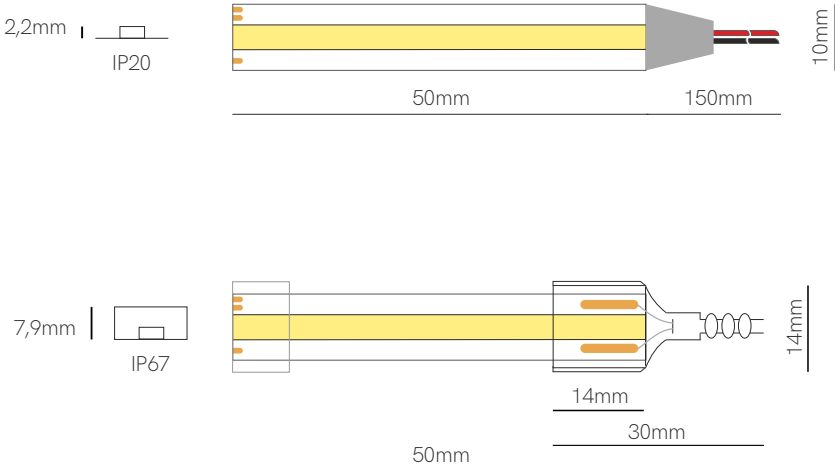

Compatible profiles.

 +  



Technical Information

V / A / W 24V / 0,79A / 19W/m


	Code	Lumens/w	Lumens/m	CCT	IP
Code	63360	80-95 lm/w	800-1.750 lm/m	2.700-6.500K	IP20
	63367	80-95 lm/w	800-1.750 lm/m	2.700-6.500K	IP67

*Available in reel of 5 meters.
Accessories pages 317-319.

 |  |  |  |  |  |  |  | 

Fine 36

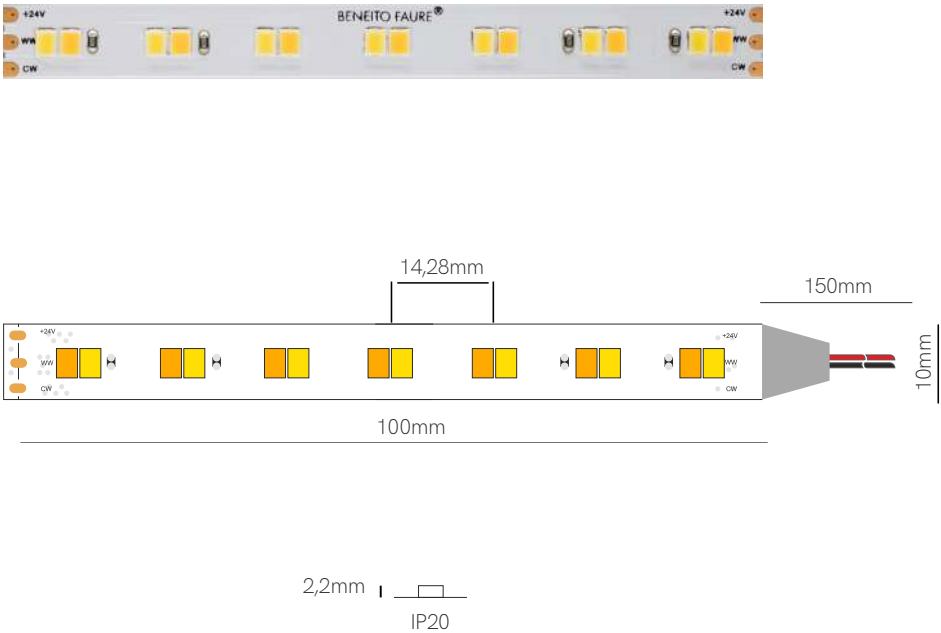

Compatible profiles.

Technical Information

V / A / W 24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	36360	90-110 lm/w	1.200 lm/m	2.700-5.000K	IP20

Accessories



Joint
13,57x11,63x3,5mm
20230




Joint
13,57x11,63x4,7mm
20130

*Available in reel of 5 meters.
Accessories pages 317-319.

New

Fine 81

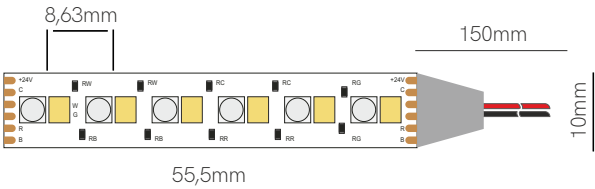

1,5mm | 
IP20

Compatible profiles.

 +  



Technical Information

V / A / W 24V / 0,94A / 22,5W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	81470	100 lm/w	2.250 lm/m	 2.700-6.000K	IP20

Accessories



Joint
 20738



Connector Cable
 20718



Joint
 20728


*Available in reel of 5 meters.
Accessories pages 317-319.



5 YEARS WARRANTY | 22,5 W/m | 216 LED/m | CRI ≥80 |  | 24 VDC | 55mm  | LM-80 |  2835



Fine 42

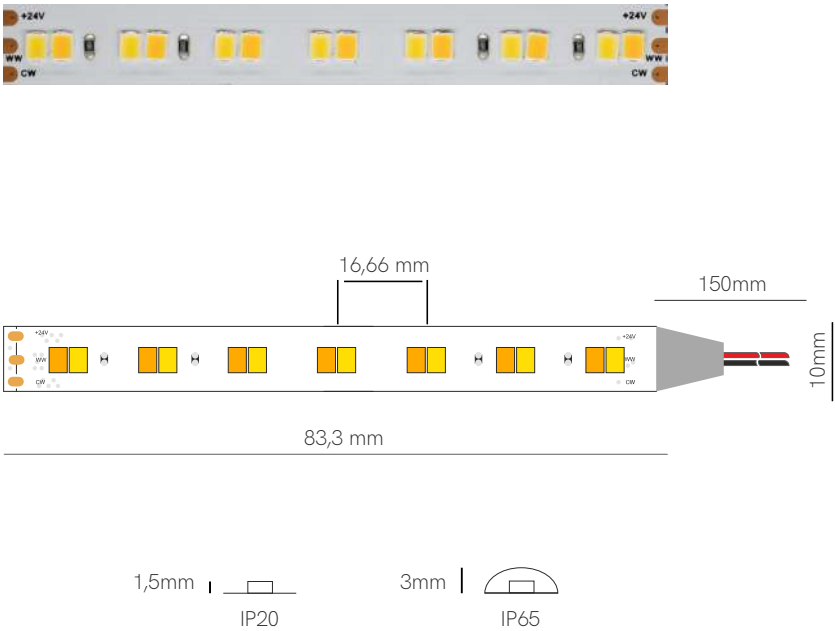

Compatible profiles.

 +  



Technical Information

V / A / W 24V / 0,8A / 19,2W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	42360	85-104 lm/w	1.728 lm/m	1.800-4.000K	IP20
	42365	85-104 lm/w	1.728 lm/m	1.800-4.000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,57x11,63x3,5mm
■ 20230



Joint
13,57x11,63x4,7mm
■ 20130



Joint
24,3x14,6x7,7mm
■ 20235



Joint
24,3x14,6x7,7mm
■ 20135

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



5 YEARS WARRANTY

19,2 W/m

168 LED/m





24 VDC


83,3mm







Fine 54

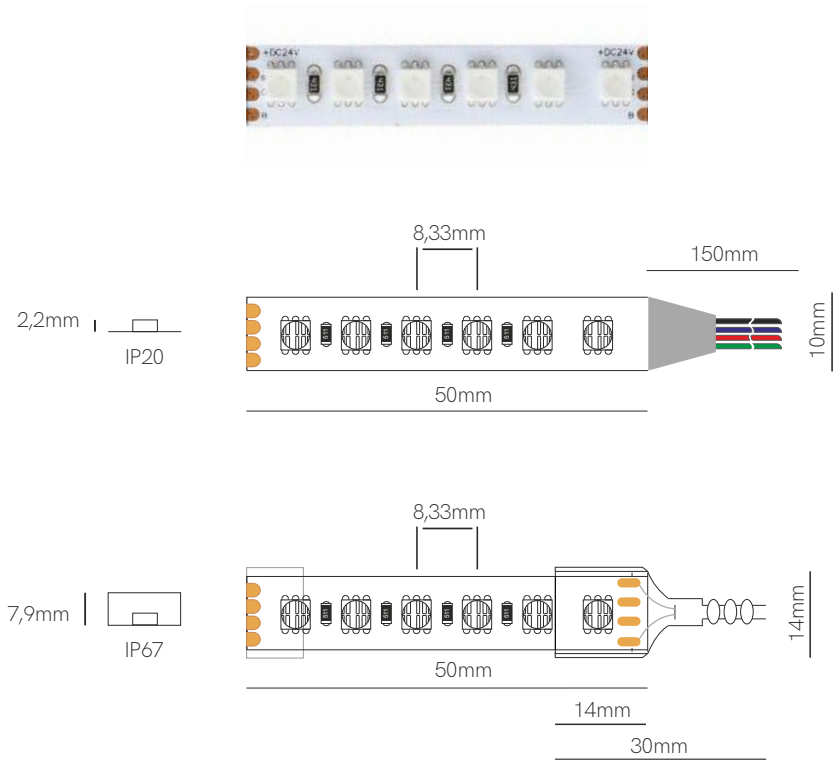

Compatible profiles.

 +  



Technical Information

V / A / W	24V / 0,6A / 14W/m
Red	33 lm/w 4,6W
Green	75 lm/w 4,6W
Blue	21 lm/w 4,6W

	Code	Lumens/w	Lumens/m	CCT	IP
Code	54460	50 lm/w	700 lm/m	RGB	IP20
	54467	45 lm/w	630 lm/m	RGB	IP67

Accessories



End Cap
32635



End Cap
32625



Joint
13,54x11,7x4,1mm
20240



Joint
13,56x13,46x4,7mm
20140

*Available in reel of 5 meters.
Accessories pages 317-319.



















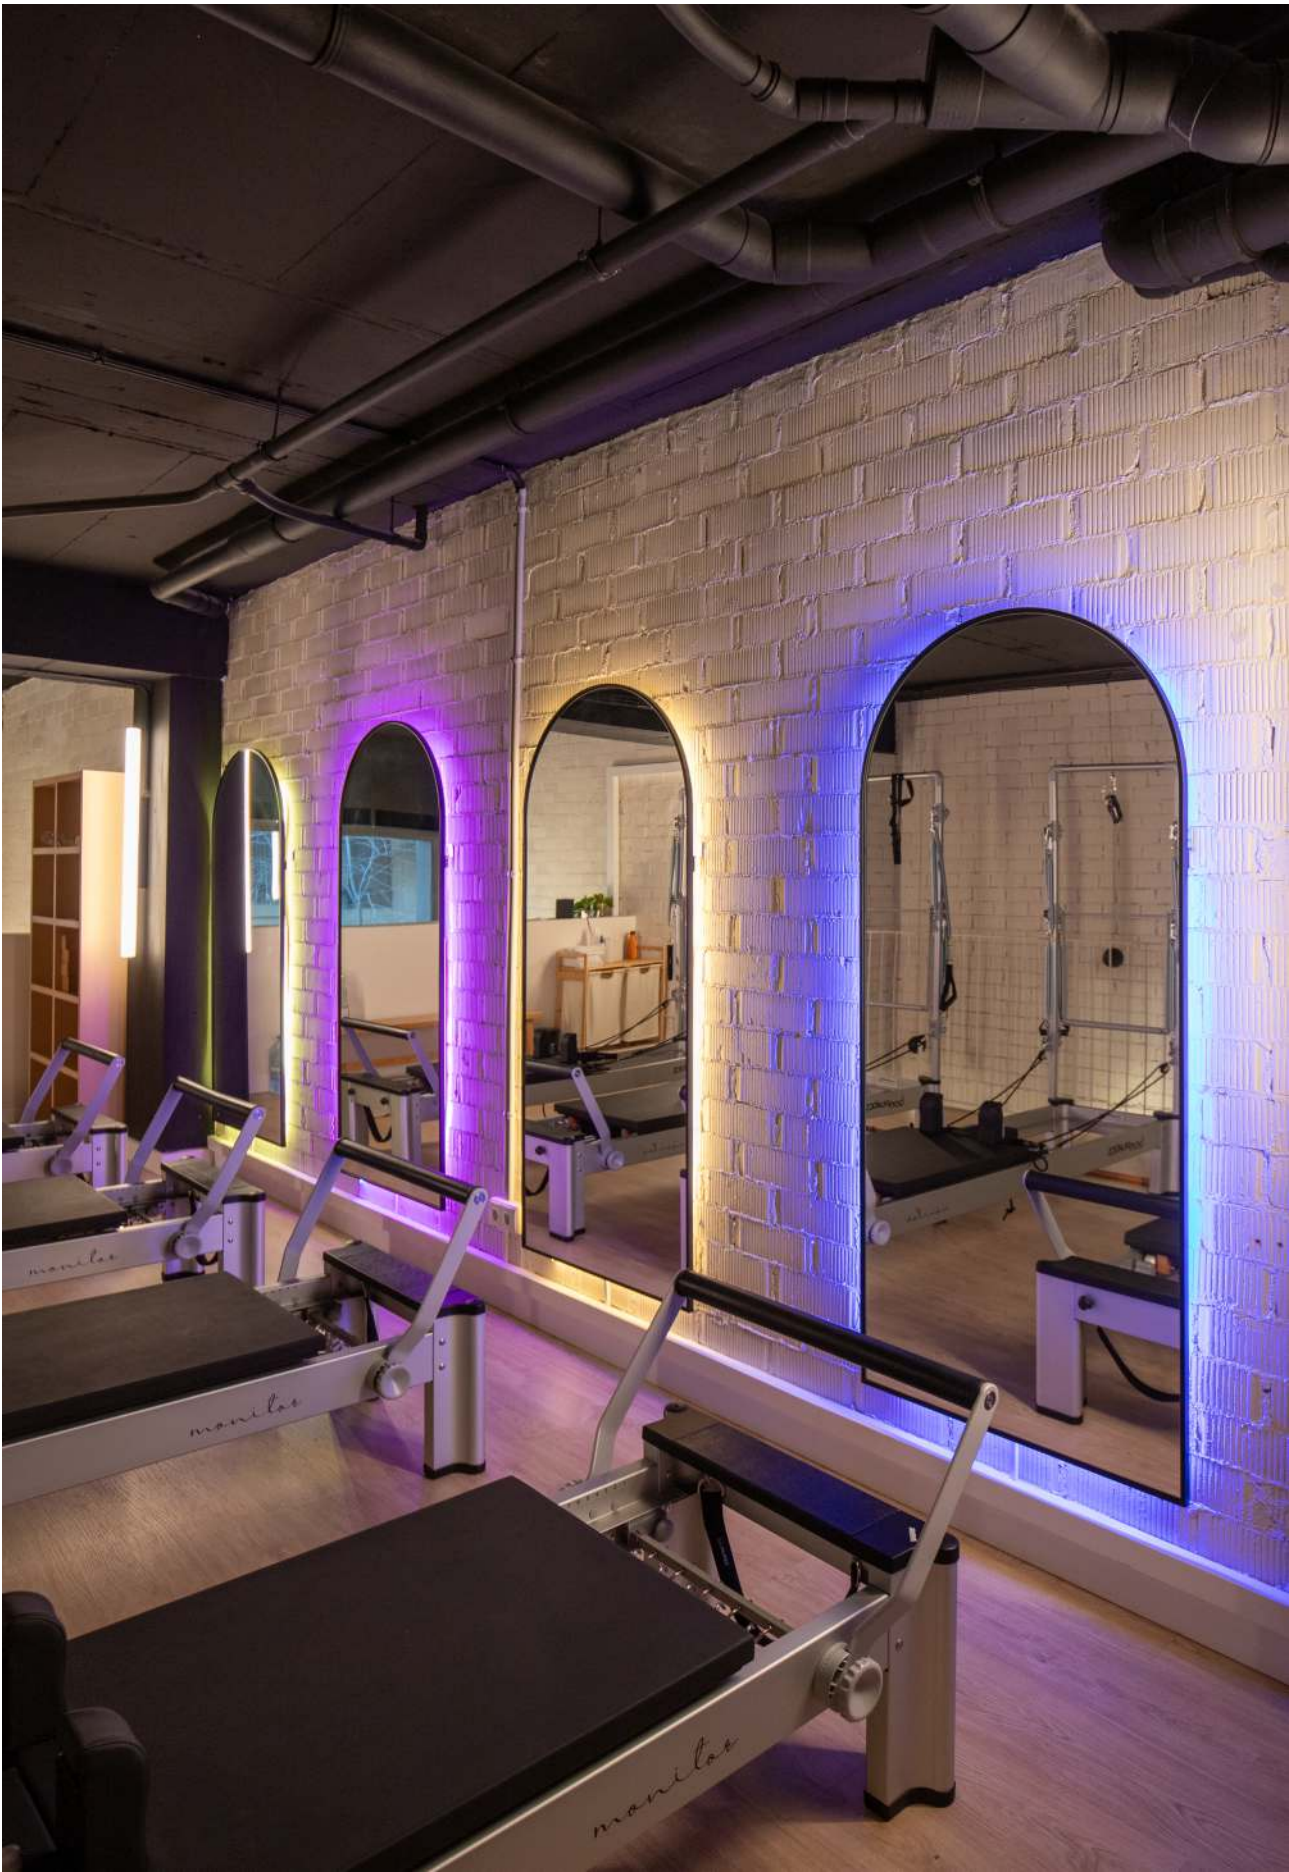


Connecta Fisioteràpia i Salut, Barcelona (Spain).

Fine 46

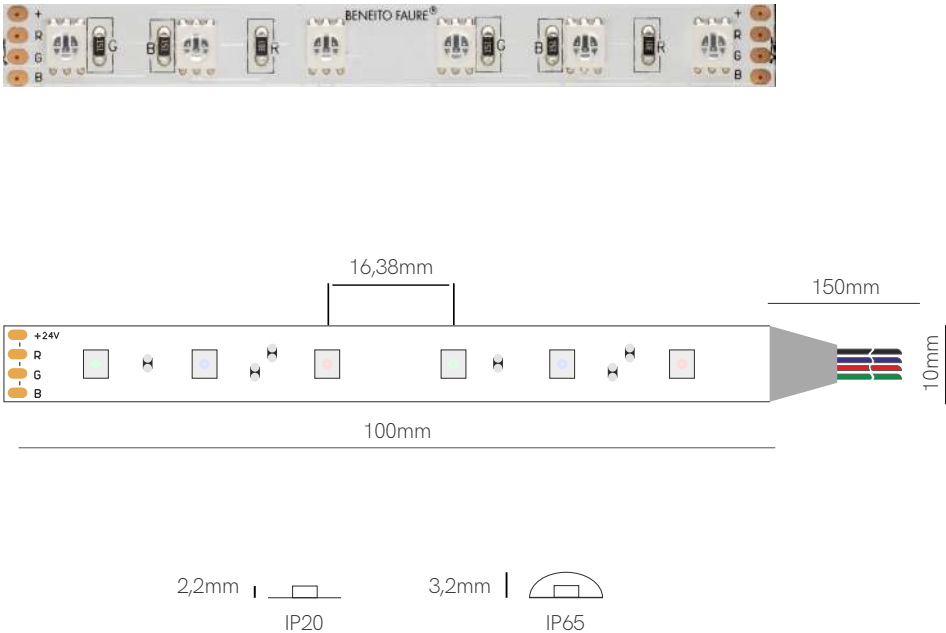

Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m
Red	33 lm/w 4,8W
Green	75 lm/w 4,8W
Blue	21 lm/w 4,8W

Code	Code	Lumens/w	Lumens/m	CCT	IP
	46460	38 lm/w	547 lm/m	RGB	IP20
	46465	41 lm/w	590 lm/m	RGB	IP65

Accessories



End Cap
20635



End Cap
20625



Joint
13,54x11,7x4,1mm
20240



Joint
13,56x13,46x4,7mm
20140



Joint
24,3x14,6x7,68mm
20245






Joint
24,3x14,6x7,68mm
20145

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



Fine 43

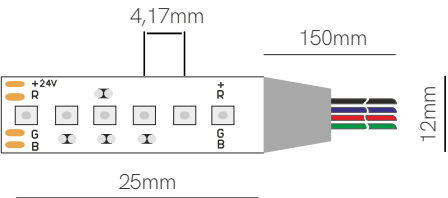

Compatible profiles.

Technical Information

V / A / W	24V / 0,8A / 19,2W/m
Red	23 lm/w 6,4W
Green	75 lm/w 6,4W
Blue	21 lm/w 6,4W

	Code	Lumens/w	Lumens/m	CCT	IP
Code	43430	58 lm/w	1.728 lm/m	RGB	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.

5 YEARS WARRANTY



19,2 W/m

240 LED/m

24 VDC

25mm

Fine 50

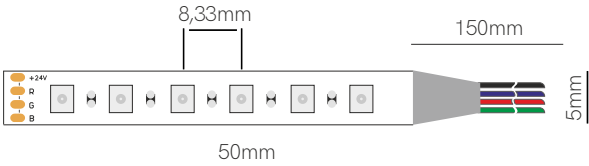

Compatible profiles.

 +  





Technical Information

V / A / W	24V / 0,4A / 9,6W/m
Red	25 lm/w 3,2W
Green	78 lm/w 3,2W
Blue	13 lm/w 3,2W

	Code	Lumens/w	Lumens/m	CCT	IP
Code	50460	58 lm/w	556 lm/m	RGB	IP20

*Available in reel of 5 meters.
Accessories pages 317-319.

5 YEARS
WARRANTY

9,6
W/m

120
LED/m

24
VDC




50mm




2835



Fine 60

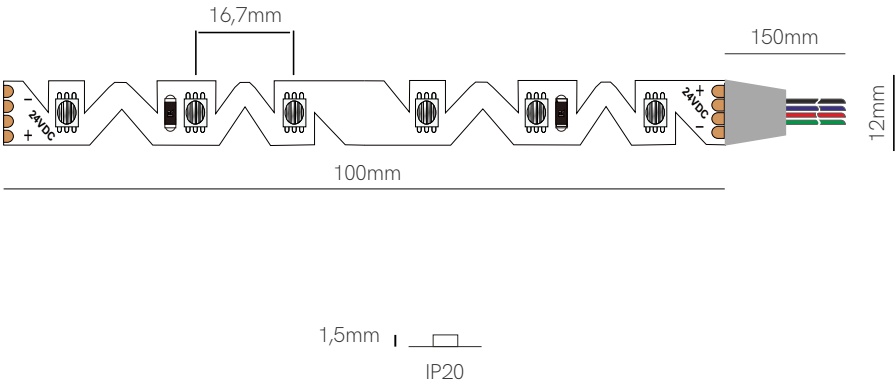

Compatible profiles.

 +  



Technical Information

V / A / W	24V / 0,33A / 8W/m
-----------	--------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	60460	81 lm/w	648 lm/m	RGB	IP20

Accessories



Joint
13,54x11,7x4,1mm
 20240



Joint
13,56x13,46x4,7mm
 20140

*Available in reel of 5 meters.
Accessories pages 317-319.

5 YEARS WARRANTY

8 W/m

60 LED/m

24 VDC




100mm



 5050

Fine 66 N

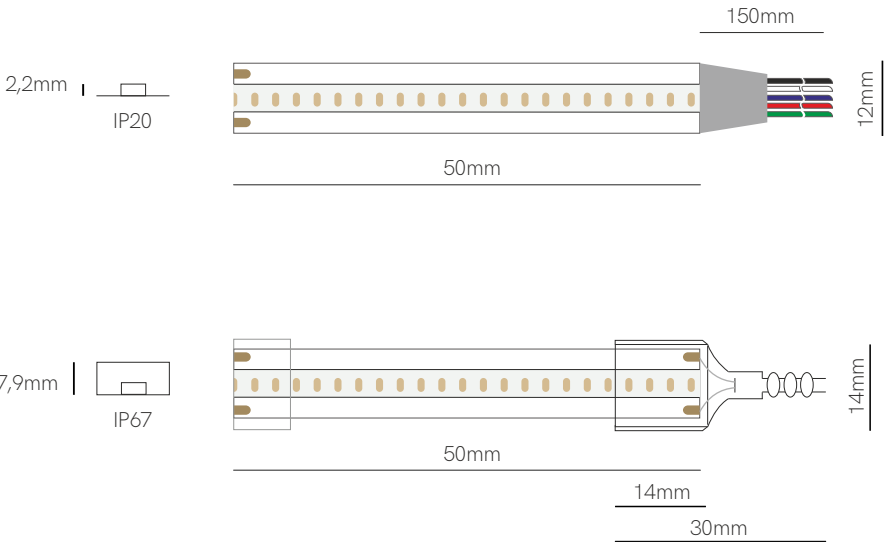

Compatible profiles.

Technical Information

V / A / W 24V / 1A / 24W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	66470/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP20
	66477/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP67

Accessories



*Available in reel of 5 meters.
Accessories pages 317-319.

5 YEARS WARRANTY


24 W/m

560 LED/m

24 VDC

50mm

Fine 71

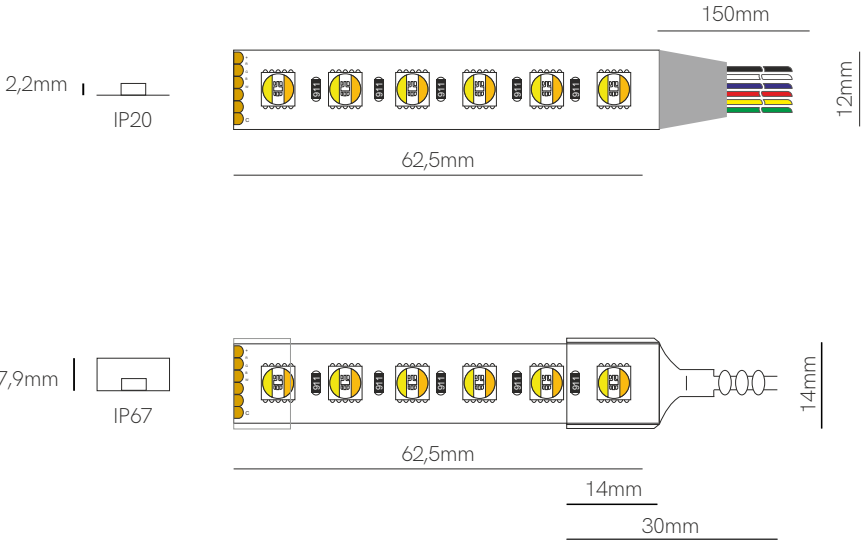

Compatible profiles.

 +  ✓



Technical Information

V / A / W 24V / 0,875A / 21W/m


	Code	Lumens/w	Lumens/m	CCT	IP
Code	71470	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP20
	71477	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP67

Accessories


End Cap
32635


End Cap
32625

*Available in reel of 5 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

21 W/m

96 LED/m

24 VDC




62,5mm



 5050

Fine 47

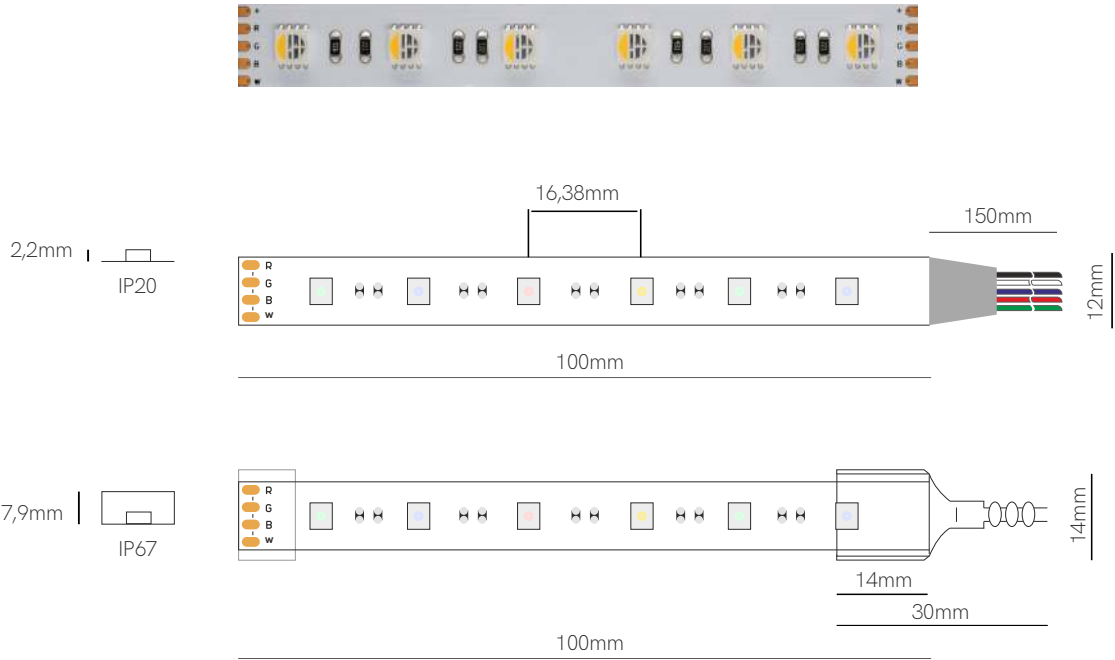

Compatible profiles.



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	47430	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP20
	47440	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP20
	47437	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP67
	47447	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP67

Accessories



End Cap
32635



End Cap
32625




Joint
13,5x13,73x4,2mm
20150



Joint
13,5x13,55x4,8mm
20250

*Available in reel of 5 or 25 meters.

Accessories pages 317-319.



5 YEARS
WARRANTY

14,4
W/m

60
LED/m


24
VDC



100mm



Fine 45

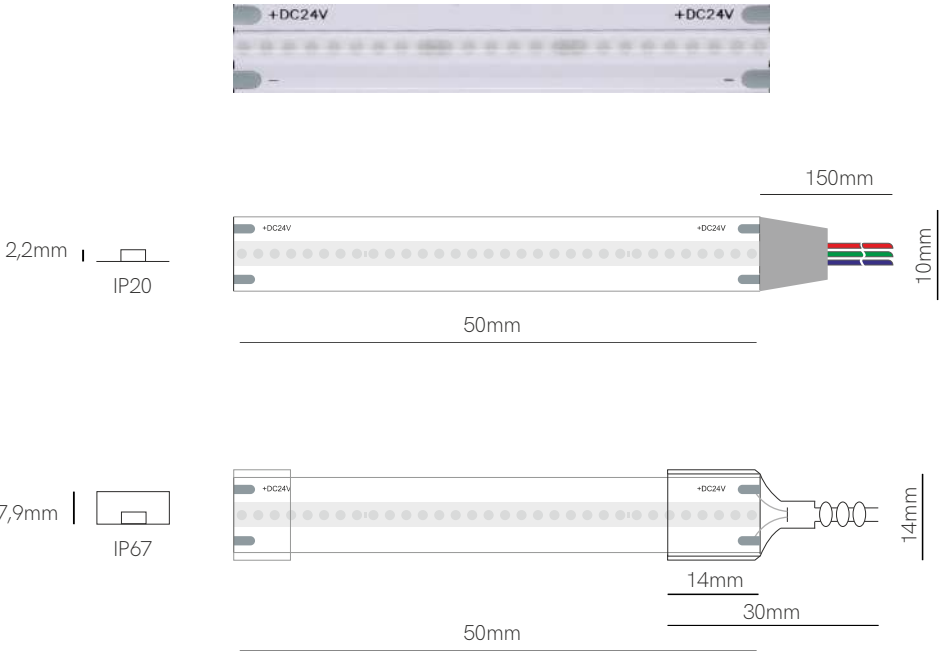

Compatible profiles.

 +  ✓



Technical Information

V / A / W 24V / 0,41A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	45220	15	150	RED	IP20
	45310	91	910	GREEN	IP20
	45520	13	130	BLUE	IP20
	45227	15	150	RED	IP67
	45317	91	910	GREEN	IP67
	45527	13	130	BLUE	IP67

Accessories


End Cap
32635


End Cap
32625


Clip
31709


Clip
31809


Joint
31909

*Available in reel of 10 meters.
Accessories pages 317-319.



5 YEARS WARRANTY

10 W/m

480 LED/m

24 VDC



50 mm





Running led strip


► VIDEO



Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip.

Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.


We do have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by Beneito & Faure, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.

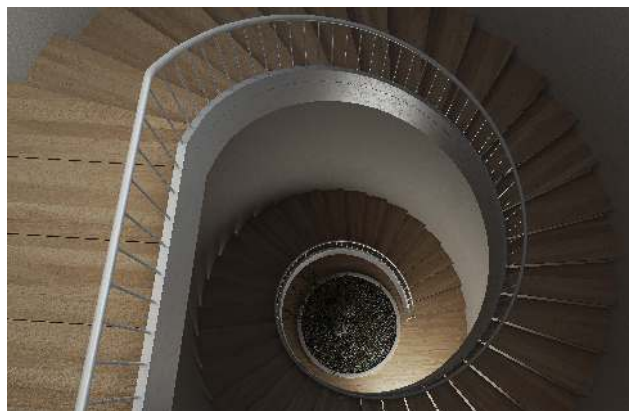

Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio.

Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por Beneito & Faure, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.

Fine running

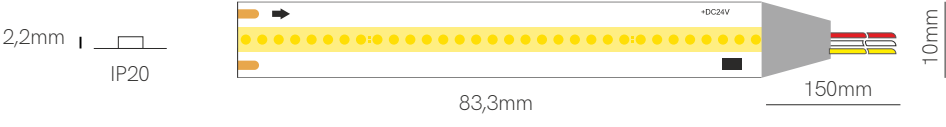

Compatible profiles.

 +  ✓





Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	WS2811 (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP1270 New	75 lm/w	900 lm/m	2700K	IP20
	SP1300	79 lm/w	950 lm/m	3000K	IP20
	SP1400	87 lm/w	1.050 lm/m	4000K	IP20

*Available in reel of 5 meters. Accessories pages 317-319.

Control

	Code	Version	Power Max	Pixels Max	VDC IN
	SP-9812	Controller	-	-	24 VDC
	SP-6329	Running Touch Controller	8A	1.024	24 VDC



3 YEARS WARRANTY

12 W/m

360 LED/m

 CRI ≥90



24 VDC

83,3mm





 SPI

 COB



Fine SPI-2

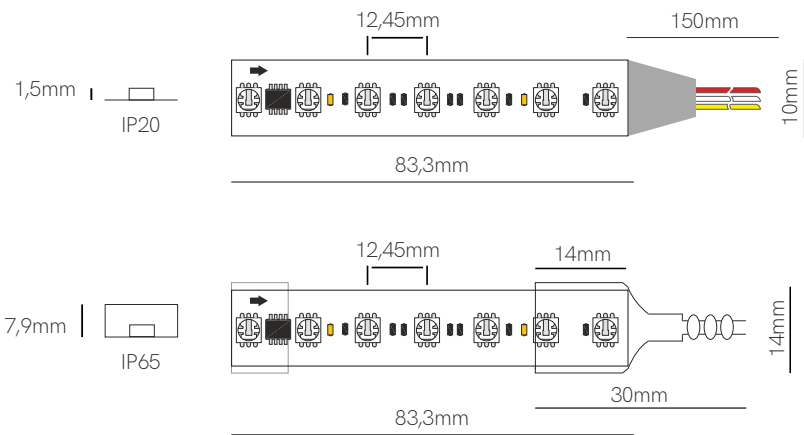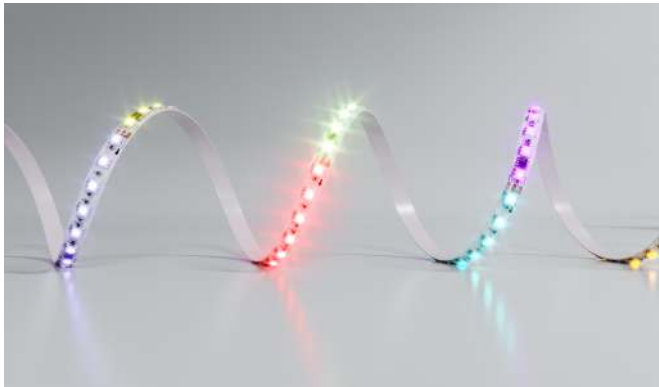

Compatible profiles.

 +  



Technical Information

V / A / W	24V / 0,58A / 14W/m
IC	SM16703PB (12px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
	SP2430	37 lm/w	515 lm/m	RGB	IP20
	SP2435	37 lm/w	515 lm/m	RGB	IP65

Accessories

 End Cap
 32635


 End Cap
 32625

*Available in reel of 5 meters.
Control accessories pages 323/338. Accessories pages 317-319.

 3 YEARS WARRANTY | 14 W/m | 84 LED/m |  24 VDC | 83,3mm  | SPI |  5050



Fine SPI-3

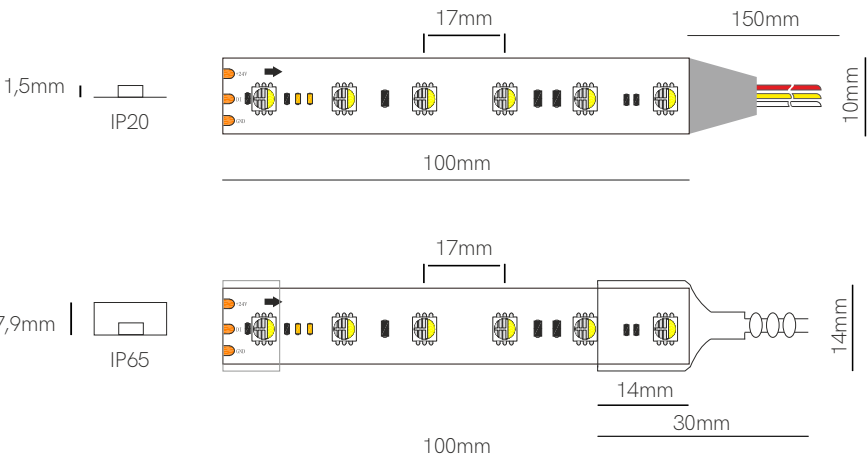

Compatible profiles.

 +  



Technical Information

V / A / W	24V / 0,45A / 11W/m
IC	SK6812 12MA (10px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP3470	51 lm/w	561 lm/m	 3.000K	IP20
	SP3475	51 lm/w	561 lm/m	 3.000K	IP65

Accessories



 End Cap
 32635

 End Cap
 32625

*Available in reel of 5 meters.
Control accessories pages 323/338. Accessories pages 317-319.

  11 W/m | 60 LED/m |  24 VDC | 100mm   

Fine SPI-4

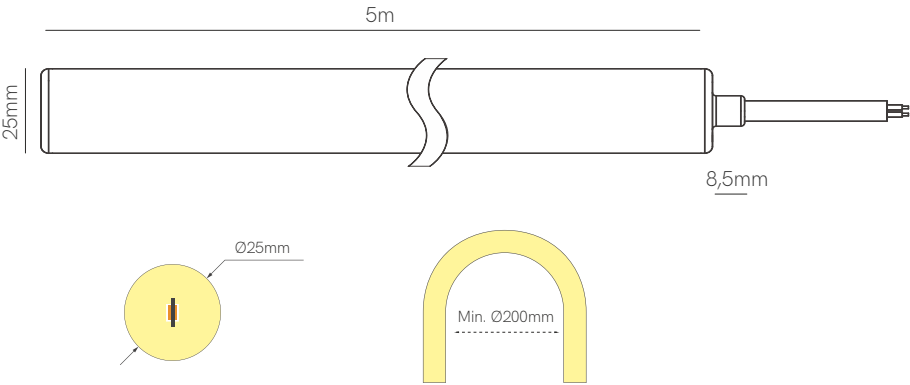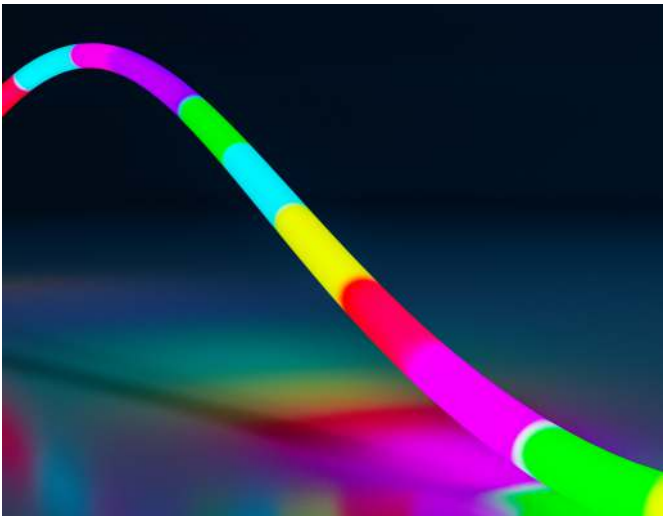

Technical Information

V / A / W	24V / 0,83A / 20W/m
IC	SK6812 12MA (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP4437	12,5 lm/w	250 lm/m	RGB	IP67

Accessories

End Cap
● 25627

End Cap
○ 25657-1
● 25657-2
○ 25657

Initial roof Cap
○ 25997-1
● 25997-2
○ 25997

Clip
○ 25530

Initial Cap
○ 25667-1
● 25667-2
○ 25667

Initial Cap
○ 25637

Tube
○ 25450

Joint with base
○ 25227-1
● 25227-2
○ 25227

Suspension kit
○ 25887

*Available in reel of 5 meters. Control accessories pages 323/338. Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY

20 W/m

168 LED/m

24 VDC


83,3mm

SPI

5050

New

Fine SPI-5

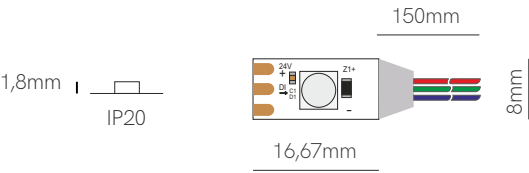

Compatible profiles.

 +  



Technical Information

V / A / W	24V / 0,50A / 12W/m
IC	WS2815P (60px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP5470	48 lm/w	576 lm/m	RGB	IP20

*Available in reel of 5 meters.

Control accessories pages 323/338. Accessories pages 317-319.

5 YEARS WARRANTY

12 W/m

60 LED/m



24 VDC

16,67mm













▶ VIDEO



Fine DMX-4

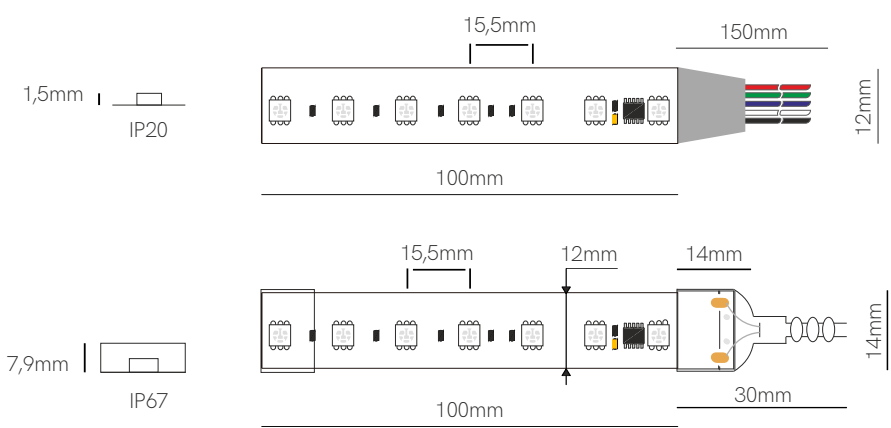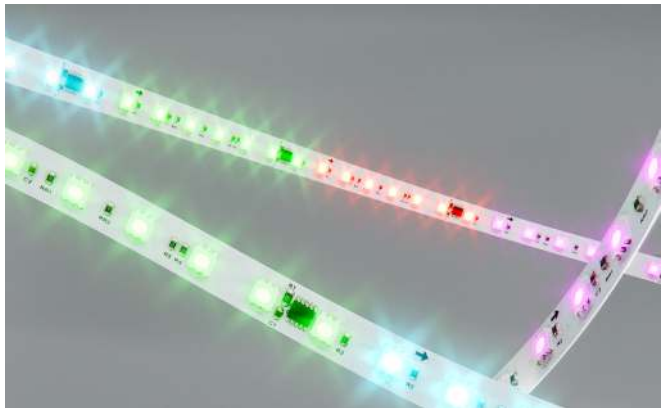

Compatible profiles.

 +  ✓



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM4430	42 lm/w	503 lm/m		IP20
	DM4437	42 lm/w	503 lm/m		IP67

Accessories

 End Cap
32635

 End Cap
32625


*Available in reel of 5 meters.

Control accessories page 338. Accessories pages 317-319.

CE RoHS  3 YEARS WARRANTY | 12 W/m | 70 LED/m |  24 VDC | 100mm  | DMX |  5050



Fine DMX-5

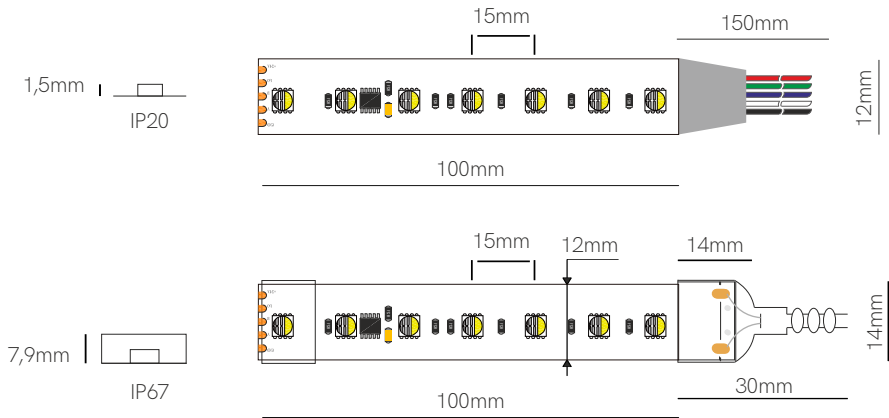

Compatible profiles.

 +  ✓



Technical Information

V / A / W	24V / 0,7A / 17W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM5470	50 lm/w	861 lm/m	RGB-W 3.000K	IP20
	DM5477	50 lm/w	861 lm/m	RGB-W 3.000K	IP67


Accessories


End Cap
32635


End Cap
32625

*Available in reel of 5 meters.

Control accessories page 338. Accessories pages 317-319.



3 YEARS WARRANTY

17 W/m

70 LED/m



24 VDC

100mm



DMX



NEON IP67 LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.



Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.

Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.



Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.





FITSEVENEVEN®, Club Frankfurt Airport.

Fine 25

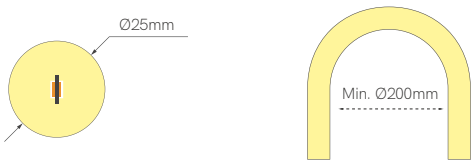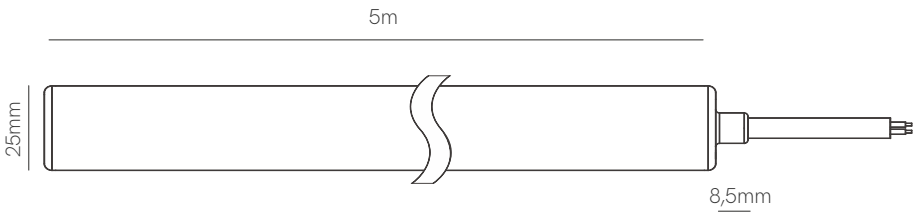

Technical Information

V / A / W	24V / 0,83A / 20W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	25247	60 lm/w	1.200 lm/m	2400K	IP67
	25277	65 lm/w	1.300 lm/m	2700K	IP67
	25307	69 lm/w	1.380 lm/m	3000K	IP67
	25407	73 lm/w	1.460 lm/m	4000K	IP67
	25367	55 lm/w	1.100 lm/m	2700K-4200K	IP67
	25467	41 lm/w	820 lm/m	RGB	IP67

*Available in reels of 1,5 m, 3 m and 5 meters.

Accessories

End Cap
● 25627

End Cap
○ 25657-1
● 25657-2
○ 25657

Initial roof Cap
○ 25997-1
● 25997-2
○ 25997

Clip
● 25530

Initial Cap
○ 25667-1
● 25667-2
○ 25667

Initial Cap
● 25637

Tube
● 25450


Joint with base
○ 25227-1
● 25227-2
○ 25227

Suspension kit
● 25887

Accessories pages 317-319.



Fine 34

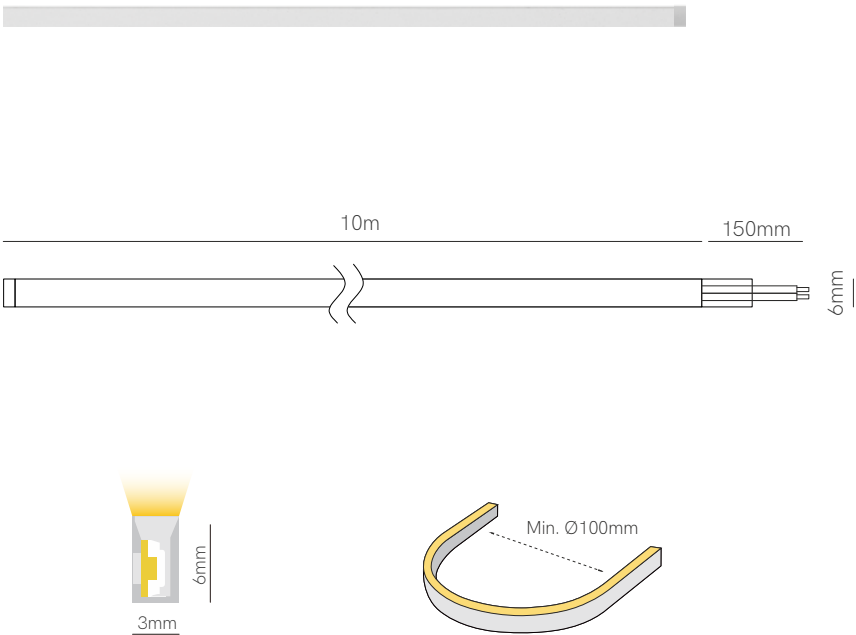

Technical Information

V / A / W	24V / 0,21A / 5W/m
-----------	--------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	34277	28 lm/w	140 lm/m	2700K	IP67
	34307	30 lm/w	150 lm/m	3000K	IP67
	34407	32 lm/w	160 lm/m	4000K	IP67

Accessories



End Cap
34627



End Cap
34637



Clip
1000x5,8x5mm
34119

*Available in reel of 10 meters.
Accessories pages 317-319.





























Fine 77



Technical Information

V / A / W	24V / 0,33A / 12W/m / 8W/m
-----------	----------------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	77277	50 lm/w	600 lm/m	2700K	IP67
	77307	51 lm/w	612 lm/m	3000K	IP67
	77407	55 lm/w	660 lm/m	4000K	IP67
	77437	26 lm/w	208 lm/m	RGB	IP67

Accessories

End Cap
77627

End Cap
77967

End Cap
77997

End Cap
77637

Clip
30x18x18mm
77580


Clip
1000x18x18mm
77819

Clip
1000x18x18mm
77953

*Available in reel of 10 meters. Accessories pages 317-319.



Fine 70

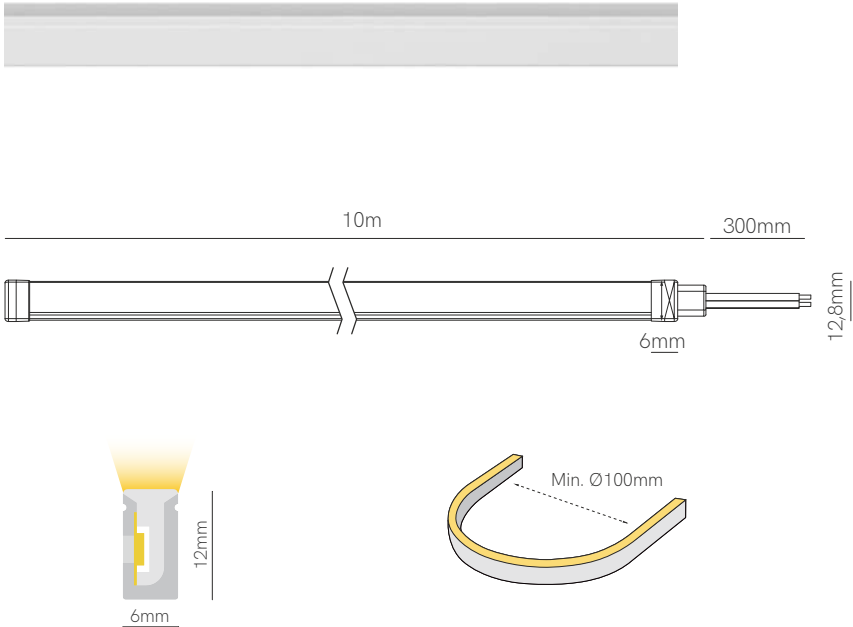

Technical Information

V / A / W	24V / 0,20A / 5W/m
-----------	--------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	70277	31 lm/w	155 lm/m	2700K	IP67
	70307	35 lm/w	175 lm/m	3000K	IP67
	70407	37 lm/w	185 lm/m	4000K	IP67
	70437	15 lm/w	75 lm/m	RGB	IP67





Accessories

End Cap 70627	End Cap 70967	End Cap 70637	Clip 19,7x8x13mm 70330	Clip 1000x8x13mm 70119	Clip 1000x7,5x12,5mm 70350

*Available in reel of 10 meters.
Accessories pages 317-319.



Fine 72

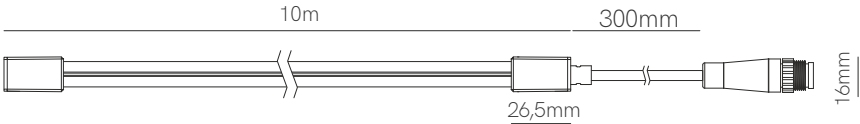

Technical Information

V / A / W	24V / 0,41A / 10W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	72277	59 lm/w	590 lm/m	2700K	IP67
	72307	62 lm/w	620 lm/m	3000K	IP67
	72407	65 lm/w	650 lm/m	4000K	IP67
	72437	26 lm/w	260 lm/m	RGB	IP67




Accessories

End Cap	End Cap	End Cap	End Cap	Clip	Clip	Clip	Extension cable
72967-L2	72967-2	72627-2	72637	20,2x14x14mm	1000x14x14mm	1000x14x18mm	77946 (Mono)
72967-L4	72967-4	72627-4		77530	77519	77350	77920 (RGB)

*Available in reel of 10 meters. Accessories pages 317-319.



Fine 74

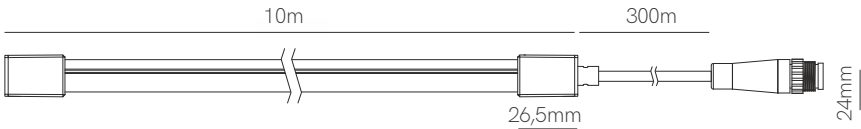

Technical Information

V / A / W	24V / 0,41A / 10W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	74277	59 lm/w	590 lm/m	2700K	IP67
	74307	62 lm/w	620 lm/m	3000K	IP67
	74407	65 lm/w	650 lm/m	4000K	IP67
	74437	22 lm/w	220 lm/m	RGB	IP67


Accessories

							
End Cap	End Cap	End Cap	End Cap	Clip	Clip	Clip	Extension cable
74967-L2	74967-2	74627-2	74637	20x12,7x18,7mm	1000x14,5x21,5mm	1000x13,5x18mm	77946 (Mono)
74967-L4	74967-4	74627-4		77330	77119	77350	77920 (RGB)

*Available in reel of 10 meters. Accessories pages 317-319.

New

Fine 73

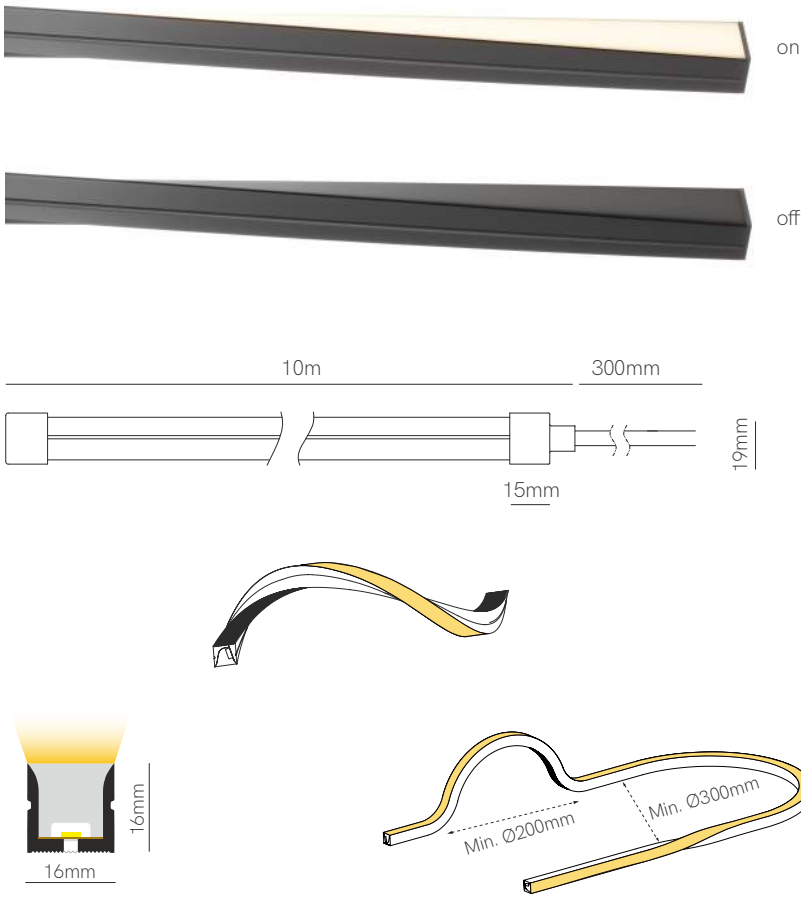

Technical Information

V / A / W	24V / 0,60A / 14,4W/m
-----------	-----------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	73277	48 lm/w	691 lm/m	2700K	IP67
	73307	51 lm/w	734 lm/m	3000K	IP67

Accessories

End Cap ■ 73627	End Cap ■ 73967	End Cap ■ 73637	Clip 30x18x18mm ■ 73580	Clip 1000x18x18mm ■ 73819	Clip 1000x18x18mm ■ 73953

*Available in reel of 10 meters. Accessories pages 317-319.

Led strips accessories

Cables



Parallel Cable
2x0,5mm

■ 332



Flat Sheathed Cable
2x0,5mm

○ 332PB



Round Sheathed Cable
2x0,5mm

○ 332RB

● 332RN



Round Sheathed Cable
3x0,5mm

○ 333RB

● 333RN



Parallel Cable
4x0,5mm

■ 334



Round Sheathed Cable
4x0,35mm

○ 334RB

● 334RN



Parallel Cable
5x0,5mm

■ 335



Round Sheathed Cable
5x0,35mm

○ 335RB

● 335RN



Round Sheathed Cable
6x0,22mm

○ 336

SMD / COB 8mm Monocolor IP20



Connector Cable

■ 20818



Joint

■ 20828



L Joint

■ 20838



Joint

■ 20738



Connector Cable

■ 20718



Joint

■ 20728

8mm IP67



End cap

■ 20825



End cap

■ 20865

COB 5mm



Connector Cable

■ 20518



Joint

■ 20528

SMD 10mm Monocolor IP20



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
15,4x11,5x5,7mm
■ 20991



Joint
21,6x11,5x5,7mm
■ 20999



L Joint
19x12x5mm
■ 20C90

SMD 10mm Monocolor IP65



End Cap
○ 20635



End Cap
○ 20625



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

SMD / COB 8mm Monocolor IP20



L Joint
19x19x5mm
■ 20T90

Fine 32 / Fine 75 IP65



End Cap
■ 32635



End Cap
■ 32625



Connector kit
■ 32699



Join 180°
■ 32899



Join 90°
■ 32499



Clip
■ 32900



Joint
■ 32299

SMD / COB 10mm Monocolor IP20



Joint
■ 31709



Joint
■ 31809



Joint
■ 31909



L Joint
19x12x5mm
■ 20C90



L Joint
19x19x5mm
■ 20T90

SMD / COB 10mm IP67



End Cap
■ 32635



End Cap
■ 32625

SMD 10mm CCT IP20



Joint
13,8x11,55x3,9mm
■ 20230



Joint
13,55x11,67x4,7mm
■ 20130

SMD 10mm CCT IP65



End Cap
■ 20635



End Cap
■ 20625



Joint
24,3x14,6x7,7mm
■ 20235



Joint
24,3x14,6x7,7mm
■ 20135

SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
■ 20240



Joint
13,56x13,46x4,7mm
■ 20140

SMD 10mm RGB IP65



End Cap
○ 20635



End Cap
○ 20625



Joint
24,3x14,6x7,68mm
■ 20245



Joint
24,3x14,6x7,68mm
■ 20145

SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
■ 20150



Joint
13,5x13,55x4,8mm
■ 20250

COB 12mm RGBW IP20



Connector cable
■ 20066



Joint
■ 20266

SMD 5mm Monocolor IP20



Connector Cable
■ 20049



Joint
■ 20249

Single-wire connections



20917



20915

Bipolar connections



20927



20925

FINE 20	0,50 mm	1,00 mm	—	—	—
FINE 25	0,75 mm	1,50 mm	—	—	—
FINE 26	0,75 mm	—	—	—	—
FINE 30	1,00 mm	—	—	—	—
FINE 31	0,50 mm	1,00 mm	—	—	—
FINE 32N	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 34	0,35 mm	0,35 mm	0,50 mm	0,75 mm	—
FINE 36	0,50 mm	1,00 mm	—	—	—
FINE 37	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 41	0,50 mm	0,75 mm	1,50 mm	—	—
FINE 42	0,50 mm	1,00 mm	—	—	—
FINE 43	0,50 mm	1,00 mm	—	—	—
FINE 44	0,50 mm	0,75 mm	—	—	—
FINE 45	0,35 mm	0,50 mm	0,75 mm	—	—
FINE 46	0,50 mm	0,75 mm	1,50 mm	—	—
FINE 47	0,35 mm	0,75 mm	1,50 mm	—	—
FINE 48	0,35 mm	0,35 mm	0,50 mm	—	—
FINE 49	0,50 mm	—	—	—	—
FINE 50	0,35 mm	—	—	—	—
FINE 51	0,50 mm	0,75 mm	1,00 mm	1,50 mm	—
FINE 52	0,75 mm	1,50 mm	—	—	—
FINE 54	0,50 mm	0,75 mm	—	—	—
FINE 55	1,00 mm	—	—	—	—
FINE 56	0,75 mm	1,50 mm	—	—	—
FINE 60	0,35 mm	0,50 mm	—	—	—
FINE 61	0,50 mm	0,75 mm	—	—	—
FINE 63	0,50 mm	1,00 mm	—	—	—
FINE 64	0,35 mm	0,35 mm	0,50 mm	—	—
FINE 66 N	0,75 mm	1,50 mm	—	—	—
FINE 68	0,50 mm	1,00 mm	—	—	—
FINE 69	0,50 mm	0,75 mm	1,00 mm	—	—
FINE 70	0,35 mm	0,50 mm	0,75 mm	—	—
FINE 71	0,75 mm	1,50 mm	—	—	—
FINE 72	0,50 mm	0,75 mm	—	—	—
FINE 73	0,50 mm	0,75 mm	—	—	—
FINE 74	0,50 mm	0,75 mm	—	—	—
FINE 75	0,35 mm	0,50 mm	0,75 mm	—	—
FINE 76	0,50 mm	0,75 mm	1,00 mm	—	—
FINE 77	0,50 mm	1,00 mm	—	—	—
FINE 79	0,35 mm	0,75 mm	1,00 mm	—	—
FINE 81	0,75 mm	1,50 mm	—	—	—
FINE 82	0,50 mm	0,75 mm	1,00 mm	—	—
FINE 84	0,35 mm	0,35 mm	0,50 mm	0,75 mm	—
FINE 86	0,75 mm	1,50 mm	—	—	—
FINE 88	0,50 mm	1,00 mm	—	—	—
FINE 90	0,50 mm	0,75 mm	1,00 mm	—	—
FINE 91	0,50 mm	1,00 mm	—	—	—
FINE 92	0,35 mm	0,75 mm	1,00 mm	—	—
FINE 96	0,50 mm	1,00 mm	—	—	—
FINE 97	0,50 mm	0,75 mm	1,00 mm	—	—
DMX-4 / DMX5	0,50 mm	—	—	—	—
FINE RUNNING	0,50 mm	—	—	—	—
SPI-2 / SPI-3	0,50 mm	—	—	—	—
SPI-4 / SPI-5	0,75 mm	—	—	—	—

*Cable section.

	Open circuit					Back feed				
	5 mts	10 mts	15 mts	20 mts	25 mts	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 20	100%	87%	—	—	—	100%	98%	—	—	—
FINE 25	100%	—	—	—	—	—	—	—	—	—
FINE 26	100%	—	—	—	—	—	—	—	—	—
FINE 30	100%	—	—	—	—	—	—	—	—	—
FINE 31	100%	90%	—	—	—	100%	95%	—	—	—
FINE 32N	100%	98%	95%	92%	90%	—	—	—	—	—
FINE 34	100%	100%	—	—	—	—	—	—	—	—
FINE 36	100%	86%	—	—	—	100%	93%	—	—	—
FINE 37	100%	100%	100%	95%	90%	100%	100%	100%	100%	100%
FINE 41	100%	80%	70%	—	—	100%	94%	90%	—	—
FINE 42	100%	87%	—	—	—	100%	93%	—	—	—
FINE 43	100%	—	—	—	—	100%	98%	—	—	—
FINE 44	100%	80%	—	—	—	100%	94%	—	—	—
FINE 45	100%	80%	70%	—	—	100%	94%	85%	—	—
FINE 46	100%	80%	70%	—	—	100%	94%	90%	—	—
FINE 47	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 48	100%	100%	85%	—	—	100%	100%	96%	—	—
FINE 49	100%	—	—	—	—	—	—	—	—	—
FINE 50	100%	—	—	—	—	—	—	—	—	—
FINE 51	100%	100%	100%	100%	—	—	—	—	—	—
FINE 52	100%	90%	—	—	—	100%	98%	—	—	—
FINE 54	100%	80%	—	—	—	100%	90%	—	—	—
FINE 55	100%	80%	—	—	—	100%	95%	—	—	—
FINE 56	100%	80%	—	—	—	100%	95%	—	—	—
FINE 60	100%	90%	—	—	—	100%	98%	—	—	—
FINE 61	100%	90%	80%	—	—	100%	98%	92%	—	—
FINE 63	100%	80%	—	—	—	100%	92%	—	—	—
FINE 64	100%	100%	90%	—	—	100%	100%	96%	—	—
FINE 66 N	100%	88%	—	—	—	100%	95%	—	—	—
FINE 68	100%	95%	—	—	—	100%	100%	—	—	—
FINE 69	100%	95%	90%	85%	—	100%	100%	95%	95%	—
FINE 70	100%	—	—	—	—	—	—	—	—	—
FINE 71	100%	87%	—	—	—	100%	97%	—	—	—
FINE 72	100%	—	—	—	—	—	—	—	—	—
FINE 73	100%	87%	—	—	—	—	—	—	—	—
FINE 74	100%	—	—	—	—	—	—	—	—	—
FINE 75	100%	98%	95%	92%	90%	—	—	—	—	—
FINE 76	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 77	100%	—	—	—	—	—	—	—	—	—
FINE 79	100%	90%	85%	—	—	100%	97%	95%	—	—
FINE 81	100%	87%	—	—	—	100%	97%	—	—	—
FINE 82	100%	100%	85%	—	—	100%	100%	90%	—	—
FINE 84	100%	95%	90%	85%	—	100%	100%	95%	95%	—
FINE 86	100%	88%	—	—	—	100%	95%	—	—	—
FINE 88	100%	—	—	—	—	—	—	—	—	—
FINE 90	100%	90%	80%	—	—	100%	98%	93%	—	—
FINE 91	100%	87%	—	—	—	100%	98%	—	—	—
FINE 92	100%	100%	85%	—	—	100%	100%	90%	—	—
FINE 96	100%	80%	—	—	—	100%	95%	—	—	—
FINE 97	100%	95%	90%	—	—	100%	100%	95%	—	—
DMX-4 / DMX-5	100%	—	—	—	—	—	—	—	—	—
FINE RUNNING	100%	—	—	—	—	—	—	—	—	—
SPI-2 / SPI-3	100%	—	—	—	—	—	—	—	—	—
SPI-4 / SPI-5	100%	—	—	—	—	—	—	—	—	—



*Efficiency (%).



▶ VIDEO




Dynamic control

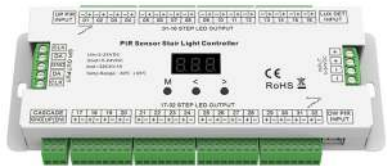

Stair light controller with dual PIR sensor + double push button (up & down), and daytime detection function. Controls a maximum of 32 steps.
Controlador de iluminación para escaleras con sensor PIR dual, doble pulsador (subir y bajar) y función de detección de luz diurna. Controla hasta 32 escalones.

PIR stair light controller (single color led strip)


Code	VDC IN	VDC OUT	Output current	Output power	Sensitive field	Sensitive angle
85732 ☐	5-24VDC	32 x (5-24)VDC	32CH,1A/CH	32 x (5-24)W	≤3m	30° (±10°)



Stair light controller / SPI led scenes + double push button (up & down). Controls speed and brightness. Suitable for multiple ICs.
Controlador de iluminación para escaleras / Escenas LED SPI + doble pulsador (subir y bajar).
Controla la velocidad y el brillo. Compatible con múltiples circuitos integrados.

SPI light controller (RGB or white light led pixel strip)


Code	VDC IN	Input current	Output signal	Pixel number
85769 ☐	5-24VDC	15A	2 X SPI(TTL)	Max 960



Stair light controller / SPI led scenes with dual PIR sensor + double push button (up&down), and daylight detection function. Suitable for multiple ICs.
Controlador de iluminación para escaleras / Escenas LED SPI con sensor PIR dual + pulsador doble (subir/bajar) y función de detección de luz diurna.
Compatible con múltiples circuitos integrados.

SPI light controller stairs / scenes (RGB or white light led pixel strip)







Code	VDC IN	Input current	Output signal	Pixel number	Sensitive field	Sensitive angle
85753 ☐	5-24VDC	15A	2 X SPI(TTL)	Max 960	≤3m	30° (±10°)



5 YEARS WARRANTY | IP 20





Smart home solution

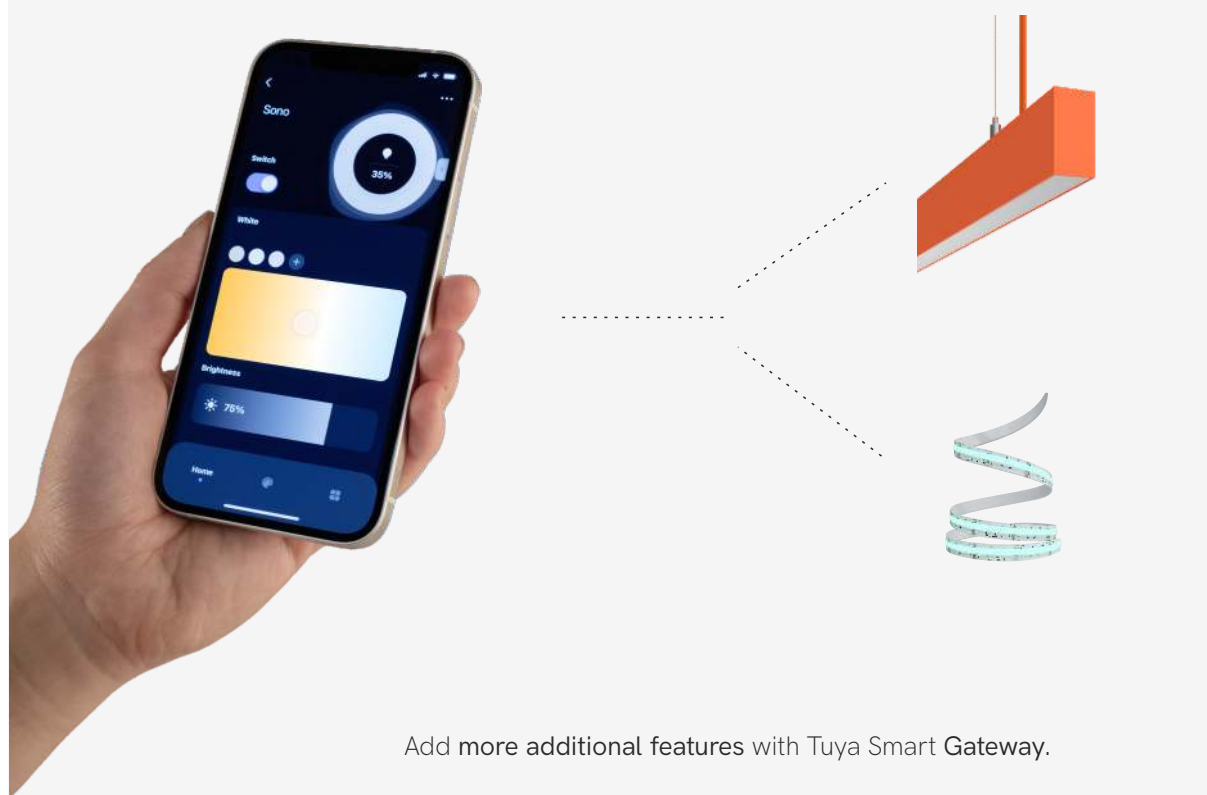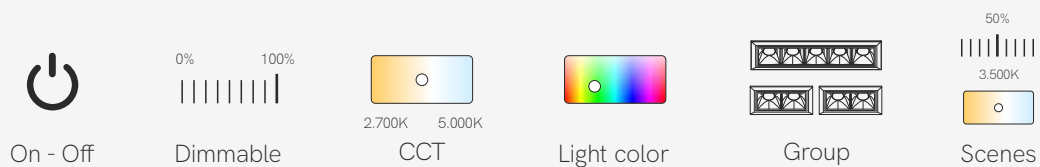

All products with Tuya logo can have these functions.

CASAMBI

Professional solution

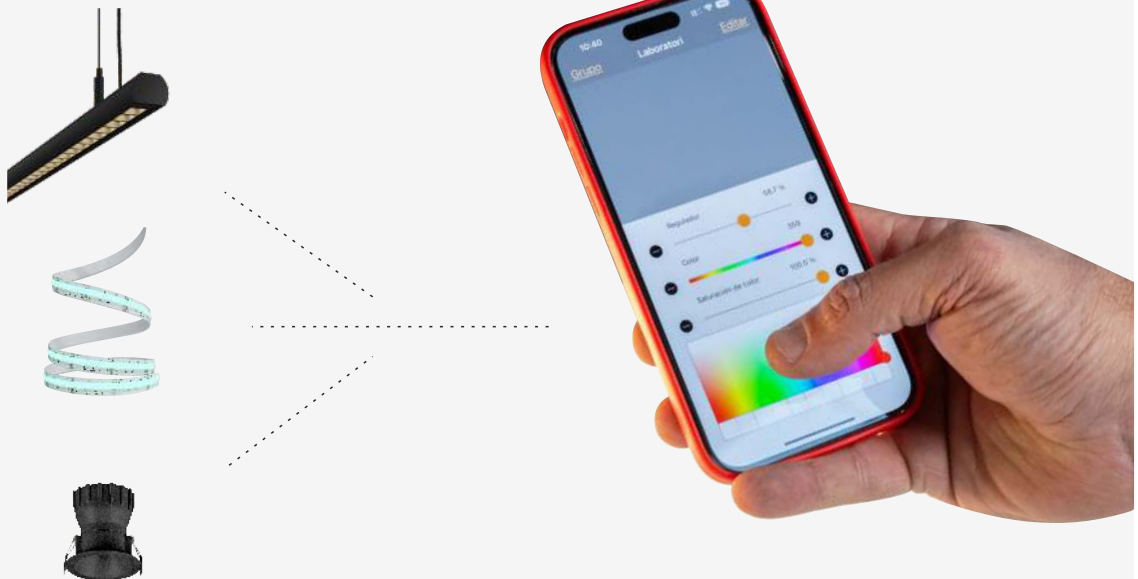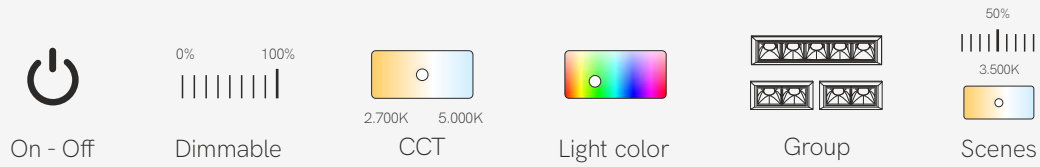

Add more additional features with Casambi Smart Gateway.



Schedule day and time



Control from anywhere via internet



All products with Casambi logo can have these functions.



RF Control

	Code	Version	Power Max	VDC IN	Size
1.	85890 ■	RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85360 ■	RF CCT	-	3VDC (CD2032)	139x36x11mm
3.	85460 ■	RF RGB	-	3VDC (CR2032)	139x36x11mm
4.	85470 ■	RF RGB-W	-	3VDC (CR2032)	139x36x11mm
5.	85990 ■	RF RGB+CCT	-	3VDC (CR2032)	139x36x11mm
6.	85894 ■	RF Dimming 4 Zones	-	3VDC (CR2032)	138x50x22mm
7.	85364 ■	RF CCT 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
8.	85475 ■	RF RGB-W 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
9.	85995 ■	RF RGB+CCT 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
10.	84431 □	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
11.	84432 ■	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
12.	85144 ■	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
13.	85244 ■	RF CCT 4 Zones 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
14.	85444 ■	RF RGB/RGBW 4 Zones	-	3VDC (CR2032)	86x86x9,5mm
15.	85544 ■	RF RGB+CCT 4 Zones	-	3VDC (CR2032)	86x86x9,5mm

(((•))) RF



Control Tuya

	Code	Version	Power Max	VDC IN	Size
1.	22856 ☐	Controller Tuya/RF 5C	5Cx3A	12-24 VDC	114x38x20mm
2.	22821 ☐	Controller Push/Tuya RF 2C	2Cx5A	12-36 VDC	114x38x20mm
3.	22570 ☐	Controller Push/Tuya/RF 5C	5Cx6A	12-48 VDC	179x56x30mm
4.	22699 ☐ NEW	Controller Push/Tuya RF1C	1Cx10/15A	12-48 VDC	175x45x27mm

☒ RF

☐ PUSH





Mini controller Tuya/RF/Push

	Code	Version	Power Max	VDC IN	Size
1.	22571 ☐ NEW	Mini controller Tuya/RF/Push 1C	1C/5A	12-48 VDC	58X35,5X18mm
2.	22573 ☐ NEW	Mini controller Tuya/RF/Push 3C	3C/3A	12-24 VDC	58X35,5X18mm
3.	22575 ☐ NEW	Mini controller Tuya/RF/Push 5C	5C/2A	12-24 VDC	58X35,5X18mm

☐

☒ RF

☐ PUSH



Power Push/RF

	Code	Power	IP	VAC IN	VDC OUT	Size
1.	82440 ☐	40W	IP20	100-240 VAC	24 VDC	168x44x30mm
2.	82475 ☐	75W	IP20	200/240 VAC	24 VDC	179x56x30mm
3.	82415 ☐	150W	IP20	110-277 VAC	24 VDC	310x45x30mm

☐

☒ RF

☐ PUSH

Power Supplies Push/RF/Tuya

	Code	Power	IP	VAC IN	VDC OUT	Size
4.	97415 ☐	150W	IP20	100-277 VAC	24 VDC	310x45x30mm

☐


☒ RF

☐ PUSH







3 YEARS
WARRANTY

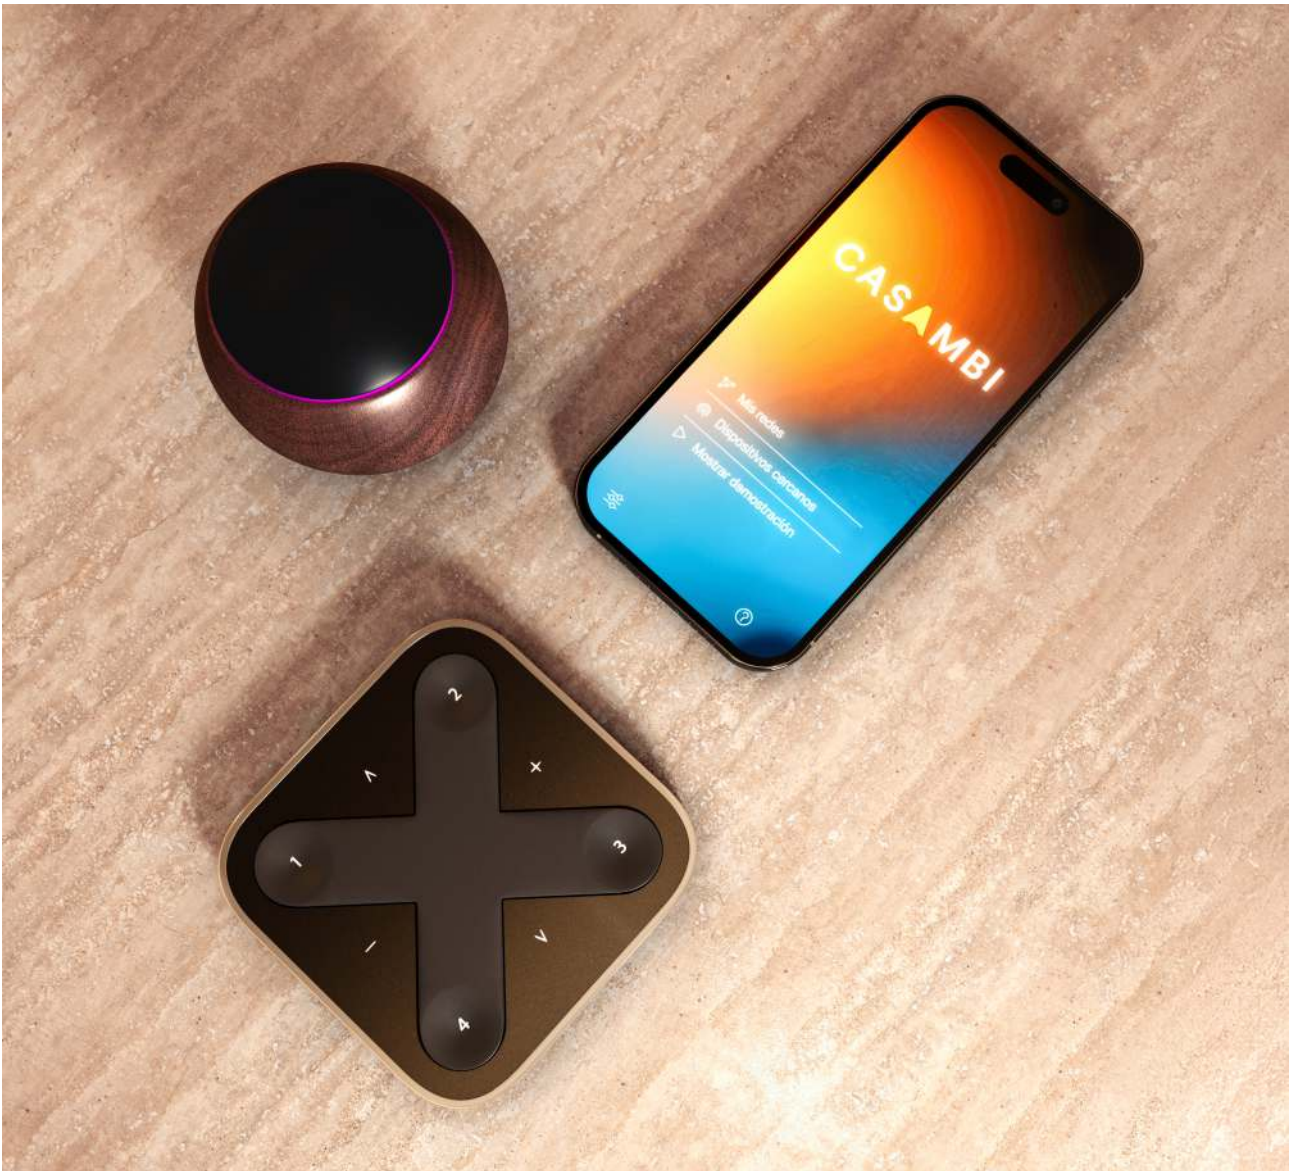

Control Casambi

	Code	Version	Power Max	VDC IN	Size
1.	59682	Touch Dimmer Casambi 4C Oak/Black	-	-	Ø73x62mm
2.	59689	Touch Dimmer Casambi 4C Oak/Silver	-	-	Ø73x62mm
3.	59182	Touch Dimmer Casambi 4C Mahogany/Black	-	-	Ø73x62mm
4.	59189	Touch Dimmer Casambi 4C Mahogany/Silver	-	-	Ø73x62mm





Control Casambi

	Code	Version	Power Max	VAC IN	Size
5.	59112 ■	Casambi Wall touch panel Black	-	-	146x90x24mm
6.	59847 ■	Casambi Touch Control (Includes 24VDC power supply and gateway code 57452)	-	220/230VAC	86x86x26mm
7.	57661 ■	Casambi Control 4 buttons + wheel	-	-	66x63mm
8.	59805 □ NEW	Casambi RF Control CCT+RGB 4 Zones	-	-	120x55x17mm
9.	59475 □ NEW	Casambi Touch Panel RGB+CCT White	-	-	86x86x26mm
10.	57241 □	Xpress Casambi White	-	-	90x90x12mm
11.	57242 ■	Xpress Casambi Black	-	-	90x90x12mm
12.	57299 □	Casambi Control On/Off, dimming, CCT, scene	-	-	134x36x9mm
13.	59121 □	Wall switch batteryfree 2C White	-	-	81x81x14mm
14.	59122 ■	Wall switch batteryfree 2C Anthracite	-	-	81x81x14mm
15.	59141 □	Wall switch batteryfree 4C White	-	-	81x81x14mm
16.	59142 ■	Wall switch batteryfree 4C Anthracite	-	-	81x81x14mm

CASAMBI



15.



16.



17.



18.



19.



20.



21.



22.



23.



24.



25.

Control Casambi

	Code	Version	Power Max	V IN	Size
15.	57924	Controller input 4 button Casambi	-	230 VAC	45x19x17mm
16.	59629	Smart Gateway Casambi	-	230 VAC	101x74x29mm
17.	59549	Led Strips regulator 5C Casambi/Push	5Cx5A	12-48V	186x29x21mm
18.	59733	Relay Casambi	10A	-	120x50 x32mm
19.	59777	Triac Dimmable Casambi/Push	-	-	Ø52x15,5mm
20.	59249	Control CBU-PWM4 long range	4Cx1,5A	12-24 VDC	72,6x30x18mm
21.	59739	Relay Casambi	10A	200-240 VAC	35x22x35mm
22.	59519	Led Strips regulator 1C Casambi/Push	12A	12-48V	44x57x19mm
23.	59769	Controller End of phase long range	0,43A	85-240 VAC	72,6x30x18mm
24.	59789	Interface 0-10/1-10 Dali long range	-	220-240 VAC	40,4x36,2x14mm
25.	57588	Controller PWM4+Push	4Cx5A	12-24 VDC	88x54x25mm

CASAMBI



Control Casambi

	Code	Version	Power Max	V IN	Size
26.	57881	Presence and illuminance mini sensor recessed White	0,4W	220/240 VAC	38X38X48mm
27.	57882	Presence and illuminance mini sensor recessed Black	0,4W	220/240 VAC	38X38X48mm
28.	57666	Presence and illuminance sensor recessed White	0,05A	100-240 VAC	79x85x85mm
29.	57662	Casambi Gateway 2 output 0-10V, 1-10V or 1 DALI	-	100-277 VAC	76x26x23mm
30.	59289	Led Strips regulator 2C Casambi/Push	10A	12-48 VDC	136x29x21mm
31.	57452	Casambi Gateway 45 profiles 8 groups / 8 scenes	-	100-254 VAC	57x44x25mm
32.	57400	Waterproof box 2XM20 for input and output. IP66	-	-	131x68x37mm
33.	57001	Timer Casambi	-	12-48 VDC	58x45x25mm
34.	57461 NEW	Casambi relay with switched phase	10A	100/240 VAC	44x57x25mm



3 YEARS WARRANTY | IP 20

This equipment connects to a DALI bus and allows you to view and control all DALI devices from the CASAMBI APP as if they were CASAMBI devices. Capable of controlling 16/32/64 drivers individually. Supports D4i, DT6 and DT8. Needs an external DALI power supply.

Este equipo se conecta a un bus DALI y permite ver y controlar desde la APP de CASAMBI todos los equipos DALI como si fuesen equipos CASAMBI. Capaz de controlar 16/32/64 drivers de forma individual. Soporta D4i, DT6 y DT8. Necesita fuente de alimentación DALI externa.



CASAMBI to DALI Gateway

Code		Version	Channels	VDC IN	Protocol	Size
59016	☐ NEW	Dali/Casambi Gateway	16CH	9,5/22,5 VDC	D4i-DT6-DT8	40,4x36,3x14mm
59032	☐ NEW	Dali/Casambi Gateway	32CH	9,5/22,5 VDC	D4i-DT6-DT8	40,4x36,3x14mm
59064	☐ NEW	Dali/Casambi Gateway	64CH	9,5/22,5 VDC	D4i-DT6-DT8	40,4x36,3x14mm



Este equipo se conecta a un bus DALI y permite ver y controlar desde la APP de CASAMBI todos los equipos DALI como si fuesen equipos CASAMBI. Capaz de controlar 16/32/64 drivers de forma individual. Soporta D4i, DT6 y DT8. Dispone de fuente DALI Integrada de 130mA. Incorpora reloj en tiempo real con pila para guardar la hora en caso de cortes de alimentación y protección anti-tirones del cableado.

This device connects to a DALI bus, allowing you to monitor and control all DALI units through the CASAMBI APP as if they were native Casambi devices. It is capable of controlling 16/32/64 drivers individually and supports D4i, DT6, and DT8 standards. It features an integrated 130mA DALI power supply. Additionally, it includes a battery-backed real-time clock (RTC) to maintain settings during power outages and built-in cable strain relief.



CASAMBI to DALI Gateway

Code		Version	Channels	VAC IN	Protocol	Size
59216	☐ NEW	Dali/Casambi Gateway	16CH	100-277 VAC	D4i-DT6-DT8	106x67x28mm
59232	☐ NEW	Dali/Casambi Gateway	32CH	100-277 VAC	D4i-DT6-DT8	106x67x28mm
59264	☐ NEW	Dali/Casambi Gateway	64CH	100-277 VAC	D4i-DT6-DT8	106x67x28mm






Control Casambi RF/Push

Code		Version	Power Max	VDC IN	Size
59020	☐ NEW	Controller Casambi RF/Push 2C	2C/5A	12-24 VDC	117X38X20mm

| RF | CASAMBI



Control Casambi RF

Code		Version	Power Max	VDC IN	Size
59050	☐ NEW	Controller Casambi RF 5C	5C/3A	12-24 VDC	117X38X20mm

RF | CASAMBI



Control Casambi Running SPI

Code		Version	Power Max	VDC IN	Size
59911	☒ NEW	Controller Casambi Running SPI	7A	5-12-24 VDC	136X29X21mm

| CASAMBI



Led Driver CC-Casambi

Code		Version	Power Max	VDC IN	VDC OUT	I OUT	Size
DR-H-42WCAS	☐ NEW	Led Driver CC-Casambi	42W	194-264 VAC	2,5-42 VDC	150-1.050mA	97X43X30mm

CASAMBI



3 YEARS WARRANTY | IP 20



Control Dali touch

Code	Version	Power Max	VDC IN	Size
29187 	Controller Dali DT8 2GR/10 scenes	10A	12-24 VDC	86X86X26mm



Control Dali

Code	Version	Power Max	VDC IN	Size
29276  NEW	Controller Dali DT8 RGB/RGBW/RGBWW	5x5A (12A Max)	10,8-52,8 VDC	186x29x21mm
29882  NEW	Controller Dali DT8 Monocolor/CCT	2x7A (10A Max)	12-24-48 VDC	137x29x21mm



Control Dali Push

Code	Version	Power Max	VDC IN	Size
29777 	Controller Dali 4CH	10A	12-24 VDC	88x54x26mm



Control Dali Push Triac

Code	Version	Power Max	VAC IN	Size
22948 	Controller Dali+Push/Triac	1,5A	100-240 VAC	187x46x22mm





DALI Bus Power Supply

Code	Version	Power Max	VAC IN	Size	
29261	NEW	DALI Bus Power Supply	15/18 VDC-240mA	90/264 VAC	145x38x22mm



Control Dali SPI APP

Code	Version	Power Max	VDC IN	Size
29735	Controller Dali SPI APP	7A	5-12-24 VDC	120x29x21mm



Control Driver RF / Push

	Code	Version	Power Max	VDC IN	Size	
1.	22911	☐	Controller 4CH RF Push	3-45 VDC/150-500mA	12-48 VDC	139x36x11mm
2.	22974	☐	Controller 4CH RF Push	3-45 VDC/350-1.200mA	12-48 VDC	138x50x22mm



Control Dali Push

	Code	Version	Power Max	VDC IN	Size
1.	22490 	Controller PWM Dali Push 1-10V	12A	12-24-48 VDC	155x51x26mm
2.	22499 	Controller PWM Dali Push 1-10V	5A	12-24-48 VDC	132x22x20mm



LED Strips accessories



Control Basic

	Code	Version	Power Max	VDC IN	Size
1.	90990	☐ RF Mono Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
2.	89260	☐ RF CCT Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
3.	88460	☐ RF RGB Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
4.	91430	☐ RF RGB-W Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
5.	86019	☐ Controller Mono/CCT/RGB Basic	3Cx5A	12-24 VDC	145x46x18mm
6.	87029	☐ Controller RGB-W Basic	5Cx5A	12-24 VDC	145x46x18mm

(((•))) RF



Control Top

	Code	Version	Power Max	VDC IN	Size
1.	81990	☒ RF Mono Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
2.	80260	☒ RF CCT Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
3.	79430	☒ RF RGB-W Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
4.	77019	☐ Controller Mono/CCT/RGB/RGB-W Top	4Cx5A	12-23 VDC / 5Ax4C	178x46x18mm
5.	82995	☐ RF Mono Button Panel Top	-	24 VDC	86x86x41mm
6.	83475	☒ RF RGB-W Button Panel Top Black	-	24 VDC	86x86x41mm
7.	83419	☐ RF RGB-W Button Panel Top White	-	24 VDC	86x86x41mm

(((•))) RF



3 YEARS WARRANTY | IP 20



Control Push / Triac

	Code	Version	Power Max	V IN	Size
1.	85890	RF Dimming	-	3 VDC (CR2032)	139x36x11mm
2.	85894	RF Dimming 4 Zones	-	3 VDC (CR2032)	138x50x22mm
3.	84431	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	84432	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
5.	85144	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
6.	85876	Controller Wifi RF Push Triac Tuya	1,5A	100-240 VAC	52x52x26mm
7.	85884	Controller RF Push Triac	2A	100-240 VAC	110x48x67mm




Control PMW / RF

	Code	Version	Power Max	VDC IN	Size
1.	85890	RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85894	RF Dimming 4 Zones	-	3VDC (CR2032)	138x50x22mm
3.	84431	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	84432	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
5.	85144	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
6.	22799	Controller Push/RF Progressive	8A	12-48 VDC	120x43x27mm
7.	22726	Control Push - Dim / RF	8A	5-36 VDC	97x33x18mm



3 YEARS WARRANTY | IP 20

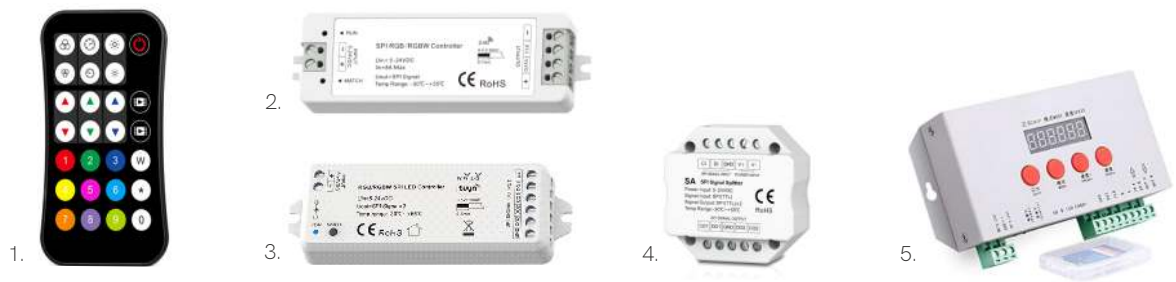

Control SPI/RF

	Code	Version	Power Max	Pixels Max	VDC IN	Size
1.	92353	SPI 1 Zone RGB/RGB-W Remote	-	-	3VDC (CR2032)	107x58,5x9mm
2.	92473	Controller SPI/RF (RGB/RGB-W)	8A	1.024	5-24 VDC	97x33x18mm
3.	92853	Controller SPI/Tuya/RF (RGB/RGB-W)	8A	1.000	5-24 VDC	114x38x20mm
4.	92553	SPI Signal Repeater	-	-	5-24 VDC	52x52x126mm
5.	92699	Controller SPI/Computer	-	2.048	5-24 VDC	159x89x24mm

| RF | SPI



Control DMX

	Code	Version	Power Max	V IN	Size
1.	96009	Controller DMX / Triac 2CH	2Cx1A	100-240 VAC	170x50x23mm
2.	93470	RF RGB-W DMX Touch Panel 4 Zone	-	100-240 VAC	86x86x33mm
3.	95153	Amplifier DMX 2CH	-	12-48 VDC	175x45x27mm
4.	93579	Decoder DMX 512 5CH	5Cx4A	12-48 VDC	175x46x24mm
5.	95479	Decoder DMX 512 4CH	4Cx5A	12-48 VDC	175x46x24mm
6.	95179	Decoder DMX 512 1CH	15A	12-24 VDC	170x50x23mm

DMX





Led Driver CC

	Code		Power Max	VDC IN	VDC OUT	I OUT	Size
1.	DR-H-21W	☐ NEW	21W	220-240 VAC	10-42 VDC	100-500mA	131x43x30mm
2.	DR-H-43W	☐ NEW	43W	220-240 VAC	9-40 VDC	300-1.050mA	131x43x30mm
3.	40807	☐ NEW	-	-	-	-	-

Led Driver Dali

	Code		Power Max	VDC IN	VDC OUT	I OUT	Size
3.	40807	☐ NEW	-	-	-	-	-
4.	DR-H42WDA	☐ NEW	42W	220-240 VAC	2,5-42 VDC	150-1.050mA	131x43x30mm



Led Driver CC Dali / Push

	Code		Power Max	VDC IN	VDC OUT	I OUT	Size
	CCT-10DA	☐	10W	100-277 VAC	3-42 VDC	100-450mA	135x30x20mm
	CCT-20DA	☐	20W	100-277 VAC	3-42 VDC	250-700mA	160x43x20mm
	CCT-40DA	☐	40W	100-277 VAC	3-65 VDC	300-1.400mA	172x54x20mm
	CCT-60DA	☐	60W	100-277 VAC	3-65 VDC	600- 2.100mA	192x62x24mm

Led Driver CC Triac

	Code		Power Max	VDC IN	VDC OUT	I OUT	Size
	CCT-10TR	☐	10W	220-240 VAC	3-42 VDC	100-450mA	135x30x20mm
	CCT-20TR	☐	20W	220-240 VAC	3-42 VDC	250-700mA	160x43x20mm
	CCT-40TR	☐	40W	220-240 VAC	3-65 VDC	300-1.400mA	172x54x20mm
	CCT-60TR	☐	60W	220-240 VAC	3-65 VDC	600- 2.100mA	192x62x24mm



3 YEARS WARRANTY | IP 20

Power Supplies 24V

Power Supplies Standard

Code		Power	IP	VAC IN	VDC OUT	Size
62430	☐	30W	IP20	198-264 VAC	24 VDC	162x42x30mm
62460	☐	60W	IP20	198-264 VAC	24 VDC	187x45x30mm
62475	☐	75W	IP20	198-264 VAC	24 VDC	187x45x30,5mm
62412	☐	120W	IP20	198-264 VAC	24 VDC	268x45x30,5mm
62415	☐	150W	IP20	198-264 VAC	24 VDC	268x45x30,5mm
62425	☐ NEW	250W	IP20	180-264 VAC	24 VDC	195x67,1x31,2mm
62432	☐ NEW	320W	IP20	198-264 VAC	24 VDC	215x77,5x35mm



Power Supplies Basic

Code		Power	IP	VAC IN	VDC OUT	Size
22420	☐	24W	IP67	176-264 VAC	24 VDC	110x40x30mm
22435	☐	40W	IP67	176-264 VAC	24 VDC	148x40x30mm
22460	☐	60W	IP67	176-264 VAC	24 VDC	162,5x42,5x32mm
22410	☐	100W	IP67	176-264 VAC	24 VDC	190x52x33mm



Power Supplies Top

Code		Power	IP	VAC IN	VDC OUT	Size
22415	☐	150W	IP67	90-264 VAC	24 VDC	191x63x37,5mm
22424	☐	240W	IP67	90-305 VAC	24 VDC	244,2x68x38,8mm
22430	☐	300W	IP67	90-305 VAC	24 VDC	246x77x39,5mm
22432	☐	320W	IP67	90-305 VAC	24 VDC	252x90x43,8mm



Power Supplies Slim

Code		Power	IP	VAC IN	VDC OUT	Size
TR3024	☐	30W	IP20	220-240V VAC	24 VDC	300x30x16mm
TR6024	☐	60W	IP20	220-240V VAC	24 VDC	300x30x16mm
TR10024	☐	100W	IP20	220-240V VAC	24 VDC	350X30X18mm
TR16024	☐	150W	IP20	220-240V VAC	24 VDC	350X30X18mm





Power Supplies Triac

Code		Power	IP	VAC IN	VDC OUT	Size
24609	☐	60W	IP20	200-240 VAC	24 VDC	178x61x24mm
24109	☒	100W	IP66	200-240 VAC	24 VDC	230x70x43mm
24159	☒	150W	IP66	200-240 VAC	24 VDC	256x78x47mm
24309	☒	300W	IP66	200-240 VAC	24 VDC	276x78x47mm
TR10024TR	☐	100W	IP20	200-240 VAC	24 VDC	330x30x22mm
TR15024TR	☐	150W	IP20	200-240 VAC	24 VDC	330x30x22mm



Power Supplies Dali-2 / Push

Code		Power	IP	VAC IN	VDC OUT	Size
64458	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64808	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64158	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
TR3024DA	☐	12-30W	IP20	200-240 VAC	24 VDC	300x30x16mm
TR6024DA	☐	60W	IP20	200-240 VAC	24 VDC	350x30x18mm
TR10024DA	☐	30-100W	IP20	200-240 VAC	24 VDC	350x30x18mm
TR15024DA	☐	45-150W	IP20	200-240 VAC	24 VDC	350x30x18mm



Power Supplies Push / Dali-2

Code		Power	IP	VAC IN	VDC OUT	Size
24758	☒	90W	IP67	100-305 VAC	24 VDC	180x63x35,5mm
24108	☒	120W	IP67	100-305 VAC	24 VDC	199x63x35,5mm
24208	☒	200W	IP67	100-305 VAC	24 VDC	219x63x35,5mm
24248	☒ NEW	240W	IP67	108-305 VAC	24 VDC	175x68x38,5mm
24308	☒	300W	IP66	110-277 VAC	24 VDC	301x78x25,1mm
24408	☒ NEW	400W	IP67	90-305 VAC	24 VDC	251x90x41,5mm
24508	☒ NEW	500W	IP67	176-305 VAC	24 VDC	251x90x41,5mm

*24758/ 24108 Only Dali




Power Supplies Dali-2 DT-8 / Push Dim - CCT

Code		Power	IP	VAC IN	VDC OUT	Size
64453	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64803	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64153	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm




PF >0,9 | 3 YEARS WARRANTY



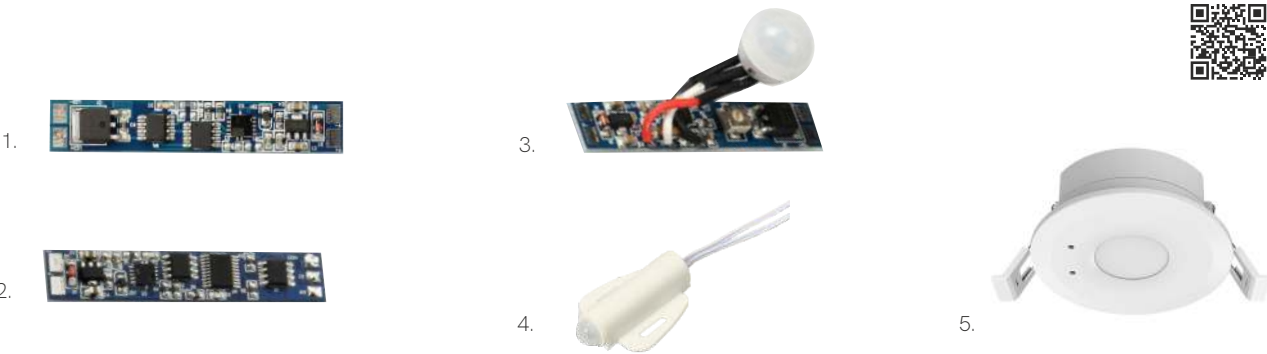

Motion Sensor

	Code	Version	Power Max	V IN	Size
1.	85993	■ Mini Sensor Mono PWM	6A	12-24 VDC	55x10mm
2.	85263	■ Mini Sensor CCT PWM	2Cx4A	12-24 VDC	55x10mm
3.	85183	■ Motion Sensor Pir	8A	12-24 VDC	55x10mm
4.	85332	○ Motion Sensor Surface Pir	4A	12-24 VDC	45x62mm
5.	85999	○ Microwave induction dimmer & switch	4A	100-240 VAC	95x40mm

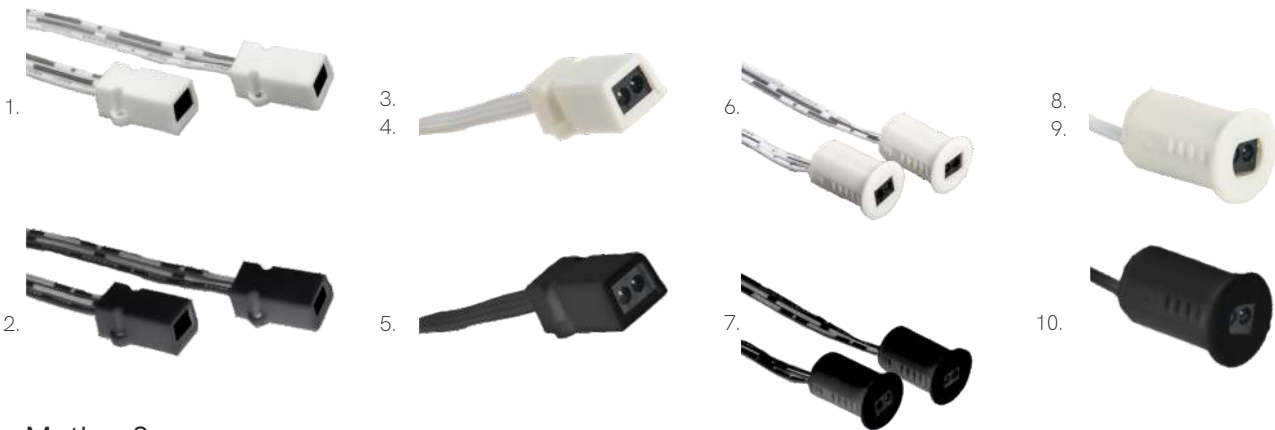

Motion Sensor

	Code	Version	Power Max	VDC IN	Size
1.	85220	□ Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
2.	85290	■ Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
3.	85120	□ Sensor Simple Surface door	4A	12-24 VDC	12x12mm
4.	85420	□ Sensor Simple Surface hand	4A	12-24 VDC	12x12mm
5.	85190	■ Sensor Simple Surface door	4A	12-24 VDC	12x12mm
6.	85626	○ Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
7.	85696	● Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
8.	85336	○ Sensor Simple Recessed door	4A	12-24 VDC	14x18mm
9.	85330	○ Sensor Simple Recessed hand	4A	12-24 VDC	14x18mm
10.	85396	● Sensor Simple Recessed door	4A	12-24 VDC	14x18mm







Three phase track



Three phase track surface accessories

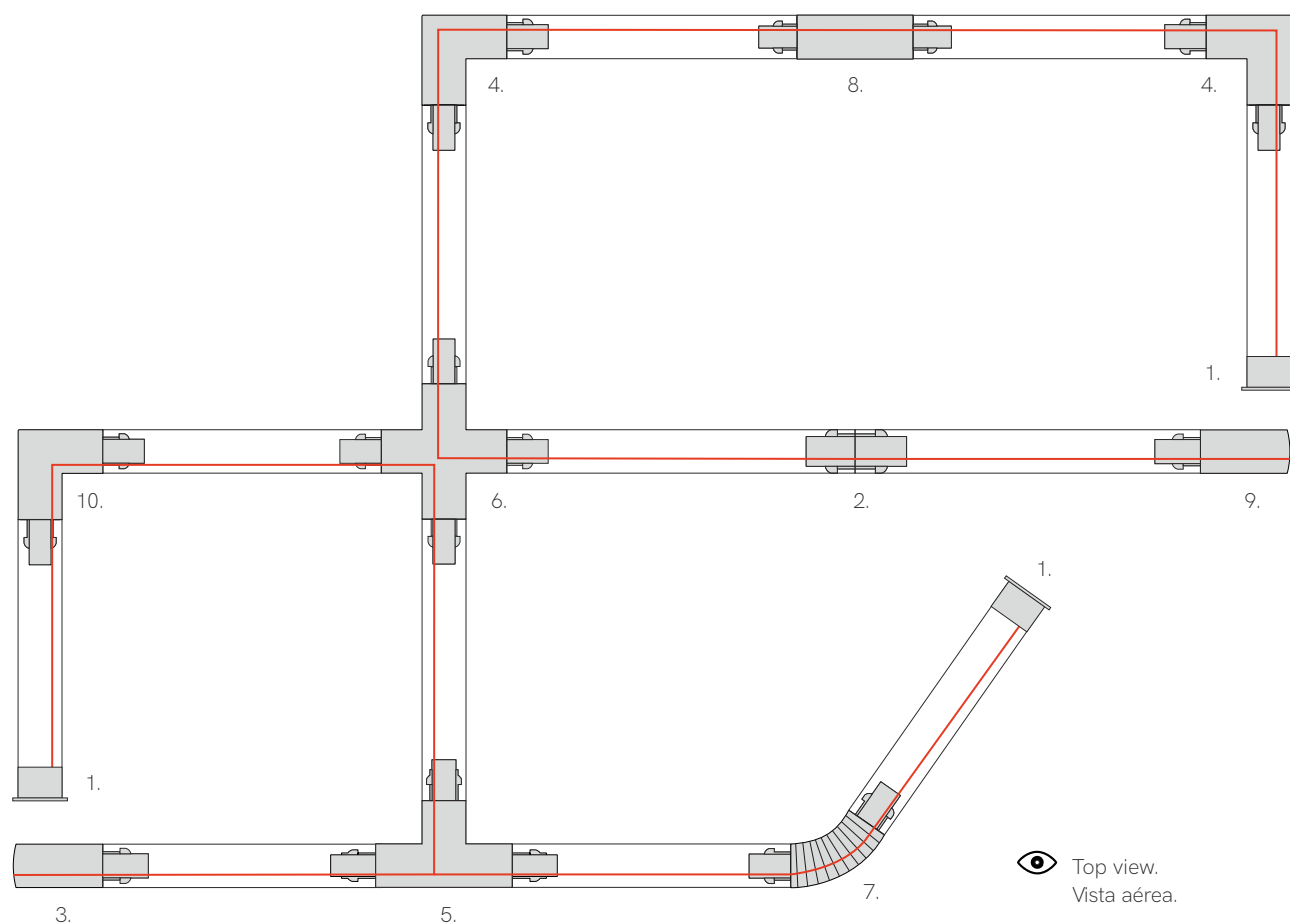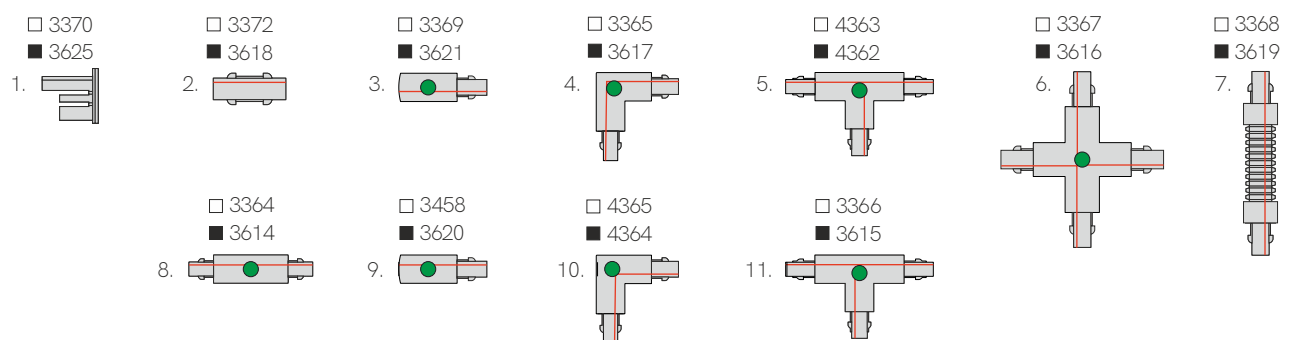

● Allows power input



*End cap and right power connector included

Three phase track surface

W: 32mm H: 31mm

☐ 1m 3795

☐ 2m 3796

☐ 3m 3797

☒ 1m D-3626

☒ 2m D-3627

☒ 3m D-3628



Ceiling fixing 3PH surface

L: 30mm W: 25mm H: 12mm

☐ 3373

☒ 3623



Power connector 3PH surface

L: 98mm W: 32mm H: 32mm

☐ Left 3369

☐ Right 3458

☒ Left 3621

☒ Right 3620



Linear joint 3PH without spacing

L: 68mm W: 25mm H: 27mm

☐ 3372

☒ 3618



Linear joint 3PH with spacing surface

L: 166mm W: 35mm H: 32mm

☐ 3364

☒ 3614



L joint 90° 3PH surface

L: 100mm W: 66mm H: 32mm

☐ Left 4365

☐ Right 3365

☒ Left 4364

☒ Right 3617



T joint 3PH surface

L: 166mm W: 100mm H: 32mm

☐ Left 4363

☐ Right 3366

☒ Left 4362

☒ Right 3615



X joint 3PH surface

L: 166mm W: 166mm H: 32mm

☐ 3367

☒ 3616



Flexible joint 3PH

L: 245mm W: 35mm H: 32mm

☐ 3368

☒ 3619



End cap 3PH

L: 32mm W: 32mm H: 32mm

☐ 3370

☒ 3625



Adapter 3PH

L: 70mm W: 40mm H: 41mm

☐ 3371-V2

☒ 3624-V2



Suspension kit 3PH

L: 3.000mm W: Ø35 | Ø2.4 H: 47mm

☐ 3459

☒ 3622



Surface base 3PH

L: Ø100mm H: 32mm

☐ 4700

☒ 4701

Surface





Common



Base



Three phase track recessed accessories

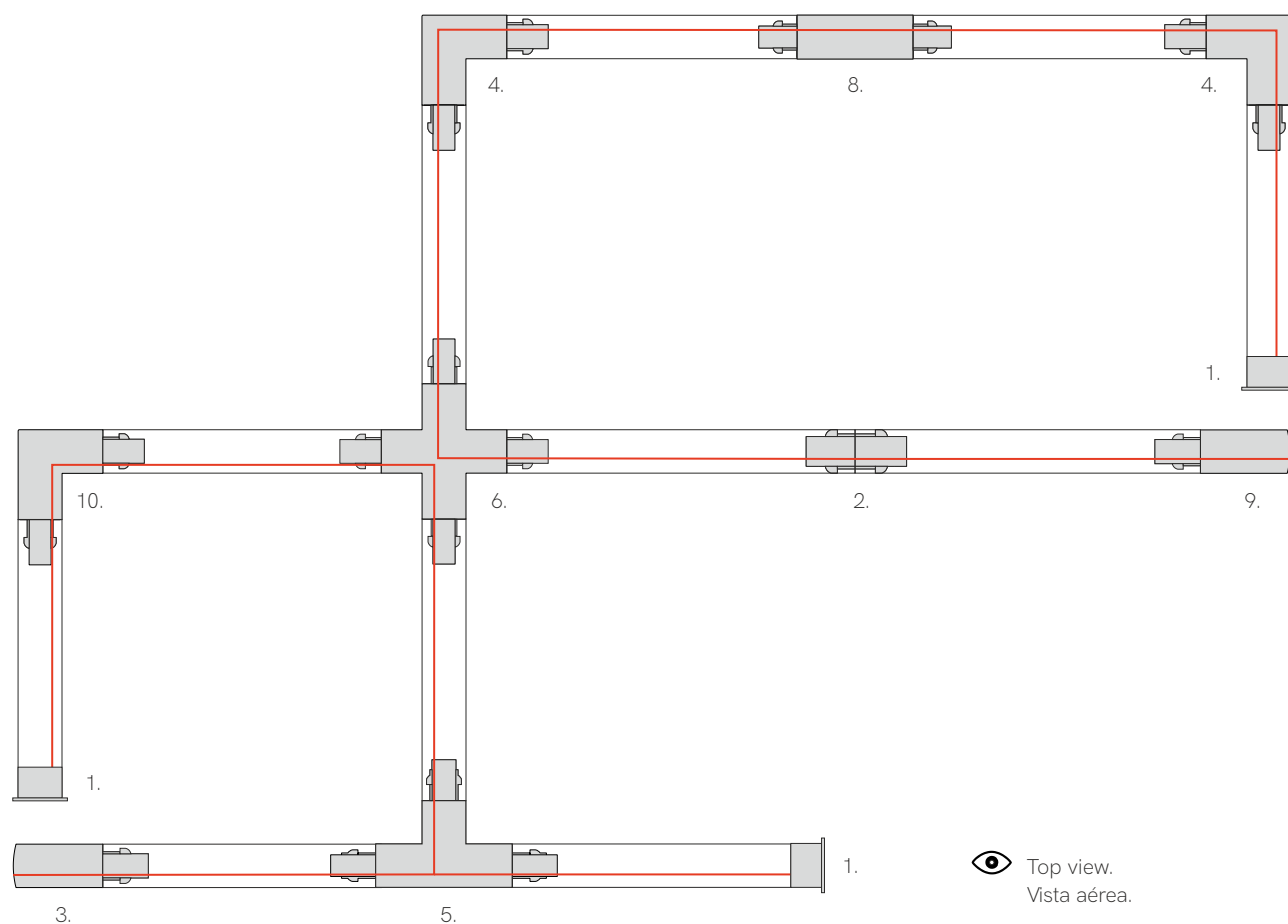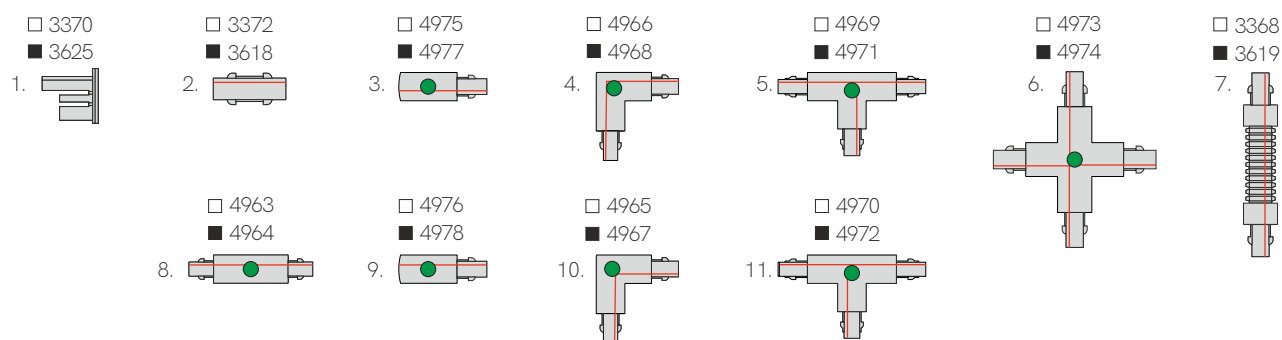

● Allows power input



*End cap and right power connector included

Three phase track recessed

W: 56mm H: 33mm

☐ 2m 3897

☐ 3m 3898

☒ 2m 4753

☒ 3m 4754



Ceiling fixing 3PH recessed

L: 64mm W: 25mm H: 32mm

☒ 3805



Power connector 3PH recessed

L: 98mm W: 56,5mm H: 33,7mm

☐ Left 4975

☐ Right 4976

☒ Left 4977

☒ Right 4978



Linear joint 3PH without spacing

L: 68mm W: 25mm H: 27mm

☐ 3372

☒ 3618



Linear joint 3PH with spacing recessed

L: 166mm W: 56,5mm H: 33,7mm

☐ 4963

☒ 4964



Flexible joint 3PH

L: 245mm W: 35mm H: 32mm

☐ 3368

☒ 3619



L joint 3PH recessed


L: 111mm W: 111mm H: 33,7mm

☐ Left 4965

☐ Right 4966

☒ Left 4967

☒ Right 4968



T joint 3PH recessed

L: 166mm W: 111mm H: 33,7mm

☐ Left 4969

☐ Right 4970

☒ Left 4971

☒ Right 4972



X joint 3PH recessed

L: 166mm W: 166mm H: 33,7mm

☐ 4973

☒ 4974



End cap 3PH

L: 32mm W: 32mm H: 32mm

☐ 3370

☒ 3625



Adapter 3PH

L: 70mm W: 40mm H: 41mm

☐ 3371-V2

☒ 3624-V2



Recessed base 3PH

L: Ø130mm H: 60mm  Ø110mm

☐ 3851

☒ 3852

*Need Three Phase Surface Base (4700 or 4701) to put inside.

Recessed



Common



Base




New

Nano Alp 3PH
suspension



Alp 3PH suspension



Technical Information

Power	5W	5W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm	370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 190S11 ON/OFF ☒ 190S12 ON/OFF ☐ 190S41 TRIAC ☒ 190S42 TRIAC	☐ 191S11 ON/OFF ☒ 191S12 ON/OFF ☐ 191S41 TRIAC ☒ 191S42 TRIAC

☐

191S11 ON/OFF


☒

191S12 ON/OFF

☐

191S41 TRIAC

☒

191S42 TRIAC

ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

30.000
HOURS

IP
20

220/240
VAC

UGR
<19

PF
>0,9

CRI
≥93

45°

50/60
Hz

+45°C
-20°C

CCT
SWITCH

1/60

New

Ark 3PH suspension




Black-gray



Black-transparent.



White-transparent.




Technical Information

Power	6W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K
Lumens	350 lm / 360 lm
Material	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray

Code	198211	ON/ OFF		White-transparent. 2.700K
	198311	ON/ OFF		White-transparent. 3.000K
	198212	ON/ OFF		Black-transparent. 2.700K
	198312	ON/ OFF		Black-transparent. 3.000K
	198219	ON/ OFF		Black-gray 2.700K
	198319	ON/ OFF		Black-gray 3.000K

199241	TRIAC		White-transparent. 2.700K
199341	TRIAC		White-transparent. 3.000K
199242	TRIAC		Black-transparent. 2.700K
199342	TRIAC		Black-transparent. 3.000K
199249	TRIAC		Black-gray 2.700K
199349	TRIAC		Black-gray 3.000K



3 YEARS WARRANTY

26.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥90

90°


50/60 Hz

+40°C
-20°C


1/12

New

Atmos 3PH suspension



Atmos XL 3PH suspension



Technical Information

Power	7W	10W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 313S11 ON/OFF	☐ 314S11 ON/OFF
	☒ 313S12 ON/OFF	☒ 314S12 ON/OFF
	☐ 313S41 TRIAC	☐ 314S41 TRIAC
	☒ 313S42 TRIAC	☒ 314S42 TRIAC
1/8		1/4

ⓘ Consult delivery terms and conditions.


Accessories



Included with:
313S11 / 313S41 / 314S11 / 314S41



Included with:
313S12 / 313S42 / 314S12 / 314S42



3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥90


50/60 Hz

+50°C
-20°C


CCT SWITCH

New

Atmos GU10 3PH
suspension



Atmos GU10 XL 3PH
suspension



Technical Information

Installation	Three Phase Track	Three Phase Track
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)
Code	○ 315011	○ 316011
	● 315012	● 316012
1/8		1/4

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | 220/240 VAC |

New

Bora 3PH suspension



Bora XL 3PH suspension




Technical Information

Power	8W	15W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 192S11 ON/OFF ☒ 192S12 ON /OFF ☐ 192S41 TRIAC ☒ 192S42 TRIAC	☐ 193S11 ON/OFF ☒ 193S12 ON /OFF ☐ 193S41 TRIAC ☒ 193S42 TRIAC

1/30

1/20




ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C / -20°C | CCT SWITCH

New

Lievo 3PH suspension



Lievo XL 3PH suspension



TRACK LIGHTS




Technical Information

Power	8W	15W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
V / I in	20-55VDC/150mA	20-42VDC/350mA
Code	☐ 194S11 ON/OFF	☐ 195S11 ON/OFF
	☒ 194S12 ON /OFF	☒ 195S12 ON /OFF
	☐ 194S41 TRIAC	☐ 195S41 TRIAC
	☒ 192S42 TRIAC	☒ 195S42 TRIAC

1/30

1/12



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥93

38°

50/60 Hz

+45°C

-20°C

CCT SWITCH




▶ VIDEO




New

Zoe 3PH suspension



Zoe XL 3PH suspension



Technical Information

Power	8W	15W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black


Code	△	196S11	ON/OFF
	▲	196S12	ON /OFF
	△	196S41	TRIAC
	▲	196S42	TRIAC
	△	197S11	ON/OFF
	▲	197S12	ON /OFF
	△	197S41	TRIAC
	▲	197S42	TRIAC

1/30


1/12

New

Mini Hat 3PH suspension




Hat 3PH suspension



Technical Information

Power	8W	8W
Installation	Three Phase Track	Three Phase Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	800lm	835 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○ 2.700K ON/OFF	311211	○ 2.700K ON/OFF	312211
	○ 3.000K ON/OFF	311311	○ 3.000K ON/OFF	312311
	● 2.700K ON/OFF	311212	● 2.700K ON/OFF	312212
	● 3.000K ON/OFF	311312	● 3.000K ON/OFF	312312
	○ 2.700K TRIAC	311241	○ 2.700K TRIAC	312241
	○ 3.000K TRIAC	311341	○ 3.000K TRIAC	312341
	● 2.700K TRIAC	311242	● 2.700K TRIAC	312242
	● 3.000K TRIAC	311342	● 3.000K TRIAC	312342



3 YEARS WARRANTY

30.000 HOURS

IP 20


220/240 VAC

PF >0,9

50/60 Hz

New

Cookie 3PH suspension




Technical Information

Power	12W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 310S11 ON/OFF
	☒ 310S12 ON /OFF
	☐ 310S41 TRIAC
	☒ 310S42 TRIAC

New


Sphere 3PH suspension



Technical Information

Power	8W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K
Lumens	255 lm
Material	Aluminium and glass
Finishes	White / Black

Code	○	2.700K ON/OFF	317211
	○	3.000K ON/OFF	317311
	●	2.700K ON/OFF	317212
	●	3.000K ON/OFF	317312
	○	2.700K TRIAC	317241
	○	3.000K TRIAC	317341
	●	2.700K TRIAC	317242
	●	3.000K TRIAC	317342



3 YEARS WARRANTY

30.000 HOURS

IP 20


220/240 VAC

UGR <19

360°

1/12


Piccolo 3PH



Technical Information

Power	9,5W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 4437-N
	☐ 4438-N
	☒ Custom RAL




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY	30.000 HOURS	IP 20	220/240 VAC	UGR <19	PF >0,9	CRI ≥90		50/60 Hz		CCT SWITCH	1/20
---------------------	-----------------	----------	----------------	------------	------------	------------	--	-------------	--	---------------	------




Piccolo GU10 3PH





Piccolo AR111 3PH





GU10



AR111



Technical Information

Installation	Three Phase Track	Three Phase Track
Material	Aluminium	Aluminium
Finishes	White / Black	White
Bulbholder	50mm GU10 (except Power bulb)	111mm GU10
Code	○ 3990-V3 ● 3989-V3 ①  Custom RAL 3 YEARS WARRANTY  1/20	○ 4435 ①  Custom RAL 5 YEARS WARRANTY  1/40

① Consult delivery terms and conditions.

Accessories



Recessed base (not included)

○

 4835

●

 4836


CE RoHS 

*GU10 bulbholder included.

IP 20 | 220/240 VAC | 




Cookie 3PH



Technical Information

Power	12W
Installation	Threese Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black
Code	5179 5180



3 YEARS
WARRANTY

30.000
HOURS

IP
20

220/240
VAC

UGR
<19

PF
>0,9

CRI
≥90

38°

50/60
Hz

TRIAC DIMM

+40°C
-20°C

CCT
SWITCH

1/20




► VIDEO



New

Oculum 3PH



Technical Information

Power	15W / 25W
Lumens	1.628 lm - 2.625 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)

Code		Diffuser (Angle)	Power		CCT (Lm)	Driver		Colour	
Code	7	Narrow (15°) N	15W	8	2.700K (95 lm/W) 2	On/Off	1	○ White	1
		Spot (22°) S	25W	9	3.000K (100 lm/W) 3	Triac	4	● Black	2
		Medium (36°) M			4.000K (105 lm/W) 4				
		Eliptic (30°-60°) E							

Code: 7 6

*Create your code according to your preferences.

ⓘ Consult delivery terms and conditions.

Accessories



Honeycomb Snoot anti-glare
● 20811




Oval diffuser
● 20833



Snoot
● 20855




Wallwasher
● 20877

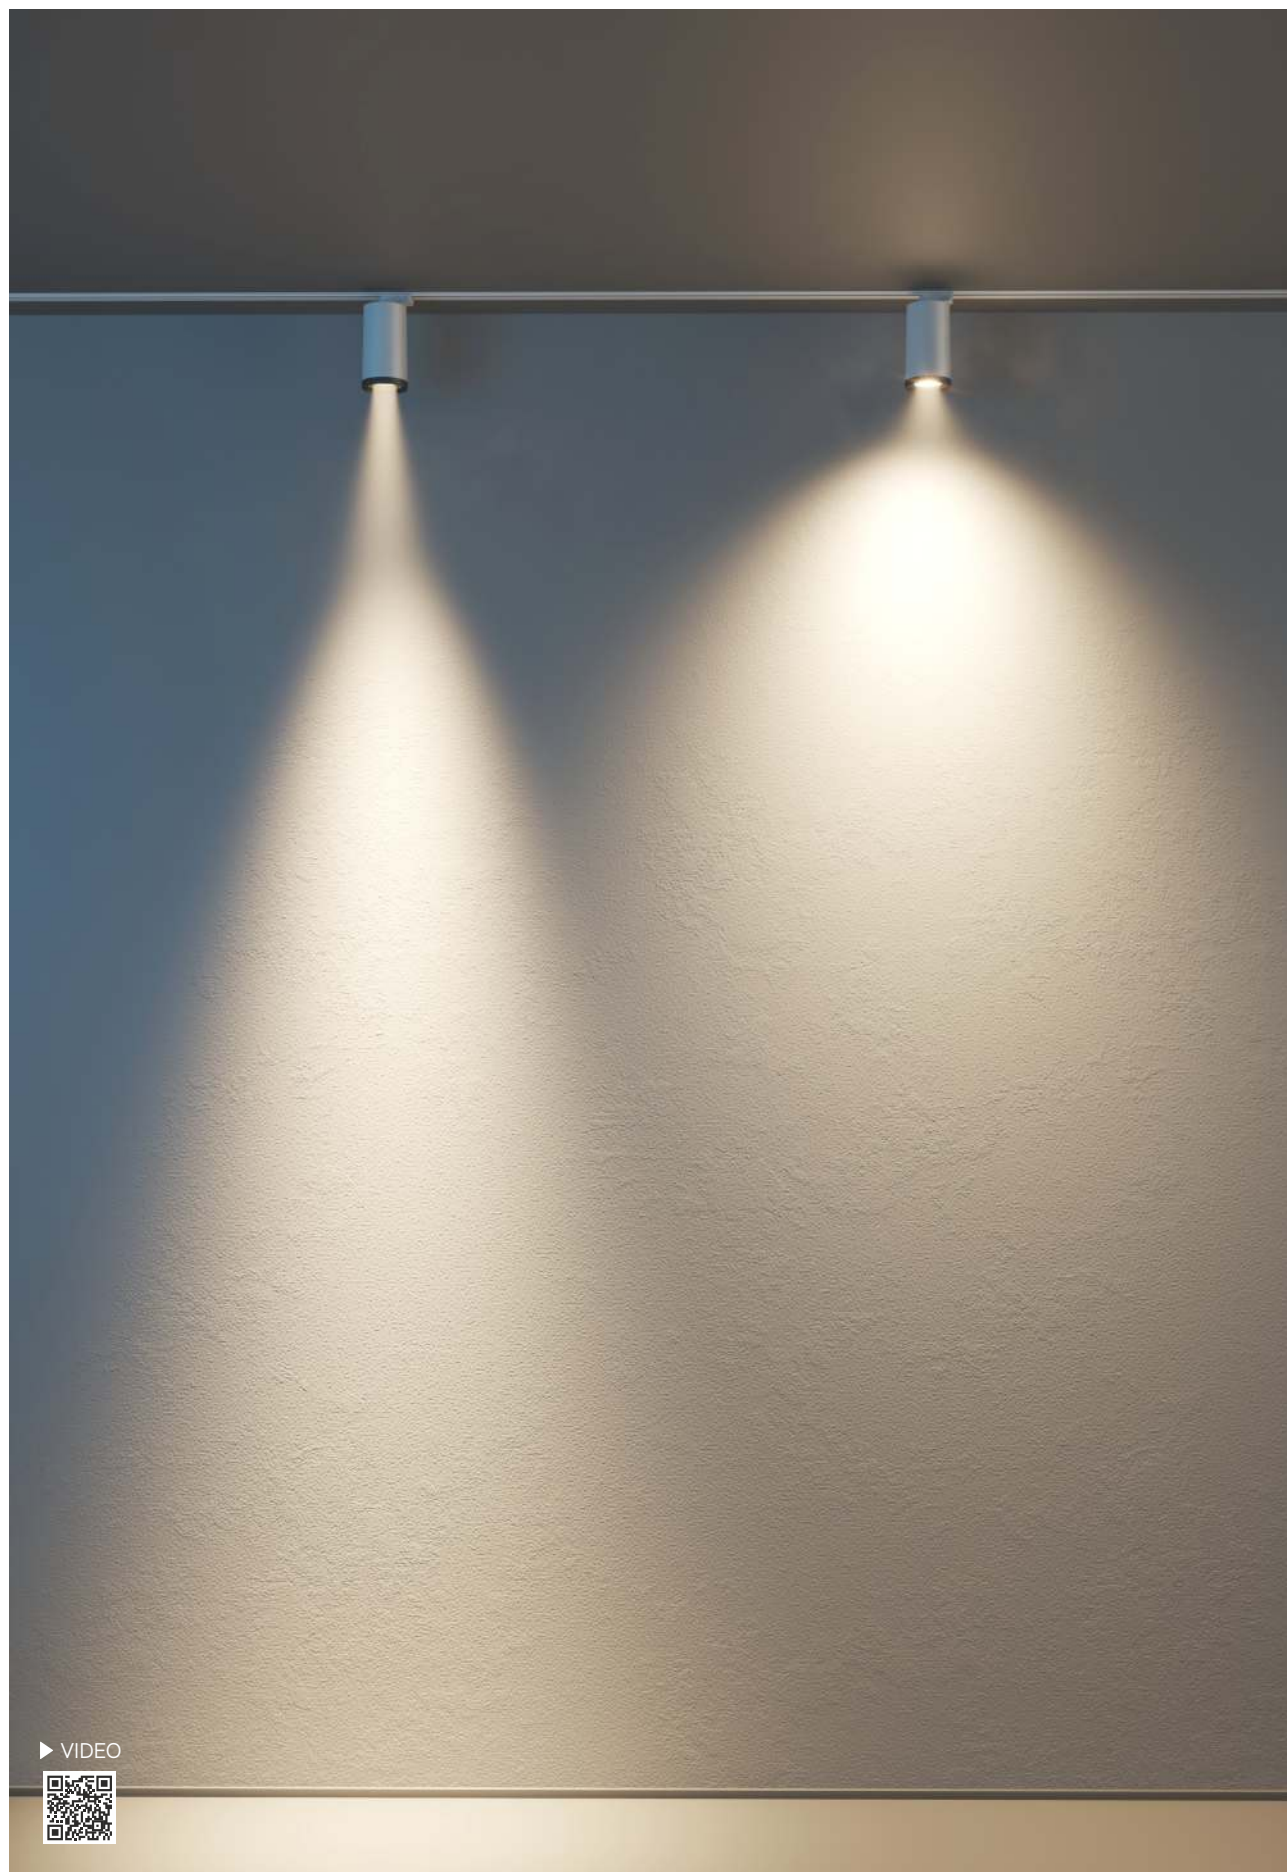




Power and CTT switch



Technical Information

Power	Switch 15W / 20W / 25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	15W: 1.200 lm / 20W: 1.500lm / 25W: 1.800 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	○ 4900 ● 4901



ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

30.000
HOURS

IP
20

220/240
VAC

UGR
<19

PF
>0,9

CRI
≥90



15° - 55°



50/60
Hz



IK06



+45°C
-20°C




CCT
SWITCH




POWER
SWITCH

1/10

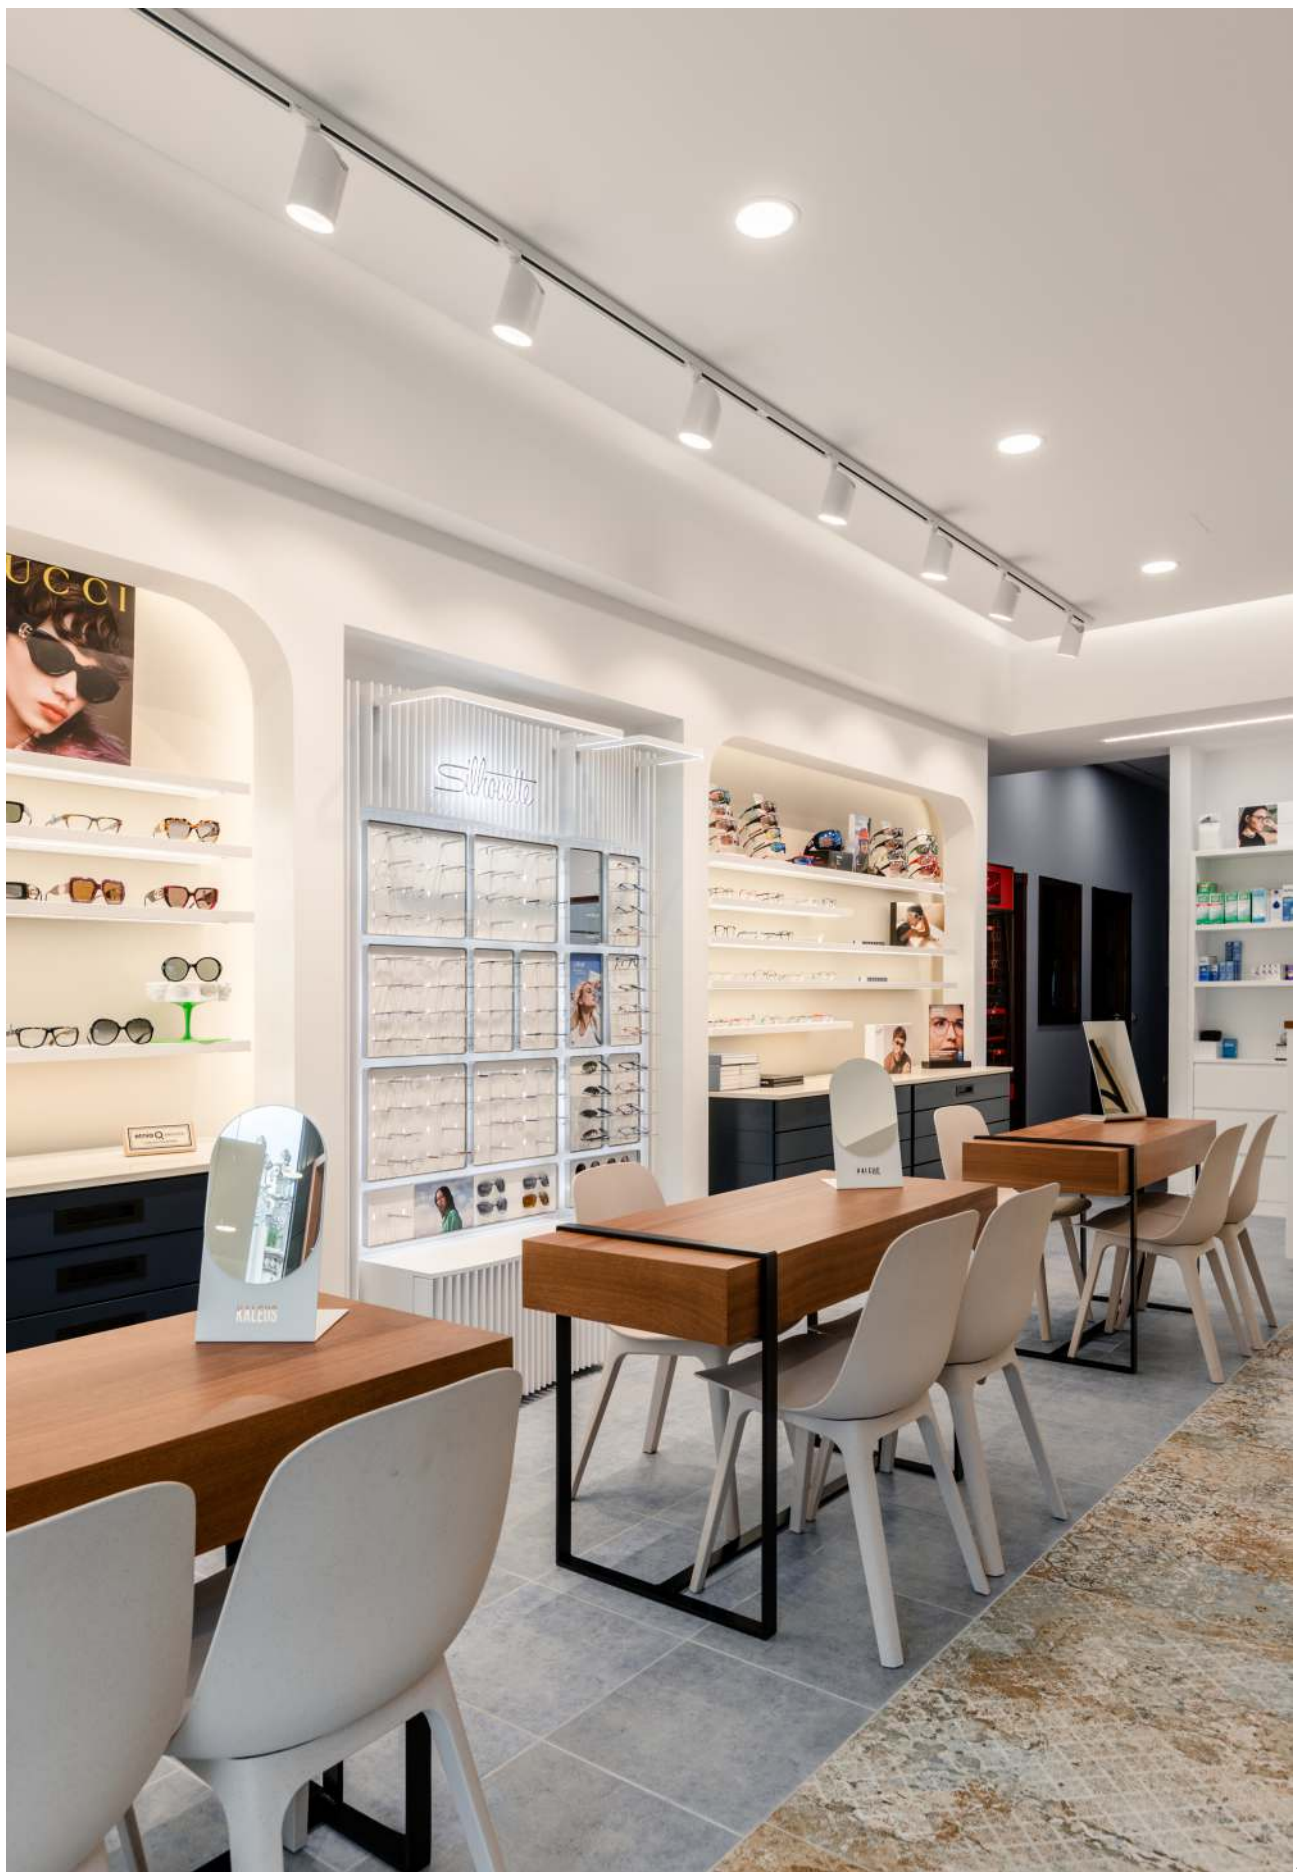


Óptica Rapp, La Laguna, Tenerife (Spain). Design: Grupo Globarq. Photography: Kuo estudio.

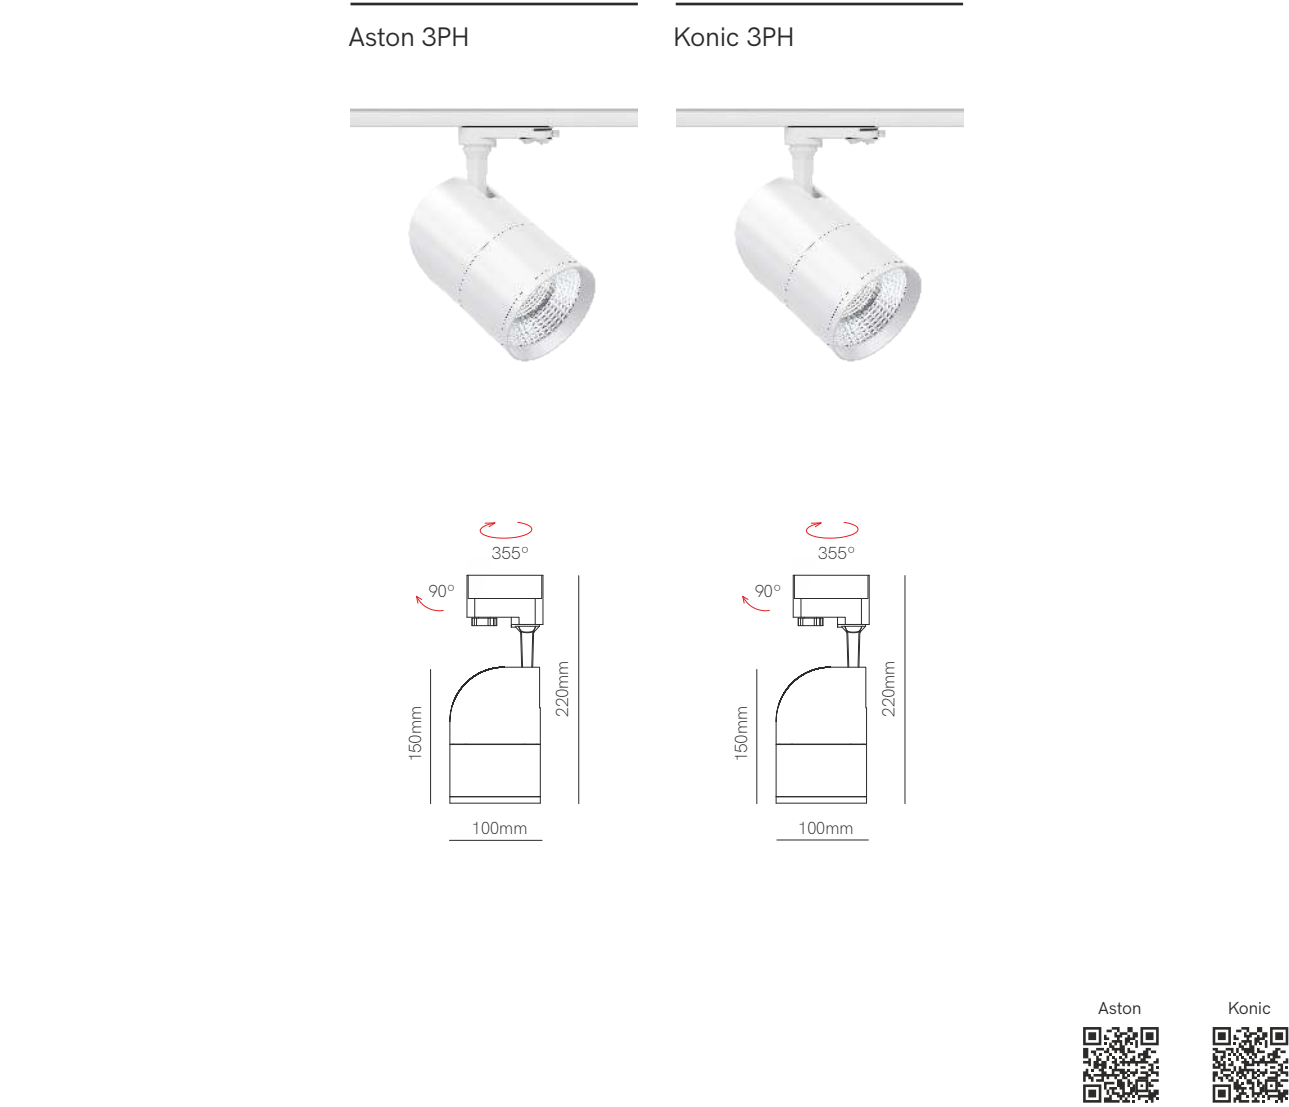

Technical Information

Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	2.440 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4439-N	☐ 4985-N
	☒ 4440-N	☒ 4986-N
	☒ Custom RAL	☒ Custom RAL
CRI ≥90		CRI ≥94 TRIAC DIMM

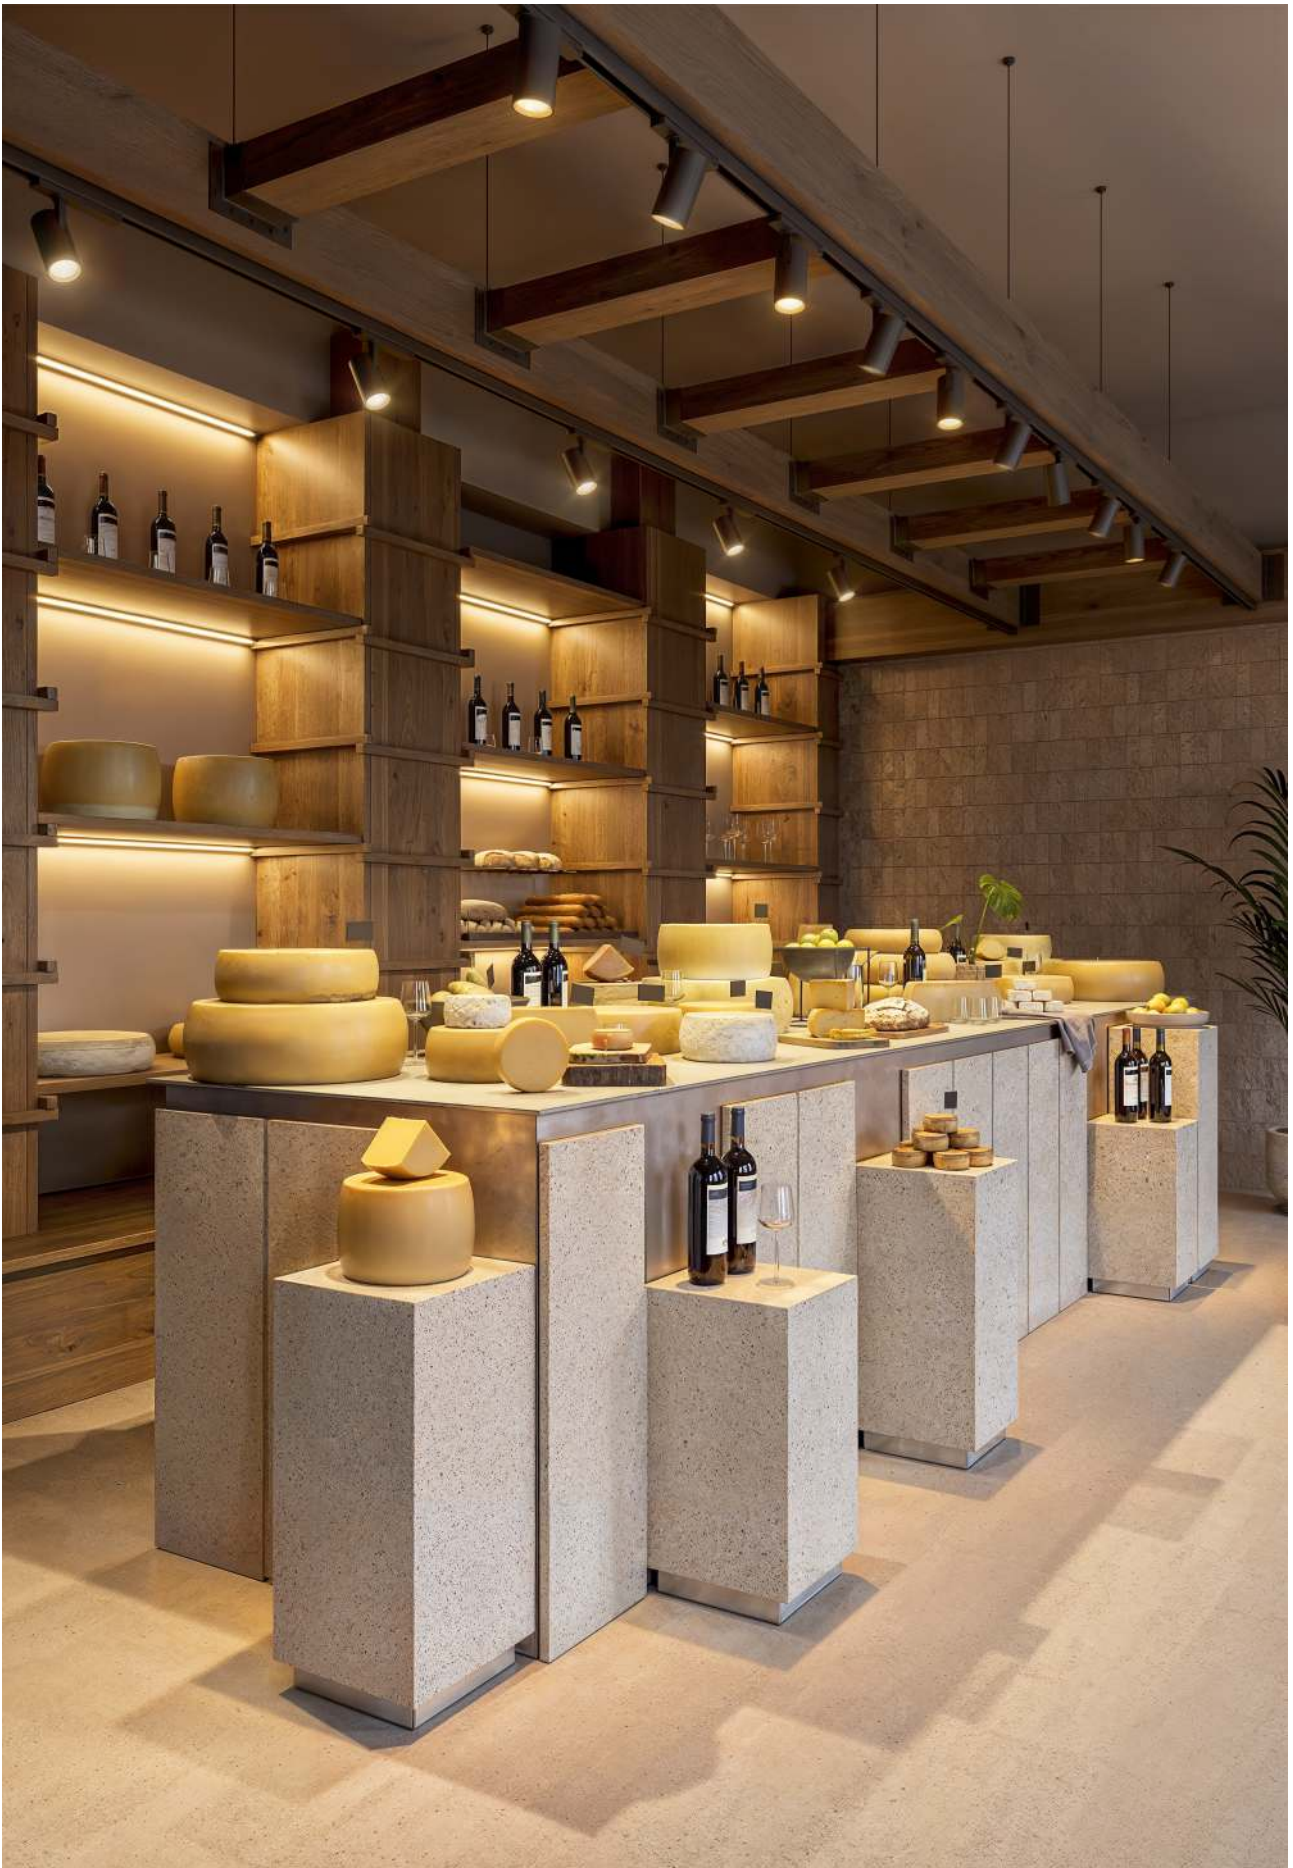

Lonja 3PH



Technical Information

Power	22W
Lumens	1.628 lm - 2.662 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)


Code	Diffuser (Angle)	Size	CCT (Lm)	Driver	Colour
Code 3	Transparent (15°)	1	FISH - 5.500K (121 lm/w)	On/Off 1	○ White 1
	Transparent (24°)	6	3.000K (95 lm/w)	Triac 4	● Black 2
	Transparent (36°)	8	4.000K (100 lm/w)		① Custom RAL
			MEAT R - 1.950K (75 lm/w)		
			FRUIT - 2.700K (105 lm/w)		
			WINE/CHEESE - 2.700K (112 lm/w)		
			BREAD - 2.400K (112 lm/w)		
			MEAT M - 3.500K (74 lm/w)		

Code: 3 9

*Create your code according to your preferences.

① Consult delivery terms and conditions.

Accessories



5 YEARS WARRANTY

50.000 HOURS

IP 40

220/240 VAC

PF >0,9

3.000K 4.000K

50/60 Hz

TRIAC DIMM

+40°C -15°C

1




► VIDEO



New

Lonja XL 3PH



Technical Information


Power	35W / 45W (Triac)
Lumens	2.450 lm - 5.265 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)

Code	Diffuser (Angle)	Size	CCT (Lm)	Driver	Colour
Code 3	Narrow (15°) N	7	FISH - 5.500K (117 lm/w) 1	On/Off (45W) 1	○ White 1
	Spot (24°) S		2.700K (95 lm/w) 2	Triac (only 35W) 4	● Black 2
	Medium (40°) M		3.000K (100 lm/w) 3		① 🌈 Custom RAL
	Wide (60°) W		4.000K (105 lm/w) 4		
			① MEAT R - 1.950K (70 lm/w) 5		
			① FRUIT - 2.700K (100 lm/w) 6		
			① BREAD - 2.400K (107 lm/w) 8		

Code: 3 7




Lena 3PH

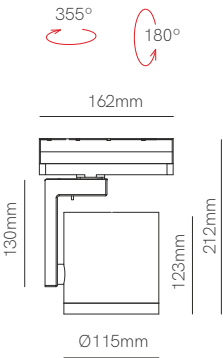

Technical Information

Power	35W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	4.200 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 4449-V3
	☐ 4450-V3
	☒ Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

PF >0,9

15° 38° 60°



50/60 Hz

+50°C -20°C

1/8




Crown 3PH




Technical Information

Power	25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.300 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	5221 5222







Kom 3PH 20W



Kom 3PH 30W



Kom 3PH 40W




Technical Information

Power	20W	30W	40W
Installation	Three Phase Track	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	2.300 lm	2.470 lm	4.500 lm / 4.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	 4337-N  4339-N  Custom RAL   SWITCH	 4336-N  4338-N  Custom RAL   SWITCH	 3.000K 4444  4.000K 4445  3.000K 4447  4.000K 4448  Custom RAL 



CRI
>80




 Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS |  →  | IP 20 | 220/240 VAC | UGR <19 | PF >0.9 |  | 15° 24° 40° | 50/60 Hz |  +50°C -20°C | 




Alfa 3PH



Technical Information


Power	32W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	3.100 lm / 3.200 lm / 3.250 lm
Material	Aluminium
Finishes	White / Black

Code	☐	2.700K	4038
	☐	3.000K	4039
	☐	4.000K	4040
	☒	2.700K	4176
	☒	3.000K	4177
	☒	4.000K	4178



5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 |  | 45°  | 50/60 Hz |  +40°C / -10°C | AKZO NOBEL |  1/10



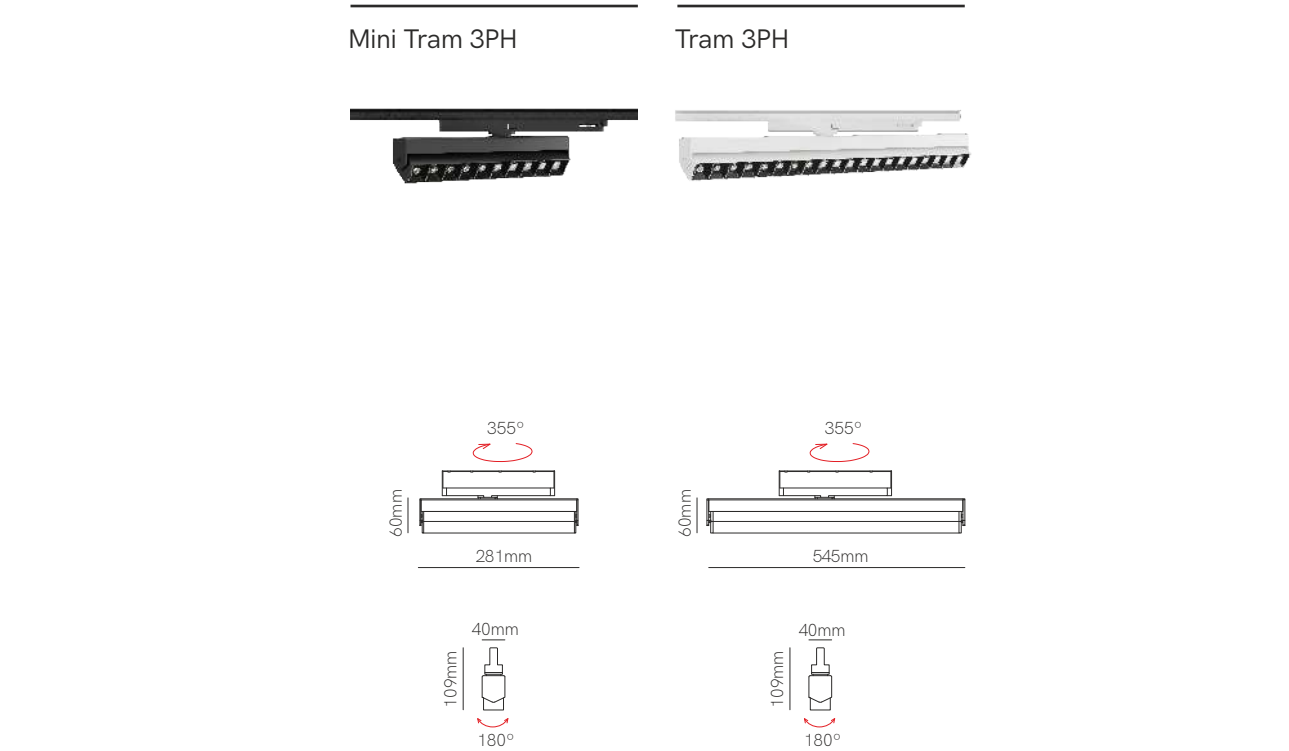

Technical Information


Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	2.320 lm / 2.400 lm	3.520 lm / 3.600 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 3.000K 4427	☐ 3.000K 4541
	☐ 4.000K 4428	☐ 4.000K 4542
	☒ 3.000K 4429	☒ 3.000K 4543
	☒ 4.000K 4430	☒ 4.000K 4544
5 YEARS WARRANTY		3 YEARS WARRANTY




ÚNICO ICÓNICO & CO Gallery, Barcelona (Spain). Photography: Pepo Úbeda.

Sono 3PH









Sono XL 3PH









*Need Tuya Smart App to work.



Technical Information

Power	40W	60W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.130 lm	4.390 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	☐ 4946 ☐ 4947  Custom RAL	☐ 4950 ☐ 4951  Custom RAL

 Consult delivery terms and conditions.

Accessories



Gateway Wifi 

☐ 4956

*See page 324 for Gateway additional info.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9





30° 

50/60 Hz



 +45°C
-15°C









► VIDEO




Magnet track mini





Magnet track

48V mini

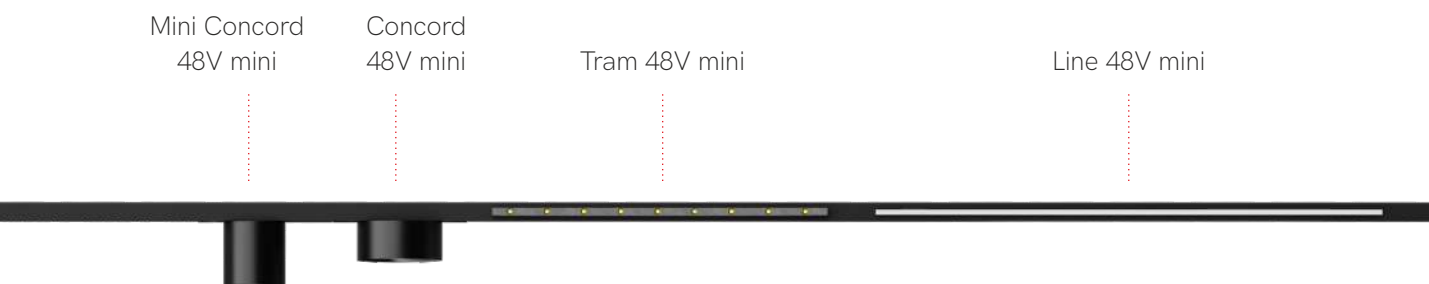


Beneito Faure introduces the mini magnetic track, developed to offer a punctual and decorative lighting in interior rooms. Its small size design makes it an ideal solution for domestic and decorative environments that need to highlight specific elements without interfering with the design of the space. The new collection includes a wide variety of products that are integrated into the track and switch on by magnetization on contact, guaranteeing a focused light emission at short angles, ideal for projects that require maximum precision.

Beneito Faure presenta el carril magnético mini, desarrollado para ofrecer una iluminación puntual y decorativa en estancias interiores. Su diseño de tamaño reducido lo convierte en una solución idónea para entornos domésticos y decorativos que necesitan resaltar elementos específicos sin interferir en el diseño del espacio.

La nueva colección incluye una amplia variedad de productos que se integran en el carril y se encienden por imantación al contactarlo, garantizando una emisión de luz focalizada con ángulos cortos, ideal para proyectos que exigen máxima precisión.

Magnet track mini accessories

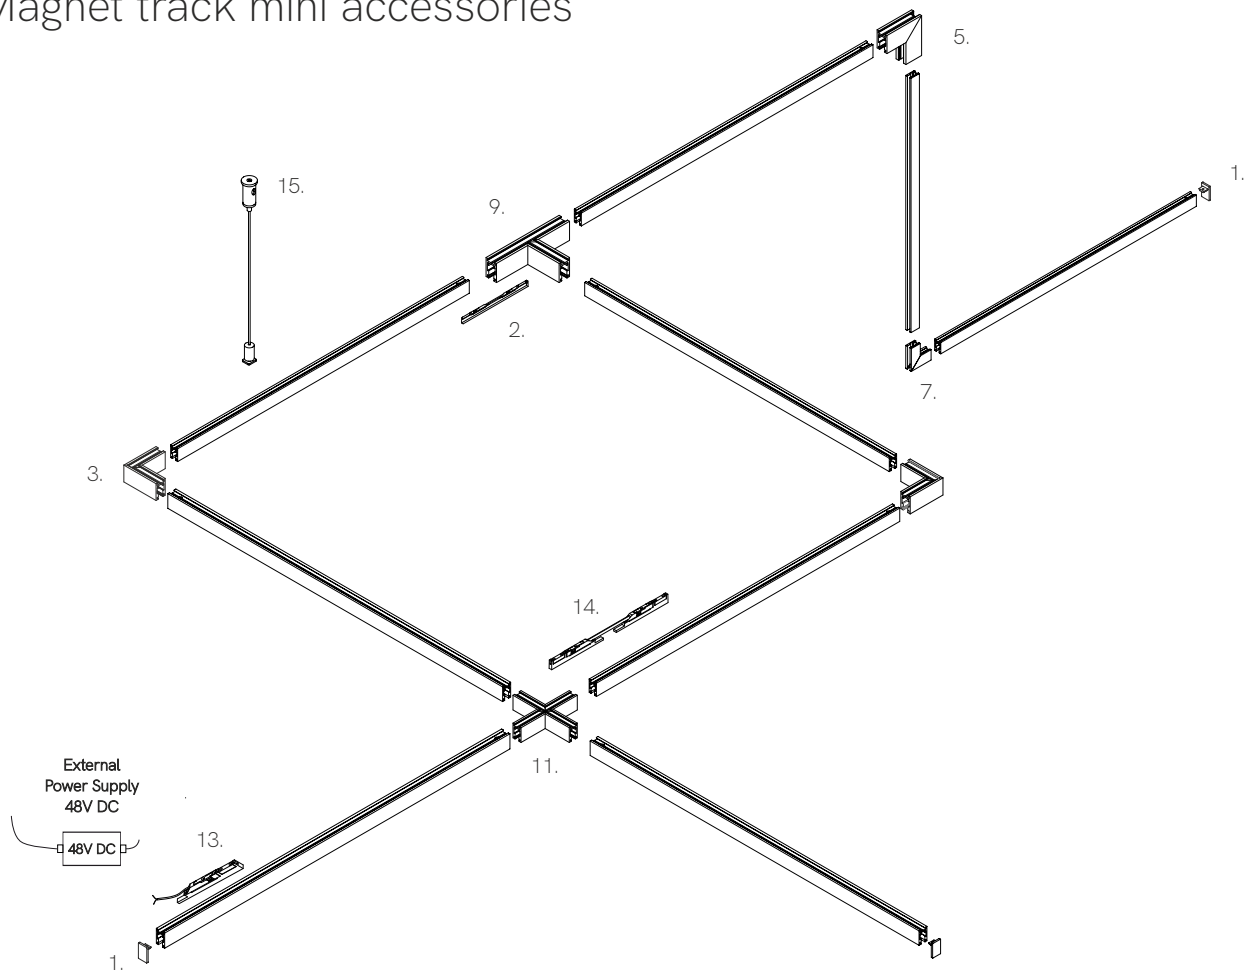

Power Supplies 48V mini

Code	Version	Power Max	IP	VDC OUT	Size
4725	☐ Power Supply	75W	IP20	48 VDC	350x30x18mm
4726	☐ Power Supply	150W	IP20	48 VDC	350x30x18mm
4727	☐ Power Supply	250W	IP20	48 VDC	400x40x22mm

Control Tuya/RF/Push (page 337)

Code	Version	Power Max	VDC IN	Size
22699	☐ NEW Controller Push/Tuya RF1C	1Cx10/15A	12-48 VDC	175x45x27mm
22571	☐ NEW Mini controller Tuya/RF/Push 1C	1C/5A	12-48 VDC	58x35,5x18mm

Control RF (page 327)

Code	Version	Power Max	V IN	Size
85890	☒ RF Dimming	-	3 VDC (CR2032)	139x36x11mm
85894	☒ RF Dimming 4 Zones	-	3 VDC (CR2032)	138x50x22mm
84431	☐ RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
84432	☒ RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
85144	☒ RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm

**Magnet track mini surface**

W: 19,3mm H: 12mm

☐	2m	5578
☐	3m	5579
☒	2m	5580
☒	3m	5581

**Magnet track mini recessed**

W: 35mm x H: 16,7mm

☐	2m	5582
☐	3m	5583
☒	2m	5584
☒	3m	5585

**L joint ceiling surface**

L: 42mm W: 42mm H: 19,3mm

☐	5594
☒	5595

**L joint ceiling recessed**

L: 35mm W: 35mm H: 16,7mm

☐	5606
☒	5607

**L joint wall ceiling outer surface**

L: 42mm W: 42mm H: 19,3mm

☐	5596
☒	5597

**L joint wall ceiling outer recessed**

L: 35mm W: 35mm H: 16,7mm

☐	5608
☒	5609

**L joint wall ceiling inner surface**

L: 42mm W: 42mm H: 19,3mm

☐	5598
☒	5599

**L joint wall ceiling inner recessed**

L: 35mm W: 35mm H: 16,7mm

☐	5610
☒	5611

**T joint ceiling surface**

L: 84mm W: 48mm H: 19,3mm

☐	5600
☒	5601

**T joint ceiling recessed**

L: 84mm W: 48mm H: 16,7mm

☐	5612
☒	5613

**X joint ceiling surface**

L: 84mm W: 84mm H: 19,3mm

☐	5602
☒	5603

**X joint ceiling recessed**

L: 84mm W: 84mm H: 16,7mm

☐	5614
☒	5615

**End cap surface / recessed**

L: 12mm W: 5mm H: 19,3mm

☐	5586
☒	5587

**Linear joint**

L: 200mm W: 5mm H: 14mm

☐	5590
☒	5591

**Start connector**

L: 100mm W: 5mm H: 14mm

☐	5588
☒	5589

**Suspension kit**

L: 2.000mm W: 15mm

☐	5604
☒	5605

**Central corner connector**

L: 225mm W: 5mm H: 14mm

☐	5592
☒	5593





Mini Piccolo 48V mini



Piccolo 48V mini



14mm


126mm

54mm

Ø28mm

90°

350°



14mm


126mm

80mm

Ø34mm

90°

350°





*Need power supply (page 392).

Technical Information

Power	6W	10W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	380 lm / 415 lm	440 lm / 475 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black


Code	○ 2.700K5628	○ 2.700K5632
	○ 3.000K5629	○ 3.000K5633
	● 2.700K5630	● 2.700K5634
	● 3.000K5631	● 3.000K5635

1/48

1/36



Atmos slim 48V mini

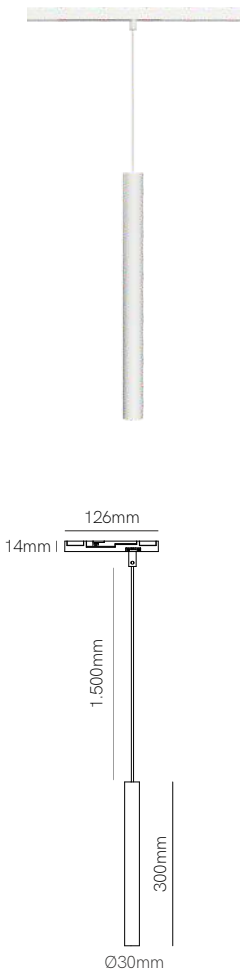


*Need power supply (page 392).



Technical Information

Power	6W
Installation	Magnet track mini
Color Temperature	2.700K / 3.000K
Lumens	380 lm / 415 lm
Material	Aluminium
Finishes	White / Black
Code	○ 2.700K 5636
	○ 3.000K 5637
	● 2.700K 5638
	● 3.000K 5639



3 YEARS
WARRANTY

26.000
HOURS

IP
20

48V
DC

UGR
<19

CRI
≥90

III

36°

+40°C
-20°C



1/24



Zoe 48V mini



Zoe 48V mini suspension

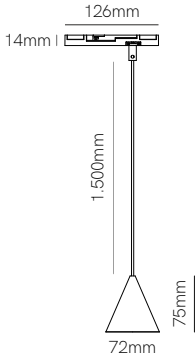


*Need power supply (page 392).



Technical Information

Power	6W	6W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	375 lm / 410 lm	375 lm / 410 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 2.700K 5644	○ 2.700K 5640
	○ 3.000K 5645	○ 3.000K 5641
	● 2.700K 5646	● 2.700K 5642
	● 3.000K 5647	● 3.000K 5643






Sphere 48V mini


Sphere 48V mini suspension

*Need power supply (page 392).

Technical Information


Power	7W	7W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	380 lm / 415 lm	380 lm / 415 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	 2.700K 5660	 2.700K 5656
	 3.000K 5661	 3.000K 5657
	 2.700K 5662	 2.700K 5658
	 3.000K 5663	 3.000K 5659

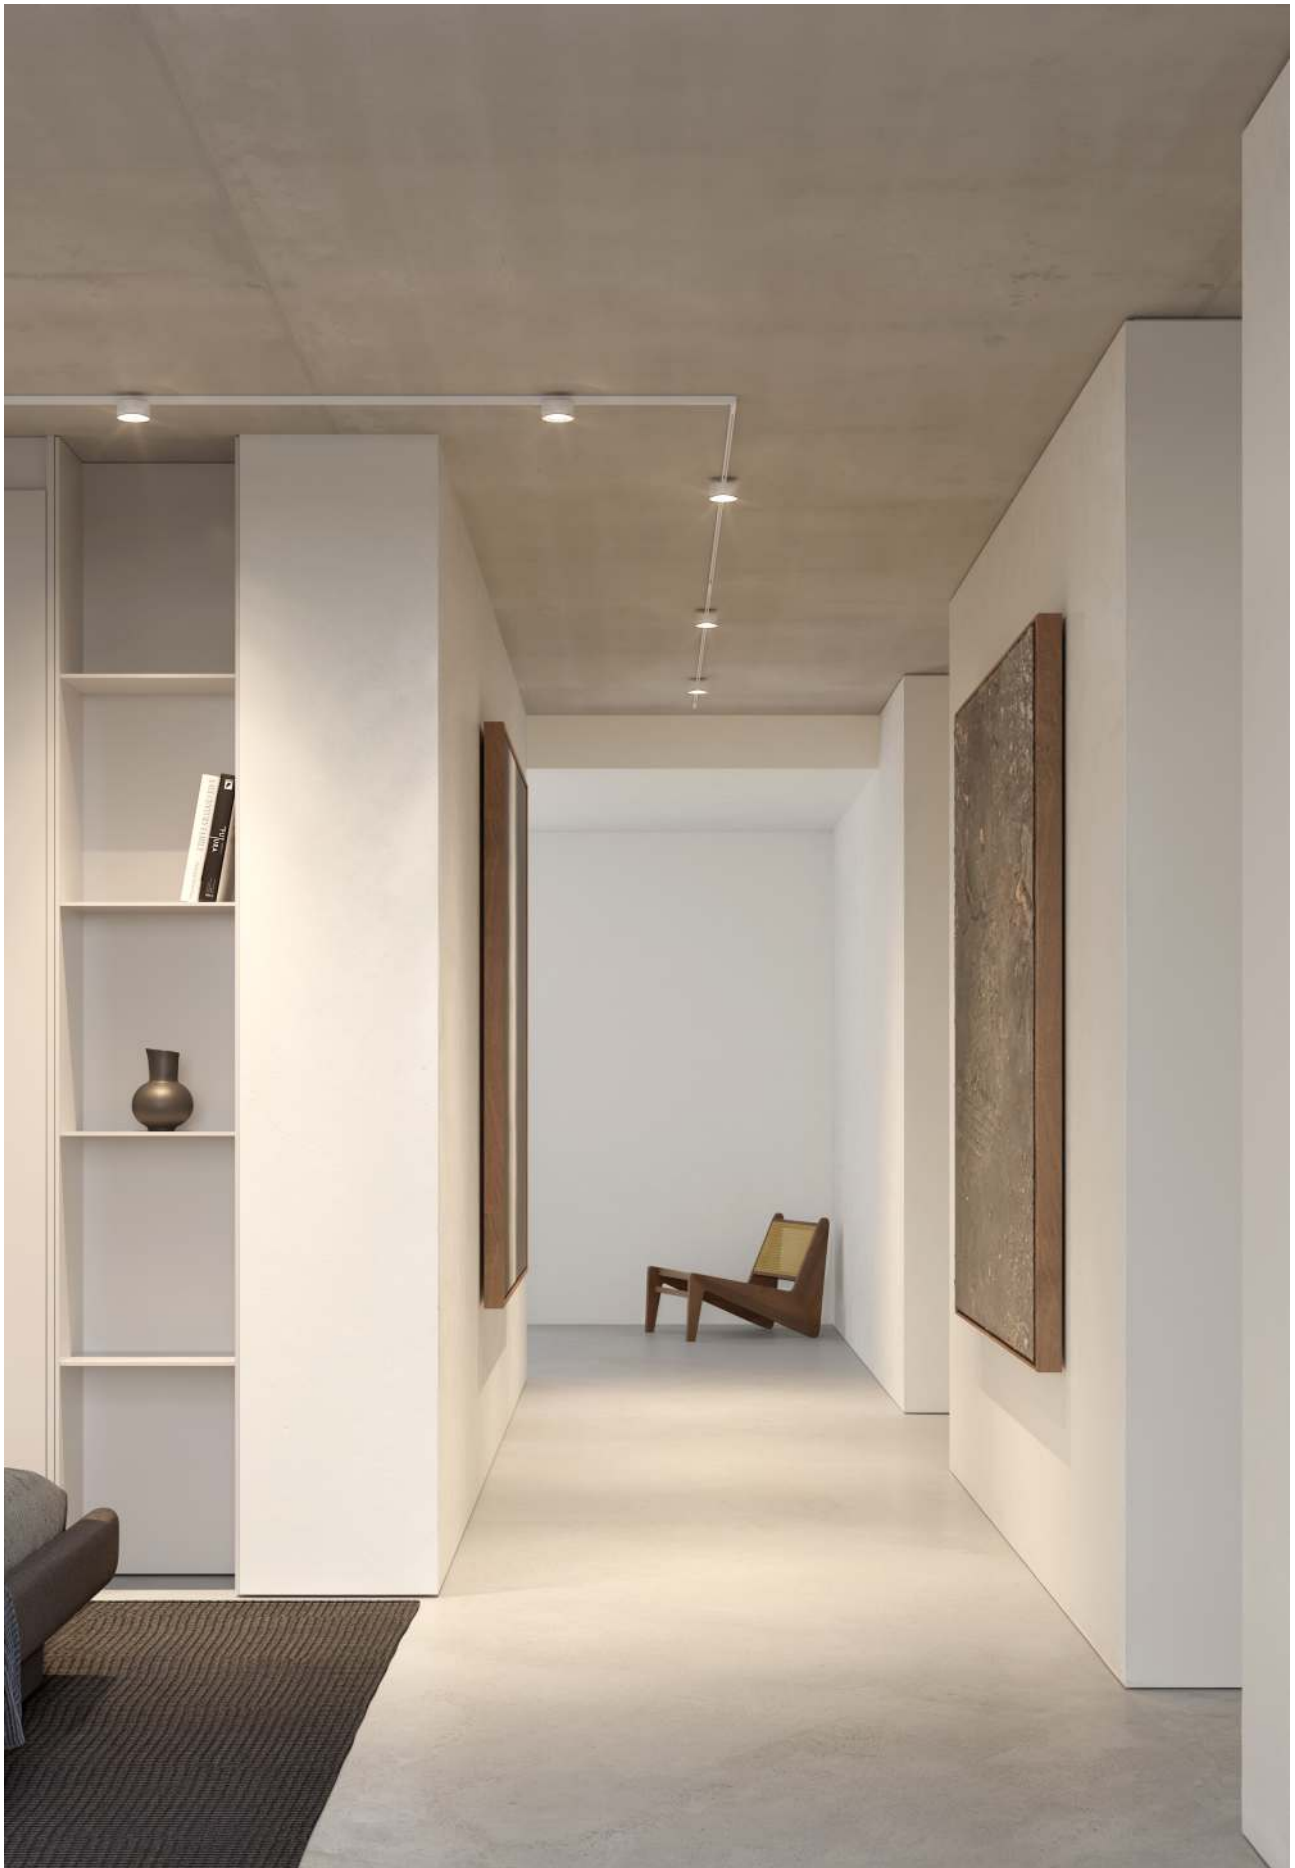

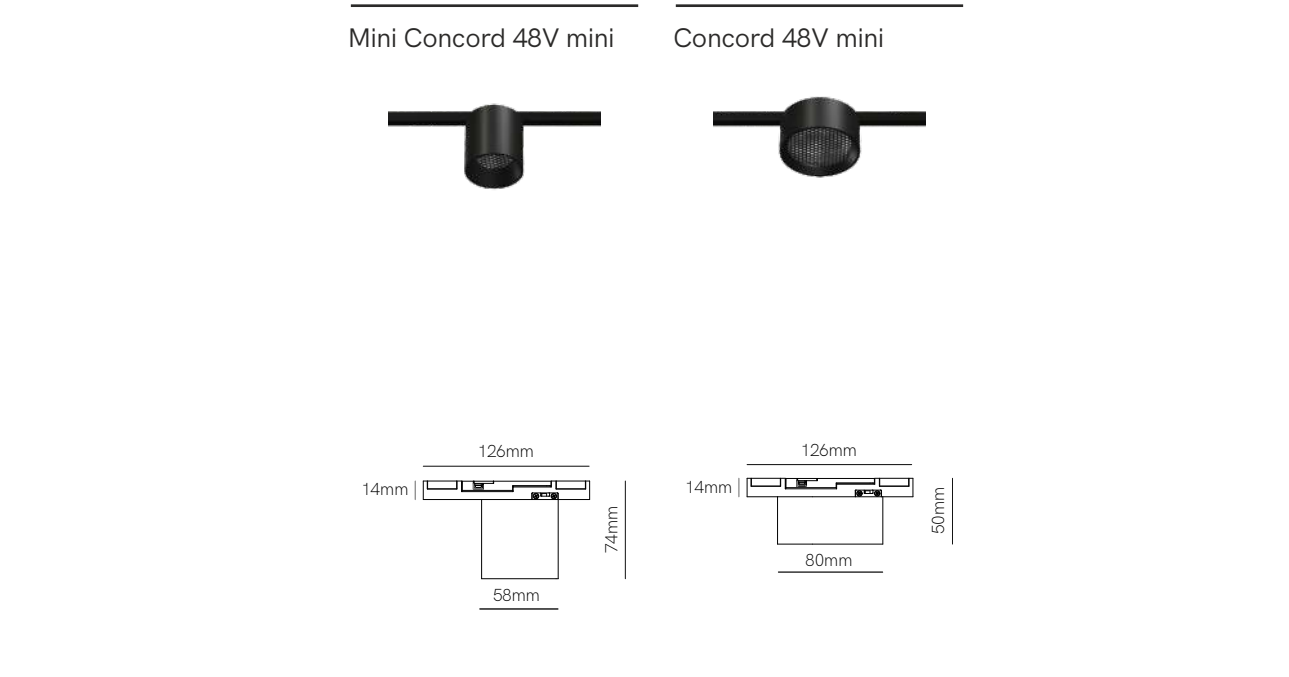




Tram 48V mini

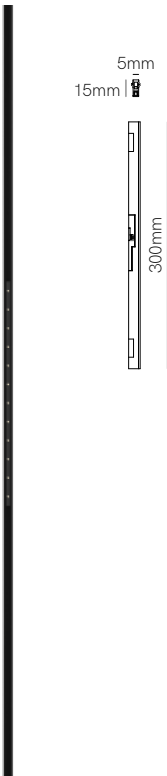


5mm
15mm
300mm

Mini Line 48V mini

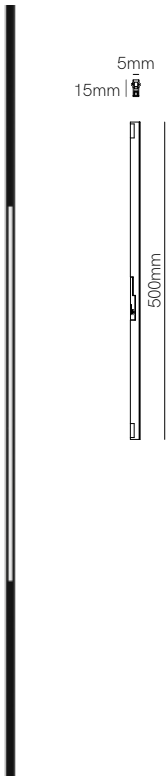

5mm
15mm
500mm

Line 48V mini

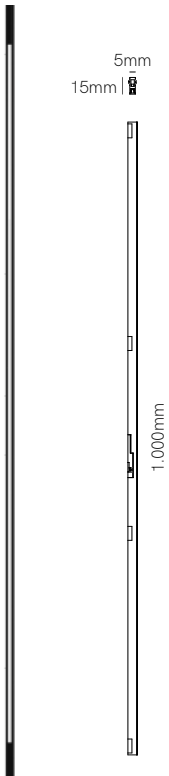

5mm
15mm
1.000mm

Tram 48V mini

Line 48V mini

*Need power supply (page 392).

Technical Information



Power	8W	8W	16W
Installation	Magnet track mini	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	545 lm / 605 lm	300 lm / 325 lm	600 lm / 650 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black


Code	○ 2.700K 5624	○ 2.700K 5616	○ 2.700K 5620
	○ 3.000K 5625	○ 3.000K 5617	○ 3.000K 5621
	● 2.700K 5626	● 2.700K 5618	● 2.700K 5622
	● 3.000K 5627	● 3.000K 5619	● 3.000K 5623
65° 1/60 100° 1/48 100° 1/36			



A modern interior scene featuring three blue upholstered armchairs arranged around three round wooden tables. The tables have a light-colored top and a dark, ribbed base. A martini glass sits on the middle table. Three pendant lights with white shades hang from the ceiling. A large green plant is on the right. The background is a dark, textured wall.

Magnet track

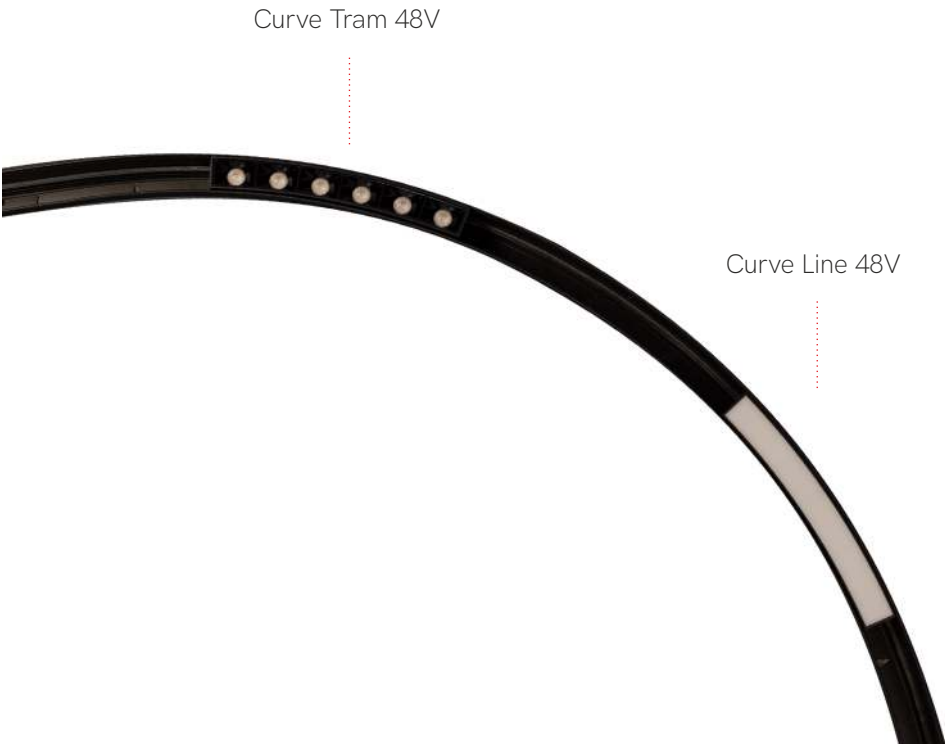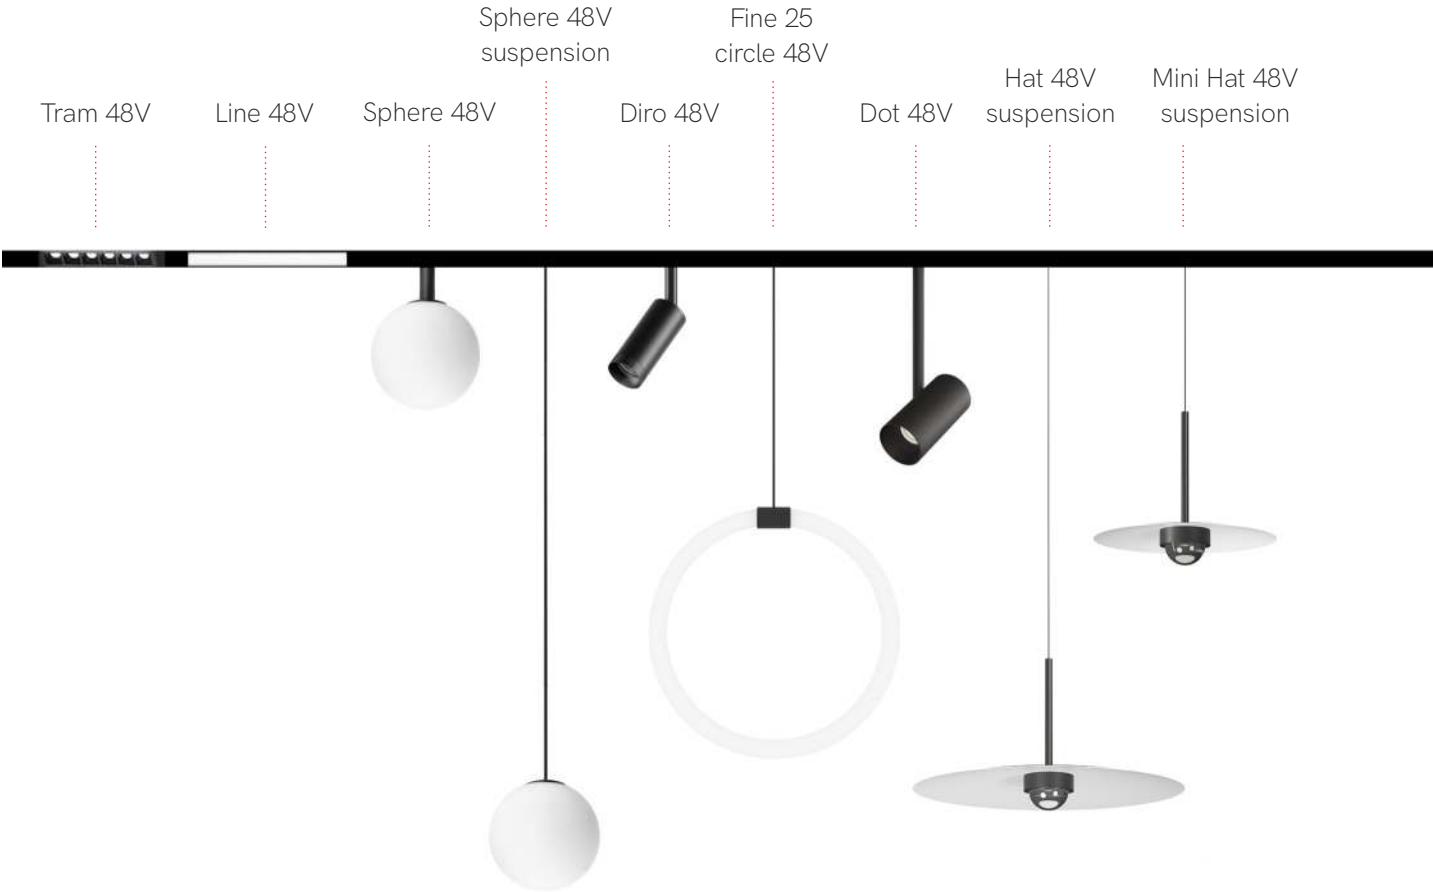

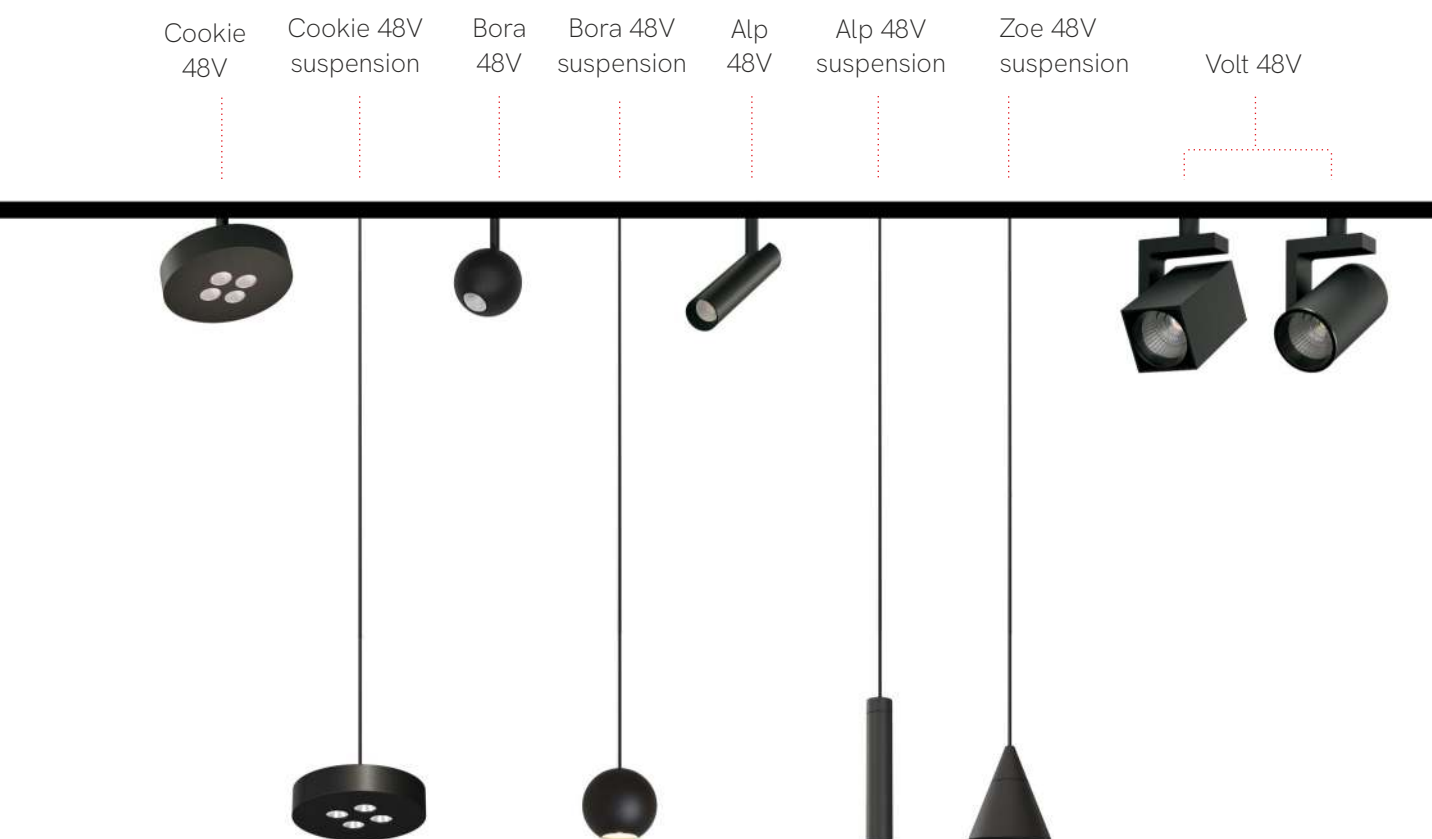

Magnet track 48V


Beneito Faure expands the collection for magnetic track and incorporates the mini Hat, a current trend in decorative lighting.

Thanks to the magnetized system, the spotlights are easily coupled and illuminate when they come into contact with the track.

Beneito Faure amplía la colección para carril magnético e incorpora mini Hat, tendencia actual en iluminación decorativa.

Gracias al sistema imantado los focos se acoplan de forma sencilla y se iluminan cuando entran en contacto con el carril.

Magnet track accessories

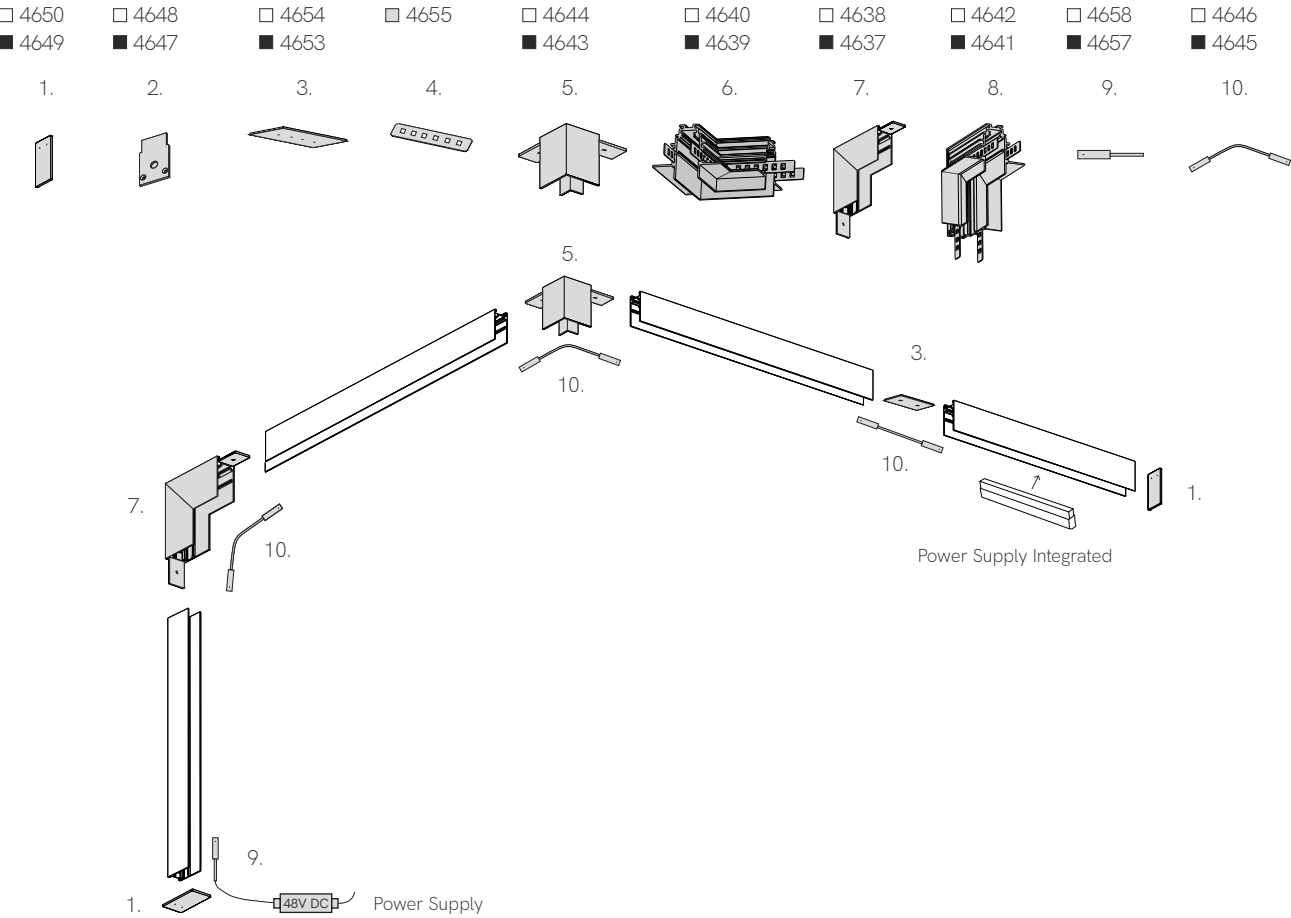

**Magnet track 48V surface**

W: 26mm H: 53mm

☐	1m	4660
☐	2m	4662
☒	1m	4659
☒	2m	4661

**Magnet track 48V recessed**

W: 72mm x H: 55mm

☐	1m	4664
☐	2m	4666
☒	1m	4663
☒	2m	4665



x2

End cap 48V surface

L: 53mm W: 26.6mm H: 2mm

☐	4650
☒	4649



x2

End cap 48V recessed

L: 52mm W: 32mm H: 2mm

☐	4648
☒	4647




x1 + x2

L joint wall ceiling 48V surface

L: 100mm W: 100mm H: 26mm

☐	4638
☒	4637




x1 + x4

L joint wall ceiling 48V recessed

L: 100mm W: 100mm H: 72mm

☐	4642
☒	4641



x1 + x2

L joint 48V ceiling surface

L: 40mm W: 40mm H: 53mm

☐	4644
☒	4643



x1 + x4

L joint 48V ceiling recessed

L: 100mm W: 100mm H: 55mm

☐	4640
☒	4639

**Curve magnet track 48V surface**

W: 26mm H: 53mm

☐	R500 1/4	5317
☒	R500 1/4	5319

**Curve/straight end cap 48V**

L: 53mm W: 26.6mm H: 2mm

☐	4650-N
☒	4649-N

**Linear joint 48V surface**

L: 80mm W: 22.5mm H: 2mm

☐	4654
☒	4653



x2

Linear joint 48V recessed

L: 70mm W: 11.5mm H: 1mm

☒	4655
-------------------------------------	------

**Start connector 48V**


L: 98mm W: 18mm H: 18mm

☐	4658-N
☒	4657-N

**Central corner connector 48V**

L: 98mm W: 18mm H: 18mm

☐	4646-N
☒	4645-N

**PVC trim 48V**

W: 26.8mm H: 3.5mm

☒	1m	4651
☒	2m	4652

**Suspension kit 48V**

L: 45mm W: 22mm | Ø15mm H: 1.900mm

☒	4807
-------------------------------------	------

Surface



Recessed



Common





Casambi magnet track control



CASAMBI is a master DALI device, using Bluetooth technology, suitable for monomaster applications, developed to control DALI lamps via mobile devices, using the Casambi app. 64 lamps (control gear) can be programmed, and assigned to up to 8 groups.


Power supply 24Vdc to 48Vdc, not polarized. Fused and protected against voltage peaks.
Two automatic programming modes, Standard and Fast Group, to program new lamps found on the bus.

Allows for the connection of up to 64 DALI lamps (control gear), assigning them to up to 8 groups.
Fixtures available for: Broadcast control, 8 groups, 4 TW groups.
The lamps on the bus are controlled by means of group commands: each lamp will execute only commands sent to its belonging group.


CASAMBI es un dispositivo maestro DALI, con tecnología Bluetooth, adecuado para aplicaciones monomáster, está desarrollado para controlar lámparas DALI a través de dispositivos móviles, utilizando la app Casambi. Se pueden programar 64 lámparas (equipo de control) y asignarlas a hasta un máximo de 8 grupos.

Fuente de alimentación de 24 Vdc a 48 Vdc, no polarizada, fusionada y protegida contra picos de voltaje. Dos modos de programación automática, Estándar y Grupo Rápido, para programar nuevas lámparas que se encuentren en el bus.

Permite la conexión de hasta 64 lámparas DALI (equipos auxiliares), asignándolas a un máximo de 8 grupos.
Dispositivos disponibles para: Control de difusión, 8 grupos, 4 grupos TW.
Las lámparas del bus se controlan mediante comandos de grupo: cada lámpara ejecutará sólo los comandos enviados a su grupo de pertenencia.

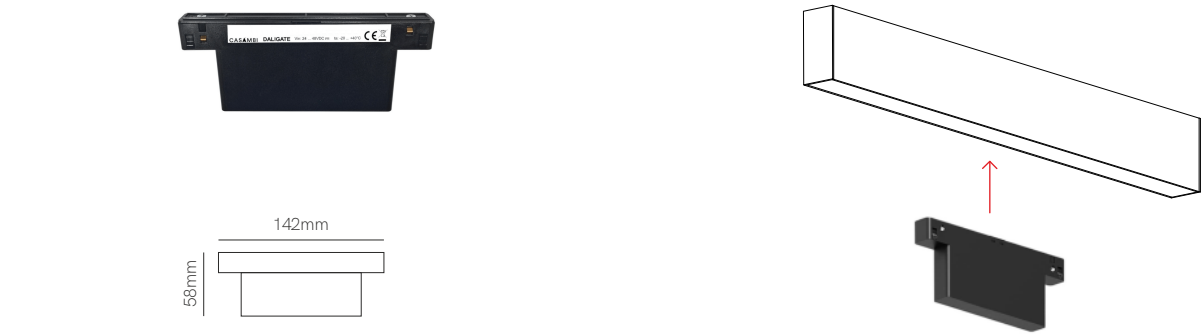

Code	Version	Power	IP	VDC OUT	Size
□ 6721	Casambi control 48V	8W	IP20	24-48 VDC	142x58x18mm
■ 6722	Casambi control 48V	8W	IP20	24-48 VDC	142x58x18mm







Alp 48V



Alp 48V suspension




*Need power supply (page 410).



Technical Information

Power	4,5W	4,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	260 lm / 270 lm	260 lm / 270 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 2.700K 4787	○ 2.700K 4791
	○ 3.000K 4788	○ 3.000K 4792
	● 2.700K 4789	● 2.700K 4793
	● 3.000K 4790	● 3.000K 4794
	①  Custom RAL	①  Custom RAL
	1/20	1/25




① Consult delivery terms and conditions.


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 |  38° |  +40°C / -20°C



Mini Bora 48V



Bora 48V suspension



*Need power supply (page 410).




Technical Information

Power	4,5W	8,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	315 lm / 325 lm	610 lm / 620 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold
Code	○ 2.700K 4581 ○ 3.000K 4582 ● 2.700K 4583 ● 3.000K 4584 ● 2.700K 4585 ● 3.000K 4586 ● 2.700K 4587 ● 3.000K 4588	○ 2.700K 4573 ○ 3.000K 4574 ● 2.700K 4575 ● 3.000K 4576 ● 2.700K 4577 ● 3.000K 4578 ● 2.700K 4579 ● 3.000K 4580


UGR <10 | 38°

UGR <15 | 36°







Nano Tram 48V



Mini Tram 48V



Curve Tram 48V




*Need power supply (page 410).



Technical Information

Power	4,5W	9W	6W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	300 lm / 310 lm	690 lm / 710 lm	500 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 2.700K 4776 ☐ 3.000K 4777 ☒ 2.700K 4778 ☒ 3.000K 4779 26.000 HOURS 24° 1/50	☐ 2.700K 4780 ☐ 3.000K 4781 ☒ 2.700K 4782 ☒ 3.000K 4783 26.000 HOURS 24° 1/50	☐ 2.700K 5309 ☐ 3.000K 5310 ☒ 2.700K 5311 ☒ 3.000K 5312 30.000 HOURS 36° 1/40




3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 36° | +40°C / -20°C




Nano Line 48V






Mini Line 48V






Line 48V





Curve Line 48V








*Need power supply (page 410).

Technical Information


Power	7,5W	15W	30W	8W
Installation	Magnet Track	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	310 lm / 320 lm	740 lm / 760 lm	1.000 lm / 1.050 lm	300 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black	White / Black
Code	■ 2.700K 5202	■ 2.700K 5203	■ 2.700K 5204	○ 2.700K 5313
	■ 3.000K 4784	■ 3.000K 4785	■ 3.000K 4786	○ 3.000K 5314
				● 2.700K 5315
				● 3.000K 5316
	26.000 HOURS 1/25	26.000 HOURS 1/25	26.000 HOURS 1/20	30.000 HOURS 1/40



3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C / -20°C



Diro 48V



*Need power supply (page 410).




Casambi magnet track control (page 413).




Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	Dali 2.700K - 6.500K
Lumens	420 lm
Material	Aluminium
Finishes	White / Black
Code	5239 5238

Accessories



Honeycomb anti-glare
(Included)



5 YEARS WARRANTY

50.000 HOURS

IP 20

48V DC

UGR <10

CRI ≥90

36°


+40°C
-20°C

1/20



Ifni Hairdresser, Gipuzkoa (Spain). Design: Basoko.eus Photography: Maider Agirre.


Zoe 48V suspension



*Need power supply (page 410).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	360 lm / 370 lm
Material	Aluminium
Finishes	White / Black
Code	△ 2.700K4795 △ 3.000K4796 ▲ 2.700K4797 ▲ 3.000K4798 ①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS
WARRANTY

26.000
HOURS

IP
20

48V
DC

UGR
<19

CRI

≥90

III

38°

+

40°C

-



20°C

1/36



Mini Hat 48V suspension

Hat 48V suspension

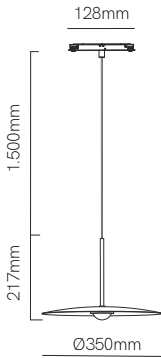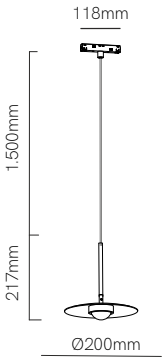


*Need power supply (page 410).



Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	800 lm	800 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○	2.700K	5714	○	2.700K	5363
	○	3.000K	5716	○	3.000K	5364
	●	2.700K	5715	●	2.700K	5366
	●	3.000K	5717	●	3.000K	5367






Sphere 48V



Sphere 48V suspension




*Need power supply (page 410).



Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	430 lm	430 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White / Black	White / Black
Code	○ 2.700K 5369	○ 2.700K 5375
	○ 3.000K 5370	○ 3.000K 5376
	● 2.700K 5372	● 2.700K 5378
	● 3.000K 5373	● 3.000K 5379



3 YEARS WARRANTY

30.000 HOURS

IP 20

48V DC

360°



+40°C -20°C

1/12



Volt r 48V

Volt sq 48V




*Need power supply (page 410).

 Casambi magnet track control (page 413).



Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	5037 5038  Custom RAL 5039 5040  Custom RAL	



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS





IP 20

48V DC



CRI ≥90



38°



IK06



+45°C
-20°C




DALI2



1/20



Dot 48V




*Need power supply (page 410).



Technical Information

Power	11W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	680 lm / 690 lm
Material	Aluminium
Finishes	White / Black
Code	○ 2.700K 4768 ○ 3.000K 4769 ● 2.700K 4770 ● 3.000K 4771 ①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

26.000 HOURS

IP 20

48V DC

UGR <19




 35°

 +40°C / -20°C


 1/20





Cookie 48V



Cookie 48V



Cookie 48V suspension

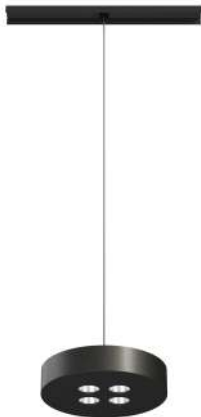

*Need power supply (page 410).

 Casambi magnet track control (page 413).



Technical Information

Power	12W	12W	12W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	940 lm / 950 lm	500 lm - 700 lm	500 lm - 700 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black


Code	☐ 2.700K 4772	☐ 5181	☐ 5185
	☐ 3.000K 4773	☒ 5182	☒ 5186
	☒ 2.700K 4774	☐ Custom RAL	☐ Custom RAL
	☒ Custom RAL		

26.000
HOURS

30.000
HOURS



30.000
HOURS



① Consult delivery terms and conditions.

3 YEARS WARRANTY

IP 20

48V DC

UGR <19

CRI ≥90

 38°

 +40°C
-20°C

 1/20



Fine 25 circle 48V




*Need power supply (page 410).



Technical Information

Power	19W
Installation	Magnet Track
Color Temperature	3.000K / 4.000K
Lumens	850 lm / 950 lm
Finishes	Aluminium / Black
Code	○ 3.000K 5431
	○ 4.000K 5441
	● 3.000K 5432
	● 4.000K 5442



3 YEARS WARRANTY

35.000 HOURS

IP 20

48V DC

CRI ≥90

360°

+40°C
-20°C

1



► VIDEO



A modern outdoor dining area at dusk. The scene features a wooden dining table and chairs with grey cushions. The ceiling is dark with multiple tracks of warm white LED lights. A large window or glass partition is visible, showing a view of a forested hillside. A small potted plant sits on the table. The overall atmosphere is warm and contemporary.

Outdoor track



Outdoor track accessories





Outdoor Track IP
W: 26mm H: 25mm

☐	5406	1m
☐	5407	2m
☐	5408	3m
☒	5409	1m
☒	5410	2m
☒	5411	3m



L joint ceiling IP
L: 70mm W: 70mm H: 26mm

☐	5412
☒	5413



L joint wall ceiling IP
L: 70mm W: 70mm H: 30mm

☐	5425
☒	5426



Linear joint IP
L: 100mm W: 30mm H: 26mm

☐	5414
☒	5415



End cap IP
L: 62mm W: 30mm H: 26mm

☐	5416
☒	5417



TRACK LIGHTS

Power Supplies 48V




Code		Version	Power	IP	VDC OUT	Size
4711	☒	Power Supply Basic	60W	IP67	48 VDC	150x53x36mm
4707	☐	Power Supply Top	150W	IP65	48 VDC	219x63x35mm
4708	☐	Power Supply Top	240W	IP65	48 VDC	244x71x37mm







Frame 48V IP 1m



Frame 48V IP 2m



Frame 48V IP 3m



*Need power supply (page 441).




Technical Information

Power	10W	20W	30W
Installation	Outdoor Track	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	680 lm	1.400 lm	2.055 lm
Material	Silicone	Silicone	Silicone
Code	☐ 2.700K 5400	☐ 2.700K 5402	☐ 2.700K 5404
	☐ 3.000K 5401	☐ 3.000K 5403	☐ 3.000K 5405

Accessories




Waterproof silicone cover IP (Needed when cut Frame)
L: 20mm W: 14mm H: 4mm
☐ 5418





Atmos slim 48V IP

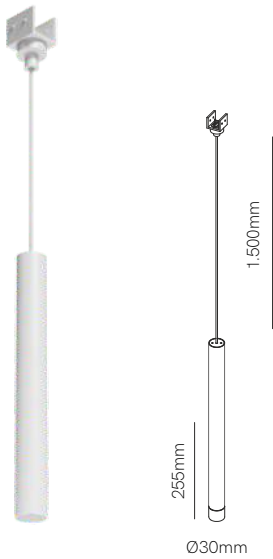


*Need power supply (page 441).



Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	510 lm
Material	Aluminium
Finishes	White / Black
Code	○ 2.700K 5392
	○ 3.000K 5393
	● 2.700K 5394
	● 3.000K 5395



3 YEARS WARRANTY

30.000 HOURS

IP 65

48V DC

UGR <19

CRI ≥90


III

38°


IK06

+45°C / -20°C

1/20

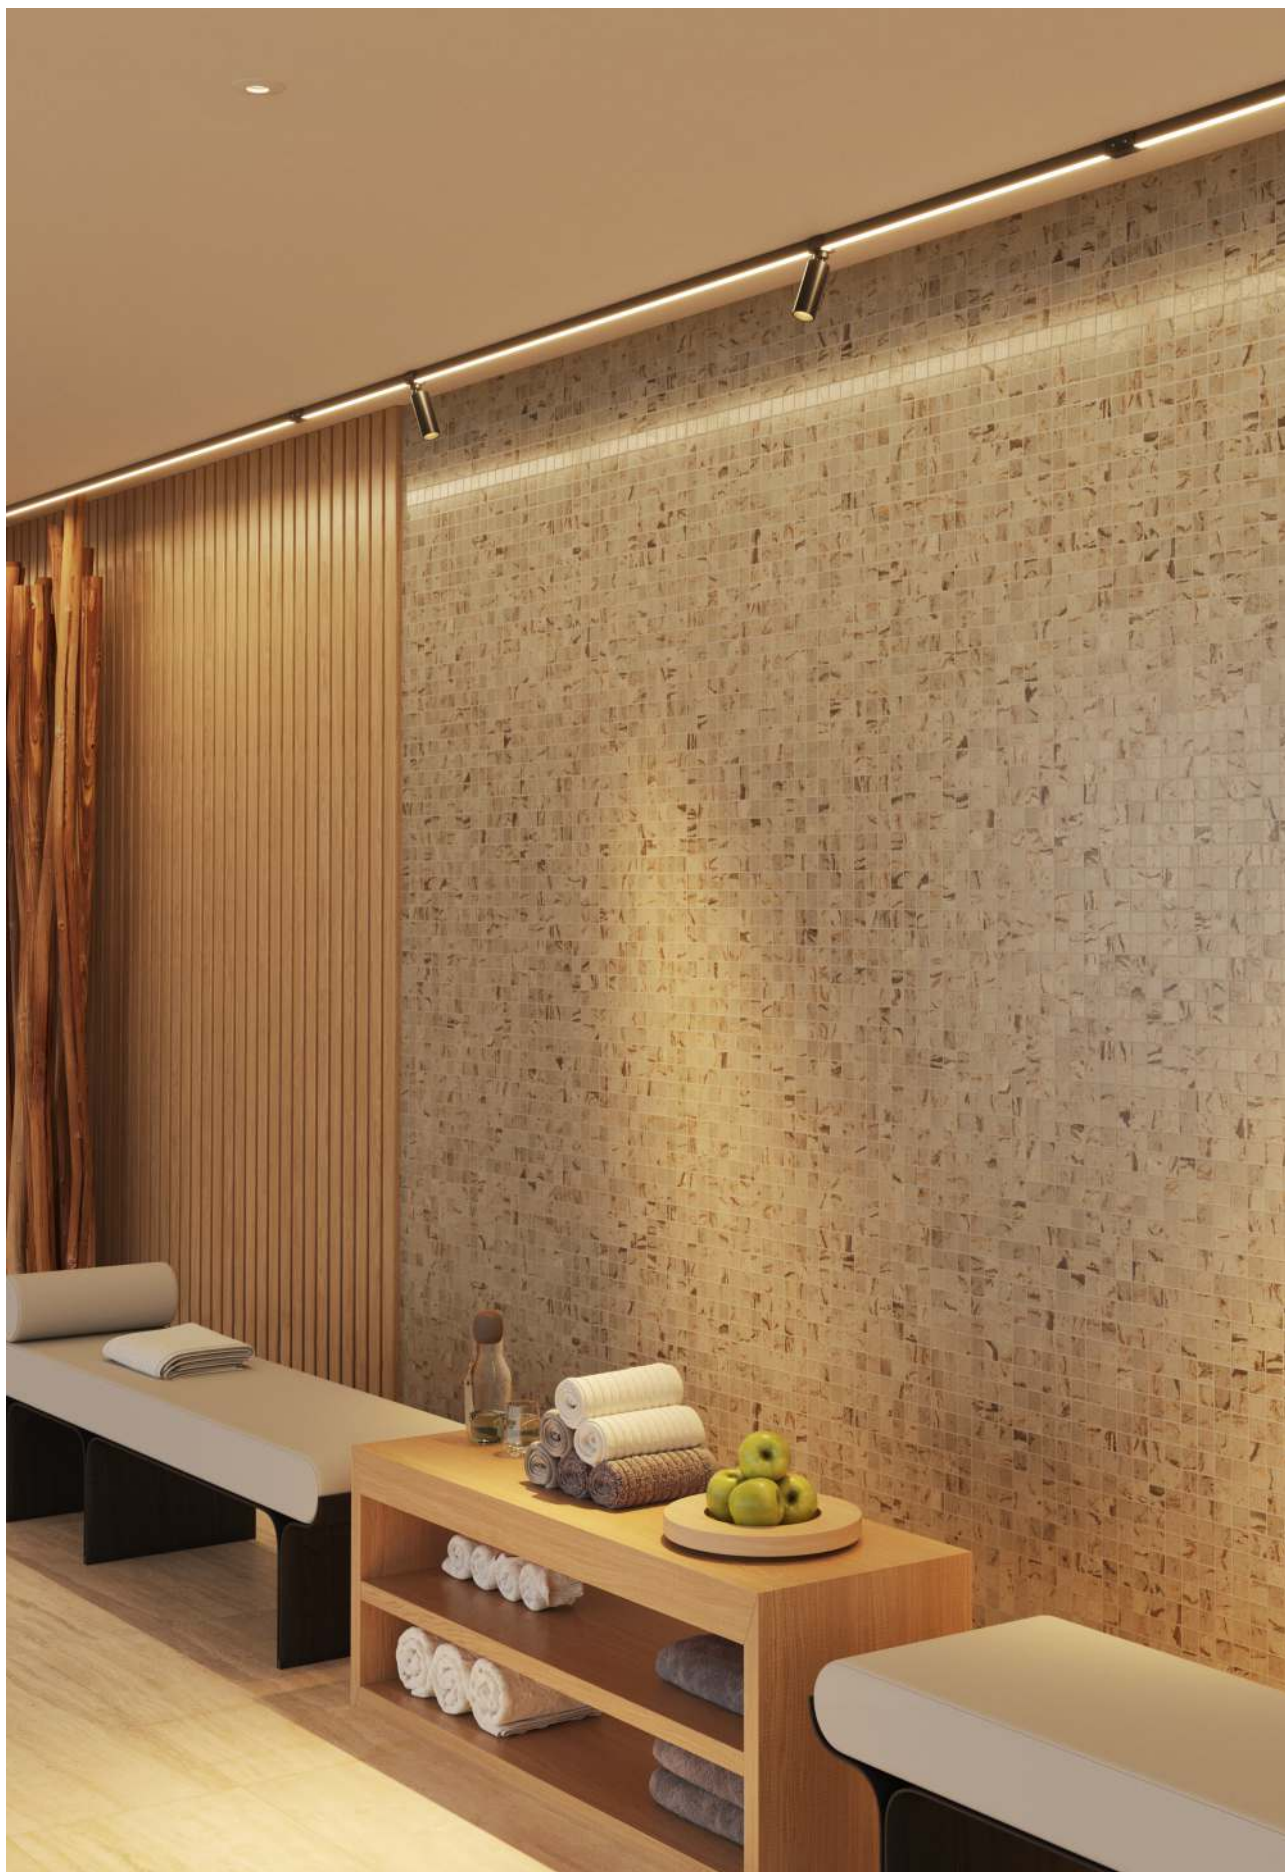

Bit 48V IP




*Need power supply (page 441).



Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	630 lm
Material	Aluminium
Finishes	White / Black
Code	○ 2.700K 5396
	○ 3.000K 5397
	● 2.700K 5398
	● 3.000K 5399



3 YEARS WARRANTY

30.000 HOURS

IP 65

48V DC

UGR <19

CRI ≥90

55°

IK06

+45°C
-20°C




1/20



Ice 48V IP



Ice XL 48V IP




*Need power supply (page 441).



Technical Information

Power	10W	20W
Installation	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	685 lm	1.110 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 2.700K 5384	☐ 2.700K 5388
	☐ 3.000K 5385	☐ 3.000K 5389
	☒ 2.700K 5386	☒ 2.700K 5390
	☒ 3.000K 5387	☒ 3.000K 5391
1/40 1/20		






Recessed







Nano Argo flat recessed



Argo recessed




Argo XL recessed



Technical Information

Power	2W	3,5W	3,5W
Driver	3,3 VDC 200 mA	18 VDC 140 mA	18 VDC 140 mA
Installation	Recessed	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	80 lm	125 lm	125 lm
Material	Aluminium and acrylic	Aluminium and acrylic	Aluminium and acrylic
Finishes	White / Black	White / Black	White / Black
Code	○ 2.700K5258 ○ 3.000K5259 ○ 4.000K5260 ● 2.700K5261 ● 3.000K5262 ● 4.000K5263	○ 2.700K5246 ○ 3.000K5247 ○ 4.000K5248 ● 2.700K5249 ● 3.000K5250 ● 4.000K5251	○ 2.700K5252 ○ 3.000K5253 ○ 4.000K5254 ● 2.700K5255 ● 3.000K5256 ● 4.000K5257



3 YEARS WARRANTY

35.000 HOURS

IP 20

220/240 VAC

PF >0,5


CRI ≥90

180°


50/60 Hz

+40°C -20°C

1/100

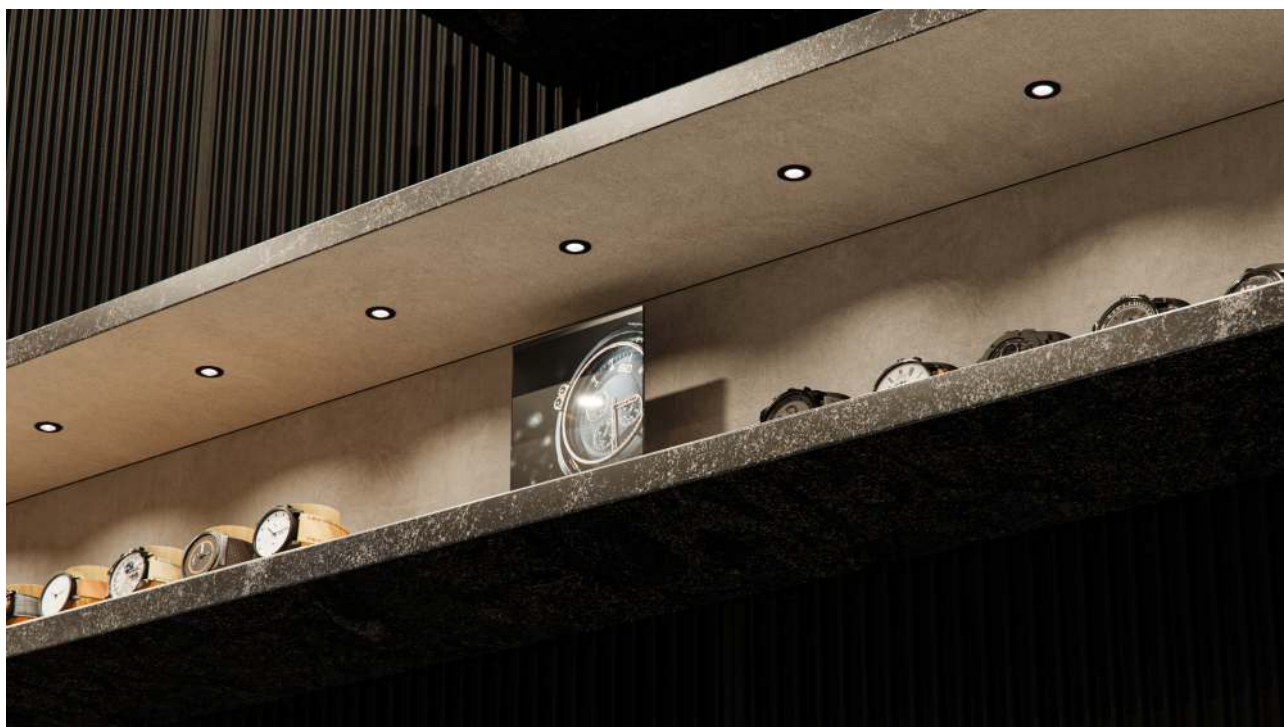

Atom recessed



Technical Information

Power	2W
Driver	3,3 VDC 200 mA
Installation	Recessed
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	90 lm
Material	Aluminium
Finishes	White / Black

Code	○	2.700K	5267
	○	3.000K	5268
	○	4.000K	5269
	●	2.700K	5270
	●	3.000K	5271
	●	4.000K	5272



3 YEARS WARRANTY

35.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,5

CRI ≥90

24°


50/60 Hz

+40°C -20°C


1/100



Micro Zoom recessed

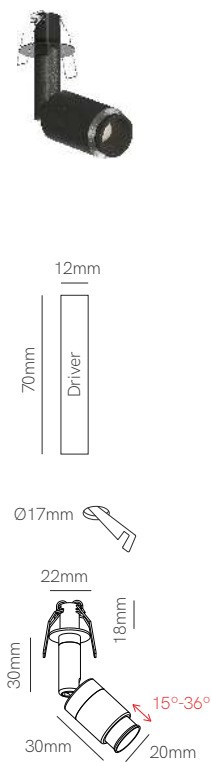

Micro Zoom XL recessed

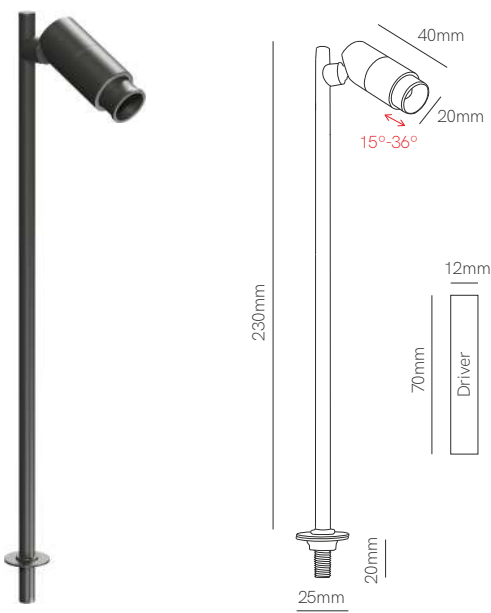


Technical Information

Power	2W	2W
Driver	3 VDC 200 mA	3 VDA 200 mA
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	70 lm	70 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○	2.700K	5273	○	2.700K	5279
	○	3.000K	5274	○	3.000K	5280
	○	4.000K	5275	○	4.000K	5281
	●	2.700K	5276	●	2.700K	5282
	●	3.000K	5277	●	3.000K	5283
	●	4.000K	5278	●	4.000K	5284

1/100

1/50




3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 15°-36° | 50/60 Hz | +40°C / -20°C




Ribera Manero, seafood restaurant, Barcelona (Spain).


Nano Pulsar r / sq
recessed

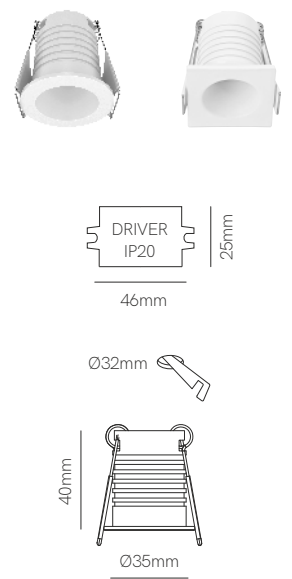

Nano Pulsar r / sq
trim

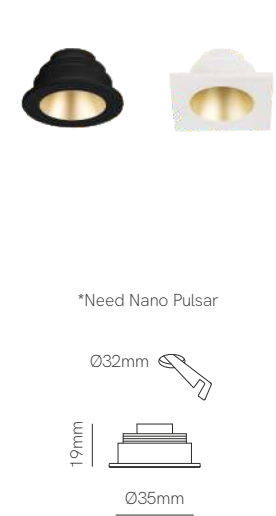

Nano Pulsar r / sq
surface

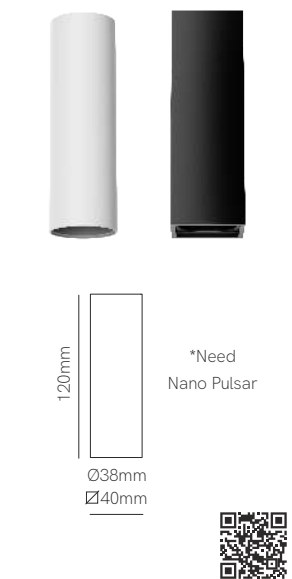


Technical Information

Power	3,5W	-	-
Driver	4,7 VDC 700 mA	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	2.700K / 3.000K / 4.000K	-	-
Lumens	170 lm / 180 lm / 200 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White-matt gold/Black-matt gold	White / Black
Code	 2.700K 4297  3.000K 4298  4.000K 4299  2.700K 4300  3.000K 4301  4.000K 4302  2.700K 4451  3.000K 4452  4.000K 4453  2.700K 4454  3.000K 4455  4.000K 4456  Custom RAL	 5208  5209  5210  5211	 4410  4411  4412  4413  Custom RAL

1/50

1/4/300

1/50




① Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 |  30° | 50/60 Hz |  |  +40°C / -20°C




Masia, Solsonès, Lleida (Spain). Design: BECOinteriors Photography: @marsimal


Pulsar dimm recessed



Pulsar trim

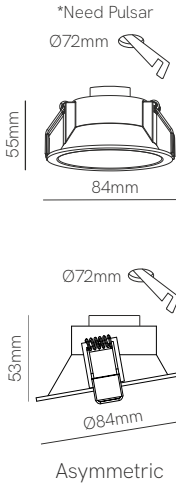

Pulsar surface accessory



Technical Information


Power	8W	-	-
Driver	DOB	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	-	-
Lumens	780 lm / 800 lm / 840 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black / White-matt gold / Black-matt gold	White / Black

Code	☐ 5057	☐ 5206	☐ 5110
	☐ 5058	☐ 5207	☐ 5111
	☒ Custom RAL	☐ 5059 Asymmetric	☒ Custom RAL
		☐ 5060 Asymmetric	
		☐ 5212 Asymmetric	
		☐ 5213 Asymmetric	
		☒ Custom RAL	

1/10/30

1/50

1/20





Consult delivery terms and conditions.



Nano Oxo r recessed


Nano Oxo sq recessed



Technical Information

Power	4W	4W
Driver	40 VDC 100mA	40 VDC 100mA
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	380 lm	380 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○ 4549-N	□ 4550-N
	● 4551-N	■ 4552-N
	①  Custom RAL	①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

 → 

IP 20

220/240 VAC

UGR <19

PF >0,5





45°



50/60 Hz





+50°C
-20°C





1/10/50



Mini Oxo r recessed



Mini Oxo sq recessed



Technical Information

Power	6W	6W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	600 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	○ 5061 ● 5062	□ 5108 ■ 5109



3 YEARS
WARRANTY

25.000
HOURS

 → 

IP
20

100/277
VAC

UGR
<19

PF
>0,9

CRI
≥80



42°

50/60
Hz



 +40°C
-20°C

 CCT
SWITCH

1/20









Mini Oxo rect 2 recessed



Mini Oxo rect 4 recessed



Mini Oxo rect 6 recessed



Technical Information


Power	12W	24W	36W
Driver	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.200 lm	2.400 lm	3.600 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black

Code	☐ 5063	☐ 5065	☐ 5067
	☒ 5064	☒ 5066	☒ 5068

1/10

1/10

1/5





3 YEARS WARRANTY | 25.000 HOURS | | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C / -20°C | CCT SWITCH



Institut Ferrés Anat, Barcelona (Spain). Lighting project: Vié Il·luminació. Architecture: Pablo Amorós.

Oxo r dimm recessed




Oxo sq dimm recessed



Technical Information

Power	12W	12W
Driver	40 VDC 300 mA	40 VDC 300 mA
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.260 lm	1.260 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 4457-D(N) ● 4458-D(N) ①  Custom RAL	□ 4459-D(N) ■ 4460-D(N) ①  Custom RAL

Accessories




① Consult delivery terms and conditions.






Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.

Mini Bora recessed



Bora recessed




Technical Information

Power	4,5W	8,5W
Driver	12 VDC 350mA	18 VDC 350mA
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code	○	2.700K	4589	○	2.700K	4597
	○	3.000K	4590	○	3.000K	4598
	●	2.700K	4591	●	2.700K	4599
	●	3.000K	4592	●	3.000K	4600
	●	2.700K	4593	●	2.700K	4601
	●	3.000K	4594	●	3.000K	4602
	●	2.700K	4595	●	2.700K	4603
	●	3.000K	4596	●	3.000K	4604

UGR <10 | PF >0,5 | 38°

UGR <15 | PF >0,6 | 36°





Nano Tram
recessed



75mm
45mm

H=45.5mm


36X65mm

Mini Tram
recessed



147mm
45mm

H=45.5mm


36X137mm

Tram recessed



279mm
45mm

H=45.5mm


36X270mm

Tram XL recessed



411mm
45mm

H=45.5mm


36X403mm



*Tuya version need Tuya Smart App to work.



Technical Information


Power	6W	10W	20W	30W
Driver	24 VDC 250mA	42 VDC 350mA	42 VDC 550mA	42 VDC 800mA
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	Tuya 2.700K - 6.000K	Dali 2.700K - 6.000K	Tuya 2.700K - 6.000K	Tuya 2.700K -6.000K
Lumens	220 lm	500 lm	1.000 lm	1.500 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black	White / Black
Code	☐ 4731 Tuya ☒ 4732-V2 Dali	☐ 4733-V2 ☒ 4734-V2	☐ 4735 Tuya ☒ 4736-V2 Dali	☐ 4737 ☒ 4738
         				

Accessories



Tuya Gateway Wifi

☐ 4956



*See page 324 for Gateway additional info.

3 YEARS
WARRANTY

30.000
HOURS

IP 20

220/240
VAC

UGR <14

PF >0,9





50/60
Hz









Compac r recessed




Compac sq recessed



Technical Information

Power	8W	8W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	594 lm / 607 lm / 660 lm	594 lm / 607 lm / 660 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 2.700K 3951 ☐ 3.000K 3952 ☐ 4.000K 3953 Custom RAL ☐ 2.700K 3948 ☐ 3.000K 3949 ☐ 4.000K 3950 Custom RAL	



① Consult delivery terms and conditions.

3 YEARS
WARRANTY

25.000
HOURS

IP
44

220/240
VAC

PF
>0,5

CRI
≥80

90°

50/60
Hz


TRIAC DIMM

+40°C
-20°C

1/6/30



Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.

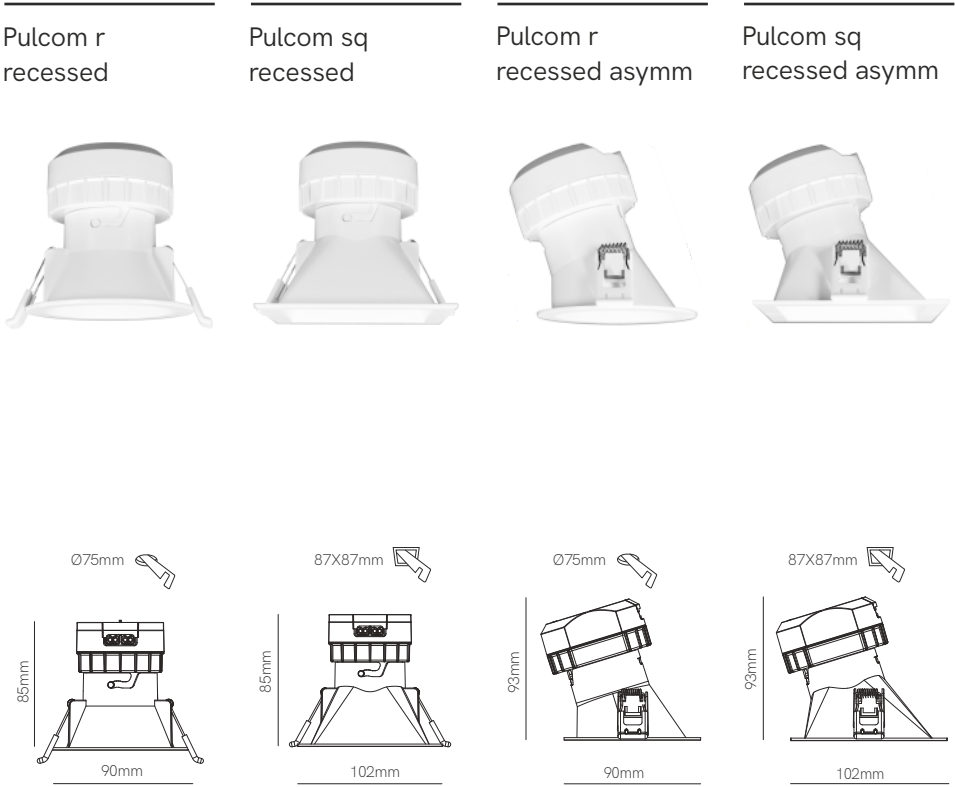

Technical Information				
Power	8W	8W	8W	8W
Driver	DOB	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature (Switch)	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K
Lumens	800 lm	800 lm	800 lm	800 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black	White / Black
Code	○ 4742	□ 4744	○ 4743	□ 4745
	● 4746	■ 4748	● 4747	■ 4749
	①  Custom RAL	①  Custom RAL	①  Custom RAL	①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 44

220/240 VAC

UGR <19

PF >0,9

CRI ≥80

 38°

50/60 Hz

 1K06



 +40°C
-20°C

 CCT SWITCH

1/5/20




Pulcom led accessory



Pulcom trim



Pulcom asymm trim



Pulcom r surface trim




*Pulcom trim and surface need Pulcom led.



Technical Information

Power	8W	-	-	-
Driver	DOB	-	-	-
Installation	Surface / Recessed	Recessed	Recessed	Surface
Color Temperature	2.700K / 3.200K / 4.000K	-	-	-
Lumens	800 lm	-	-	-
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black / Wood	White / Black	White / Black / Wood

Code	○ 4763	○ 4761	○ 4821	○ 5034
	● 4764	● 4762	● 4822	● 5035
		● 4935	□ 4825	● 5036
		□ 4823	■ 4826	① Custom RAL
		■ 4824	① Custom RAL	
		① Custom RAL		



① Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 44

220/240 VAC

UGR <19

PF >0,9

CRI ≥80

38°

50/60 Hz

IK06


+40°C
-20°C

CCT SWITCH



New


Tao recessed



Technical Information

Power	10W
Driver	25-42vdc / 250mA
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	590 lm / 740 lm / 680 lm
Material	Aluminium
Finishes	White / Black

Code	○ 5718
	● 5719
	①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

 CRI >90



32° 

50/60 Hz



 +50°C
-20°C



 CCT SWITCH

 1/30



Noi recessed

Noi dimm recessed



Technical Information


Power	14W	14W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	1.320 lm	1.100 lm / 1.320 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White

Code	○ 5019
------	--------

○ 3.000K	3485
○ 4.000K	3486

100/277 VAC | CCT SWITCH

220/240 VAC | TRIAC DIMM



3 YEARS WARRANTY

25.000 HOURS

IP 40

PF >0,9

CRI ≥80

100°

50/60 Hz

+40°C
-20°C




1/6



Mini Thessis recessed

Thessis recessed


Thessis XL recessed



Technical Information

Power	15W	25W	35W
Driver	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm	3.100 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black	White

Code	○ 4766	○ 4236	○ 5030
	● 4987	● 4988	①  Custom RAL
	①  Custom RAL	①  Custom RAL	
UGR <19  1/10		UGR <19  1/6	



① Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

 → 

IP 40

220/240 VAC

PF >0,9

CRI ≥85

 90°

50/60 Hz

 IK06





+40°C
-20°C


 CCT SWITCH



Mini Thessis dimm
recessed



Thessis dimm recessed




Technical Information

Power	15W	25W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black

Code	○ 4767	○ 4691
	● 5574	● 5575
	①  Custom RAL	①  Custom RAL

1/10

1/6



① Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

 → 

IP 40

220/240 VAC

UGR <19

PF >0,9

CRI ≥85

 90°

50/60 Hz

 IK06




TRIAC DIMM

 +40°C
-20°C

 CCT SWITCH



Air recessed



Technical Information

Power	22W
Driver	DOB
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.200 lm
Material	Polybutylene and Polycarbonate
Finishes	White
Code	○ 5018



3 YEARS WARRANTY

25.000 HOURS

IP 40

100/277 VAC

PF >0,9

CRI ≥80

100°

50/60 Hz


+40°C
-20°C

CCT SWITCH

1/6




Bonn recessed

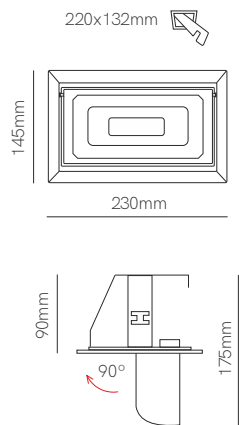

Technical Information

Power	40W
Driver	42vdc / 850mA
Installation	Recessed
Color Temperature	3.000K / 4.100K
Lumens	4.750 lm / 4.800 lm
Material	Aluminium
Finishes	White / Gray
Code	☐ 3.000K 4097 ☐ 4.100K 4096 ☐ 3.000K 4099 ☐ 4.100K 4098 ①  Custom RAL



① Consult delivery terms and conditions.

5 YEARS WARRANTY

30.000 HOURS





IP 20

220/240 VAC

PF >0,9

CRI ≥80



100°

50/60 Hz





+40°C


-20°C

1/12




Fijo recessed






Basculante recessed





Eclipse recessed





*G5.3 Bulbholder included.



Technical Information			
Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Gray / Brushed chrome	White / Gray / Brushed chrome	Gray / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3	50mm G5.3
Code	☐ 206280M	☐ 205280M	☐ 222230
	☐ 206284AL	☐ 205284AL	☐ 222238
	☐ 206285AL	☐ 205285AL	☒  Custom RAL
	☒  Custom RAL	☒  Custom RAL	

Accessories



Bulbholder GU10

☐ 301182



 Consult delivery terms and conditions.

3 YEARS
WARRANTY

|


IP
20

|



1/50



One recessed



Zio recessed



*GU10 Bulbholder included, except 258226C and 257226C.

Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Brushed alumin.	White / Black / Brushed alumin.
Bulbholder	50mm GU10	50mm GU10
Code	○ 4478	□ 4476
	● 4479	■ 4477
	● 258226C	■ 257226C
	①  Custom RAL	①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS
WARRANTY

| IP
20

| 1/50






Luk r recessed



Luk r recessed IP



Luk sq recessed IP



*IP20 includes GU10 Bulbholder, IP65 includes G5.3 Bulbholder.



Technical Information

Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10	50mm G5.3	50mm G5.3
Code	○ 4758	○ 5214	□ 5216
	● 4759	● 5215	■ 5217
	①  Custom RAL	①  Custom RAL	①  Custom RAL
	IP 20	IP 65	IP 65



① Consult delivery terms and conditions.







Bathroom recessed



Rok recessed



*G5.3 Bulbholder included.



Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Brushed aluminium	White / Black / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3
Code	223232	4755
	223233	4756
		4757
		Custom RAL
	IP 44	IP 65



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY



1/50



Avant r recessed



Avant sq recessed



*GU10 Bulbholder included.



Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	111mm GU10	111mm GU10
Code	○ 4486 ● 4487 🌈 Custom RAL	□ 4484 ■ 4485 🌈 Custom RAL



① Consult delivery terms and conditions.






Surface


SURFACE



Nano Golf surface




Mini Golf surface

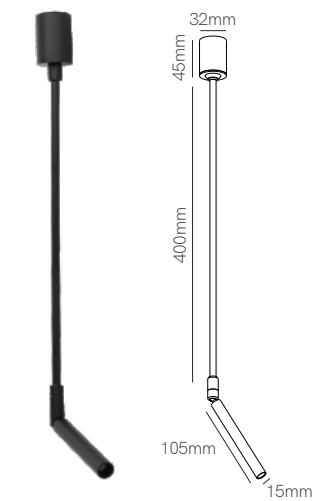

Technical Information

Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 2.700K 5285 ○ 3.000K 5286 ○ 4.000K 5287 ● 2.700K 5288 ● 3.000K 5289 ● 4.000K 5290	○ 2.700K 5291 ○ 3.000K 5292 ○ 4.000K 5293 ● 2.700K 5294 ● 3.000K 5295 ● 4.000K 5296



3 YEARS
WARRANTY

35.000
HOURS

IP
20

220/240
VAC

UGR
<19

PF
>0,5

CRI
≥90


24°

50/60
Hz


+40°C
-20°C

1/10

Golf surface

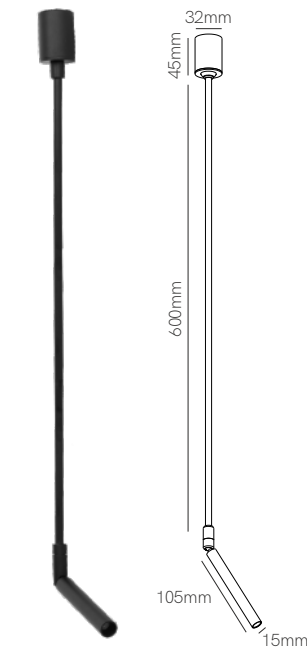


Golf XL surface

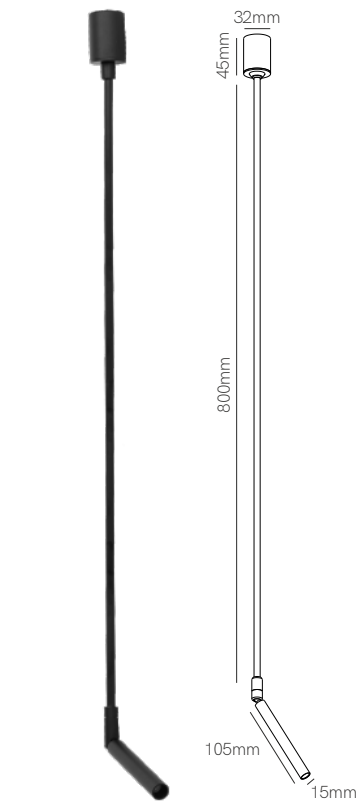


Technical Information

Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 2.700K 5297 ○ 3.000K 5298 ○ 4.000K 5299 ● 2.700K 5300 ● 3.000K 5301 ● 4.000K 5302 ○ 2.700K 5303 ○ 3.000K 5304 ○ 4.000K 5305 ● 2.700K 5306 ● 3.000K 5307 ● 4.000K 5308	






Mini Bora surface




Bora surface




Technical Information

Power	4,5W	8,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold
Code	○ 2.700K 4621 ○ 3.000K 4622 ● 2.700K 4623 ● 3.000K 4624 ● 2.700K 4625 ● 3.000K 4626 ● 2.700K 4627 ● 3.000K 4628 UGR <10 PF >0,5 38°	○ 2.700K 4629 ○ 3.000K 4630 ● 2.700K 4631 ● 3.000K 4632 ● 2.700K 4633 ● 3.000K 4634 ● 2.700K 4635 ● 3.000K 4636 UGR <15 PF >0,6 36°






Alp surface



Technical Information

Power	4,5W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	220 lm
Material	Aluminium
Finishes	White / Black

Code	○	2.700K	5357
	○	3.000K	5358
	●	2.700K	5360
	●	3.000K	5361



3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,5

CRI ≥90

36°


50/60 Hz

+40°C
-20°C

1/18




Plus surface



Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.040 lm
Material	Aluminium
Finishes	White / Black

Code	○ 4522
	● 4523
	①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥80



15°
35°
60°









50/60 Hz



+45°C
-20°C



CCT SWITCH



1/20



▶ VIDEO




Mini Concord surface

Concord surface



Technical Information

Power	7W	14W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm	1.205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 4334-N ● 4335-N ①  Custom RAL CRI ≥80 	○ 5071 ● 5072 ①  Custom RAL  CRI ≥97 



① Consult delivery terms and conditions.






Mini Rubyc surface

Rubyc surface



Technical Information

Power	7W	14W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm	1.205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4332-N ☒ 4333-N Custom RAL	☐ 5069 ☒ 5070 Custom RAL
	CRI ≥80 1/30	CRI ≥97 1/4/12



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

PF >0,9

40°


50/60 Hz

+40°C

-10°C



TRIAC DIMM

CCT SWITCH

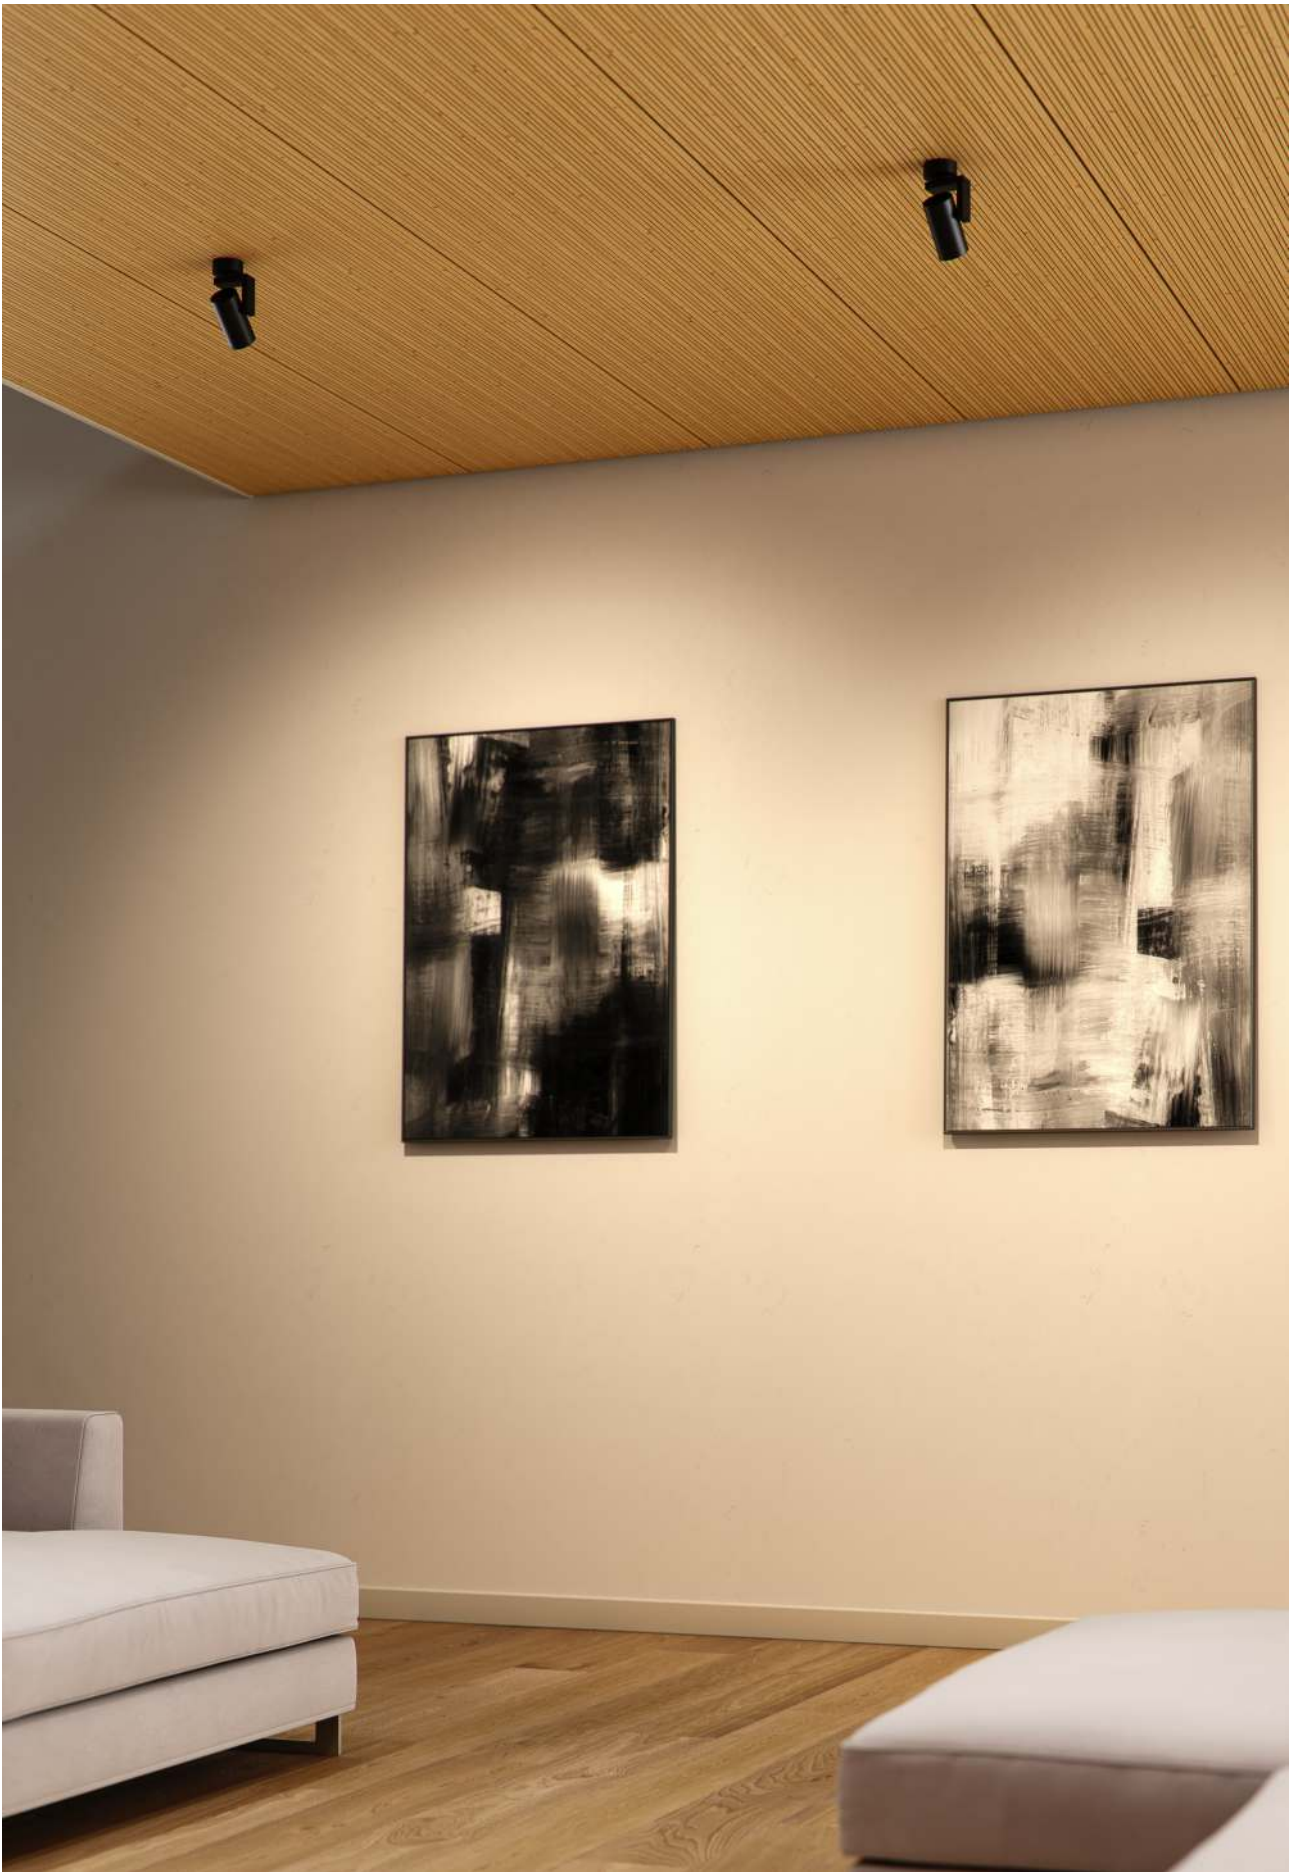

Volt r base

Volt sq base

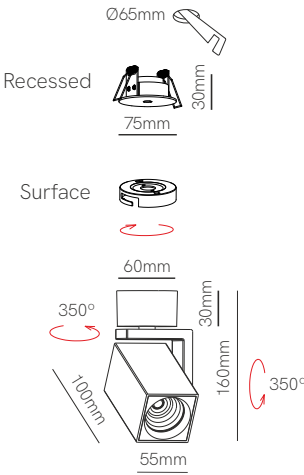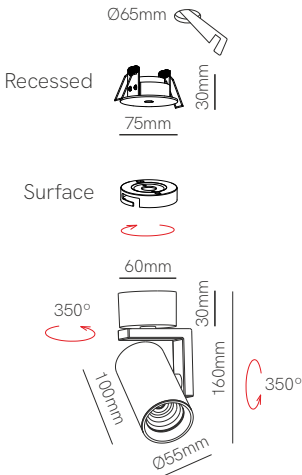


*Included surface base (mounted) and recessed base (not mounted).



Technical Information

Power	8W	8W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5041	☐ 5043
	☒ 5042	☒ 5044
	Custom RAL	Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

→

IP 20

100/277 VAC

PF >0,9

CRI ≥90

38°

50/60 Hz

+45°C
-20°C

CCT SWITCH



1/20



Volt r3 surface




Volt sq3 surface



Technical Information

Power	24W	24W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.700 lm	1.700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 5045 ● 5046 ①  Custom RAL	□ 5047 ■ 5048 ①  Custom RAL





① Consult delivery terms and conditions.



Volt r GU10 base

Volt sq GU10 base

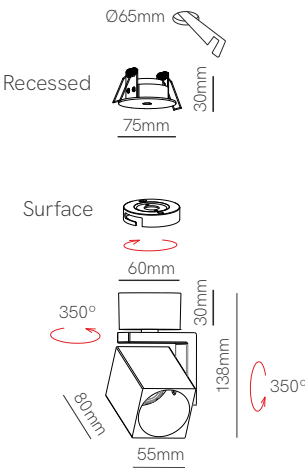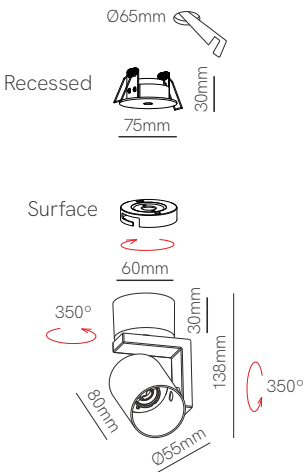

*Included surface base (mounted) and recessed base (not mounted).

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)
Code	○ 5049 ● 5050 ①  Custom RAL	□ 5051 ■ 5052 ①  Custom RAL





① Consult delivery terms and conditions.



Volt r3 GU10 surface



Volt sq3 GU10 surface



Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)
Code	○ 5053 ● 5054 ①  Custom RAL	□ 5055 ■ 5056 ①  Custom RAL




① Consult delivery terms and conditions.





Piccolo base

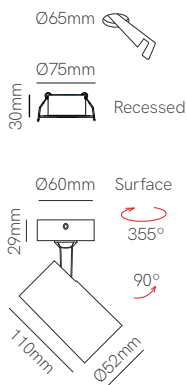

Technical Information

Power	9,5W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 4833-N
	☐ 4834-N
	☒ Custom RAL





ⓘ Consult delivery terms and conditions.
*Surface and recessed base included.

3 YEARS WARRANTY	30.000 HOURS	IP 20	220/240 VAC	UGR <19	PF >0,9	CRI ≥90	15° 38° 60°	50/60 Hz	+50°C -20°C	CCT SWITCH	1/20
------------------	--------------	-------	-------------	---------	---------	---------	-------------	----------	-------------	------------	------



Piccolo GU10 surface

Piccolo AR111 surface

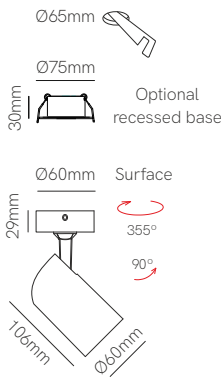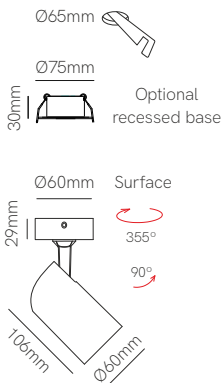

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White
Bulbholder	50mm GU10 (except Power bulb)	111mm GU10
Code	○ 4050 ● 4049 ①  Custom RAL	○ 4433 ①  Custom RAL

① Consult delivery terms and conditions.

Accessories



Recessed base (not included)

○ 4835 ● 4836



*GU10 bulbholder included.

5 YEARS WARRANTY

IP 20



220/240 VAC






▶ VIDEO




Crown base

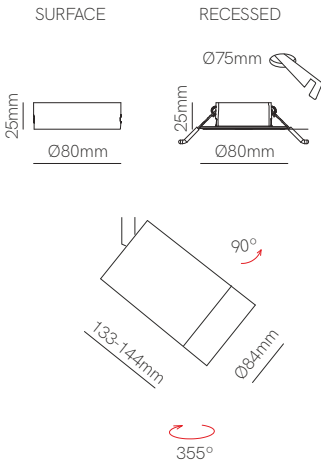

Technical Information

Power	25W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.300 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	○ 5224 ● 5225




Includes surface and recessed base (not mounted).






Mini Kora r surface



Kora r surface



Technical Information


Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	○ 4832	○ 4500-V2

CE RoHS  


3 YEARS WARRANTY | 25.000 HOURS |  →  | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 |  120° | 50/60 Hz |  IK08 |  +45°C / -25°C |  CCT SWITCH | 1/5



Mini Kora sq surface



Kora sq surface



Technical Information

Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 4831	☐ 4499-V2


CE RoHS  

3 YEARS WARRANTY | 25.000 HOURS |   | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 |  | 120°  | 50/60 Hz |  IK08 |  +45°C -25°C |  CCT SWITCH |  1/5



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa S.L. Photography: David Rodriguez.

Nox surface



Technical Information

Power	30W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.460 lm
Material	Aluminium
Finishes	White / Black

Code	4241-N
	4242-N
	Custom RAL

Consult delivery terms and conditions.


Accessories



Included with:
4241-N



Included with:
4241-N / 4242-N



3 YEARS
WARRANTY

30.000
HOURS

IP
20

220/240
VAC

UGR
<19

PF
>0,9

CRI
≥94

15°
24°
40°

50/60
Hz


+50°C
-20°C

CCT
SWITCH


1/8




One surface



Zio surface



Avant r surface



*GU10 Bulbholder included.



Technical Information

Installation	Surface	Surface	Surface
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)	111mm GU10
Code	○ 4480	□ 4482	○ 4933
	● 4481	■ 4483	● 4934
	①  Custom RAL	①  Custom RAL	①  Custom RAL
	1/20	1/20	1/10



① Consult delivery terms and conditions.







Suspension

Create your own design with **Space**

Space is a lighting concept that seeks to be part of the design and finishes of a room. This lighting system creates an unlimited number of lines and compositions that are born out of a surface base. The final design is left to the user, who can select and customize the distribution of the luminaire in the space.

Space es un concepto de iluminación que busca formar parte del diseño y acabados de un espacio. Este sistema de iluminación crea trazos y composiciones ilimitadas que nacen de una base de superficie. El diseño final queda en manos del usuario, el cual puede escoger y personalizar como distribuye la luminaria a través del espacio.



This innovative system allows you to create spectacular vertical suspended compositions by means of a unique and incomparable design. With our decorative spotlights it is possible to create entirely customizable light points at different heights. The Space system, supported by a thread up to six meters long, is compatible with Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL and Lievo XL decorative products. Choose the size of the base that best suits the composition among different diameters and create your own luminaire.

Este innovador sistema permite crear composiciones colgantes verticales espectaculares a través de un diseño único e irrepetible. Con nuestros spotlights decorativos es posible crear puntos de luz a distintas alturas totalmente personalizables. El sistema Space, sostenido por un hilo de hasta seis metros de largo, es compatible con los productos decorativos Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL y Lievo XL. Escoge el tamaño de la base que mejor se adapte a la composición entre distintos diámetros y crea tu propia luminaria.




The light points of the Space system can be moved away from the base and brought to any place desired through the wire holder. It is a piece that is mounted on the surface of the ceiling to support the conductor wire of the lighting structure. This system of hanging lamps gives total freedom to architects and interior designers to create repetitions of light that can compose from chaotic structures to the most symmetrical. If you have a false ceiling where the driver can rest, you can use the system with the individual recessed base, a great option for integrating the structure in an elegant way.

Los puntos de luz del sistema Space pueden alejarse de la base y llevarse a cualquier ubicación deseada a través del wire holder. Se trata de una pieza que se instala en la superficie del techo para sostener el hilo conductor de la estructura lumínica. Este sistema de lámparas colgantes ofrece una total libertad a arquitectos e interioristas para crear repeticiones de luz que pueden componer desde estructuras caóticas, hasta las más simétricas. En caso de contar con un falso techo donde pueda reposar el driver, puedes usar el sistema con la base individual de encastrar, una muy buena opción para integrar de forma elegante la estructura.



New

Sphere space



Technical Information

Power	8W
V / I in	36-48vdc / 200mA
Installation	Surface / Recessed
Color Temperature	2.700K / 3.000K
Lumens	255 lm
Material	Aluminium and glass
Finishes	White / Black
Code	○ 2.700K 7017 ○ 3.000K 7018 ● 2.700K 7019 ● 3.000K 7020

Accessories




Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



3 YEARS
WARRANTY

30.000
HOURS

 → 

IP
20

UGR
<19



CRI
≥90



Nano
base



Side/front
base

360°



+40°C
-20°C



1/12

New

Mini Hat space

Hat space



Technical Information

Power	8W	8W
V / I in	36-48vdc / 200mA	36-48vdc / 200mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	800lm	835 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○ 2.700K 7009	○ 2.700K 7013
	○ 3.000K 7010	○ 3.000K 7014
	● 2.700K 7011	● 2.700K 7015
	● 3.000K 7012	● 3.000K 7016
70°   1/10		83°   1/5

Accessories





Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129




Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



New

Cookie space



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	12W
V / I in	25-40vdc / 300mA
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 7007
	☐ 7008
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories




Holder space
☐ 5106
☒ 5107



Wire space (1m)
☐ 5128
☒ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



3 YEARS WARRANTY

30.000 HOURS

IP 20

UGR <19

CRI ≥90

Nano base

Side / front base

38°

50/60 Hz

+40°C
-20°C

CCT SWITCH

1/20

New

Atmos slim space



Technical Information

Power	6W
V / I in	25-42vdc / 120mA
Installation	Surface / Recessed
Color Temperature	2.700K / 3.000K
Lumens	380 lm / 415 lm
Material	Aluminium
Finishes	White / Black

Code	○ 2.700K	7021
	○ 3.000K	7022
	● 2.700K	7023
	● 3.000K	7024

Accessories




Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



3 YEARS WARRANTY

26.000 HOURS

IP 20

UGR <19

CRI ≥90

Nano base

Side / front base

36°

+40°C
-20°C

1/24

New

Ark space




Black-gray



Black-transp.



White-transp.



Technical Information

Power	6W
V / I in	25-42vdc / 500mA
Installation	Surface / Recessed
Color Temperature	2.700K / 3.000K
Lumens	350 lm / 360 lm
Material	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray

Code	7001  White-transp. 2.700K
	7002  White-transp. 3.000K
	7003  Black-transp. 2.700K
	7004  Black-transp. 3.000K
	7005  Black-gray 2.700K
	7006  Black-gray 3.000K

Accessories




Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm





Nano Alp space

Alp space



*Base not included. You need to choose a base to complete the installation.



Technical Information

Power	5W	5W
V / I in	20-42vdc / 120mA	20-42vdc / 120mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm	370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○ 5096	○ 5098
	● 5097	● 5099
	① Custom RAL	① Custom RAL

① Consult delivery terms and conditions.

Accessories



Nano surface base
Ø75x33mm
○ 5114
● 5115



Nano recessed base
Ø90x22mm / Ø80mm
○ 5116
● 5117




Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY

30.000 HOURS

IP 20

100/277 VAC

UGR <19

PF >0,9

CRI ≥93

Nano base

Side / front base

45°

50/60 Hz

+45°C
-20°C

CCT SWITCH

1/60



Bora space



Bora XL space



*Base not included.
You need to choose a base to complete the installation.



Technical Information

Power	8W	15W
V / I in	20-55vdc / 150mA	20-42vdc / 350mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ ● 5084 5085 Custom RAL	○ ● 5086 5087 Custom RAL

1/30

1/20

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)




Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS
WARRANTY

30.000
HOURS

IP
20

100/277
VAC

UGR
<19

PF
>0,9

CRI
≥93

Nano
base

Side / front
base

38°

50/60
Hz

+45°C
-20°C

CCT
SWITCH



Lievo space

Lievo XL space



*Base not included.
You need to choose a base to complete the installation.



Technical Information

Power	8W	15W
V / I in	20-55vdc / 150mA	20-42vdc / 350mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ ● 🌈 5088 5089 Custom RAL	○ ● 🌈 5090 5091 Custom RAL

1/30

1/12

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / 🔑 Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY

30.000 HOURS

IP 20

100/277 VAC

UGR <19

PF >0,9

CRI ≥93

 Nano base

 Side / front base

38°

50/60 Hz

 +45°C
-20°C

 CCT SWITCH



Laguarda Ramos Dental Studio, Las Palmas de Gran Canaria (Spain). Architecture: Room C Studio. Photography: Miriam Ruano Carreño.



*Base not included.
You need to choose a base to complete the installation.



Technical Information

Power	8W	15W
V / I in	20-55vdc / 150mA	20-42vdc / 350mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	△ 5092 ▲ 5093 🌈 Custom RAL	△ 5094 ▲ 5095 🌈 Custom RAL

1/30

1/12

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / 80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY

30.000 HOURS

IP 20

100/277 VAC

UGR <19

PF >0,9

CRI ≥93

 Nano base

 Side / front base

38°

50/60 Hz

 +45°C
-20°C

 CCT SWITCH



Space - Side base

Side base

Base Ø250x41mm



Code	
Code	S1

Product		Units	
Bora	1	2 units	2
Zoe	3	3 units	3
Lievo	5	4 units	4
Alp / Atmos	7	5 units	5
Nano Alp	8	6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
🌈 Custom RAL	3

Code: **S1**

Base Ø280x41mm



Code	
Code	S2

Product		Units	
Bora	1	2 units	2
Zoe	3	3 units	3
Lievo	5	4 units	4
Alp / Atmos	7	5 units	5
Nano Alp	8	6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
🌈 Custom RAL	3

Code: **S2**

Base Ø330x41mm



Code	
Code	S3

Product		Units	
Bora	1	2 units	2
Bora XL / Sphere	2	3 units	3
Zoe	3	4 units	4
Zoe XL / Hat	4	5 units	5
Lievo	5	6 units	6
Lievo XL / Mini Hat	6	7 units	7
Alp / Atmos	7	8 units	8
Nano Alp	8		
Ark / Cookie	9		

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
🌈 Custom RAL	3

Code: **S3**

ⓘ Consult delivery terms and conditions.



Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129



*Create your code according to your preferences. For other finishing please consult.





Space - Front base

Front base

Base Ø250x41mm



Code	
Code	F1

Product	Units
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
Custom RAL	

Code: **F1**

Base Ø280x41mm



Code	
Code	F2

Product	Units
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
Custom RAL	

Code: **F2**

Base Ø330x41mm



Code	
Code	F3

Product	Units
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8
	7 units
	8 units

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
Custom RAL	

Code: **F3**

Base Ø330x41mm



Code	
Code	F3

Product	Units
Bora XL / Sphere	2
Zoe XL / Hat	4
Lievo XL / Mini Hat	6
Ark / Cookie	9

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
Custom RAL	

Code: **F3**

ⓘ Consult delivery terms and conditions.



Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129



*Create your code according to your preferences. For other finishing please consult.





Ark suspension surface

Ark suspension recessed





Black-gray



White-transp.



Black-transp.



Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes


6W
Surface
2.700K / 3.000K
350 lm / 360 lm
Aluminium and acrylic
White-transparent / Black-transparent / Black-gray

6W
Recessed
2.700K / 3.000K
350 lm / 360 lm
Aluminium and acrylic
White-transparent / Black-transparent / Black-gray

Code

4814		White-transp.	2.700K
4815		White-transp.	3.000K
4816		Black-transp.	2.700K
4817		Black-transp.	3.000K
4818		Black-gray	2.700K
4819		Black-gray	3.000K

4808		White-transp.	2.700K
4809		White-transp.	3.000K
4810		Black-transp.	2.700K
4811		Black-transp.	3.000K
4812		Black-gray	2.700K
4813		Black-gray	3.000K



3 YEARS WARRANTY

26.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,5

CRI ≥90

90°

50/60 Hz



+40°C
-20°C

1/12



Atmos slim suspension

Atmos slim XL suspension

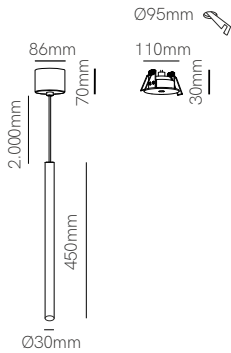

*Need Tuya Smart App to work.



Technical Information


Power	6W	6W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Tuya 2.700K - 4.000K	Tuya 2.700K - 4.000K
Lumens	460 lm	460 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	○ 4930 ● 4931 ● 4932 🌈 Custom RAL	○ 4750 ● 4751 ● 4752 🌈 Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi
□ 4956




*See page 324 for Gateway additional info.
*All versions included surface base (mounted) and recessed base (not mounted).





Atmos suspension

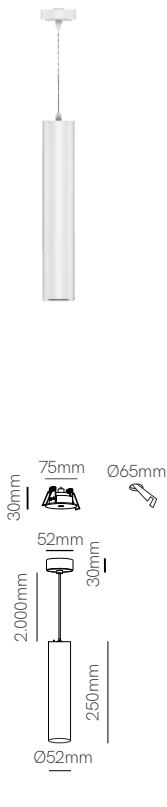

Atmos XL suspension



Technical Information

Power	7W	10W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	4461-N 4462-N 4952-N Custom RAL 1/8	4463-N 4464-N 4953-N Custom RAL 1/4

ⓘ Consult delivery terms and conditions.


Accessories



Included with:
4461 / 4463



Included with:
4461 / 4462 / 4463 / 4464



*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥90

15° 38° 60°

50/60 Hz

+50°C -20°C


CCT SWITCH



Atmos GU10 suspension



Atmos GU10 XL suspension

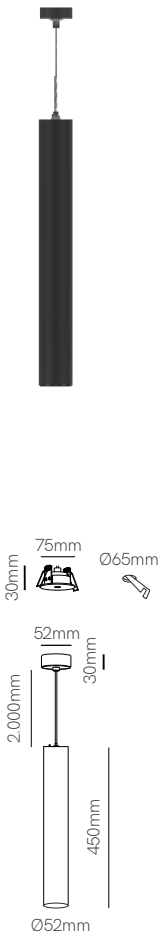

*All versions included surface base (mounted) and recessed base (not mounted).



Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)
Code	☐ 4465	☐ 4467
	☒ 4466	☒ 4468
	☐ 4954	☐ 4955
	☒ Custom RAL	☒ Custom RAL
	1/8	1/4




① Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | 220/240 VAC |



Zoe suspension surface



Zoe suspension recessed



Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes


7W
Surface
2.700K / 3.000K
360 lm / 370 lm
Aluminium
White / Black

7W
Recessed
2.700K / 3.000K
360 lm / 370 lm
Aluminium
White / Black


Code

△	2.700K	4803
△	3.000K	4804
▲	2.700K	4805
▲	3.000K	4806

△	2.700K	4799
△	3.000K	4800
▲	2.700K	4801
▲	3.000K	4802






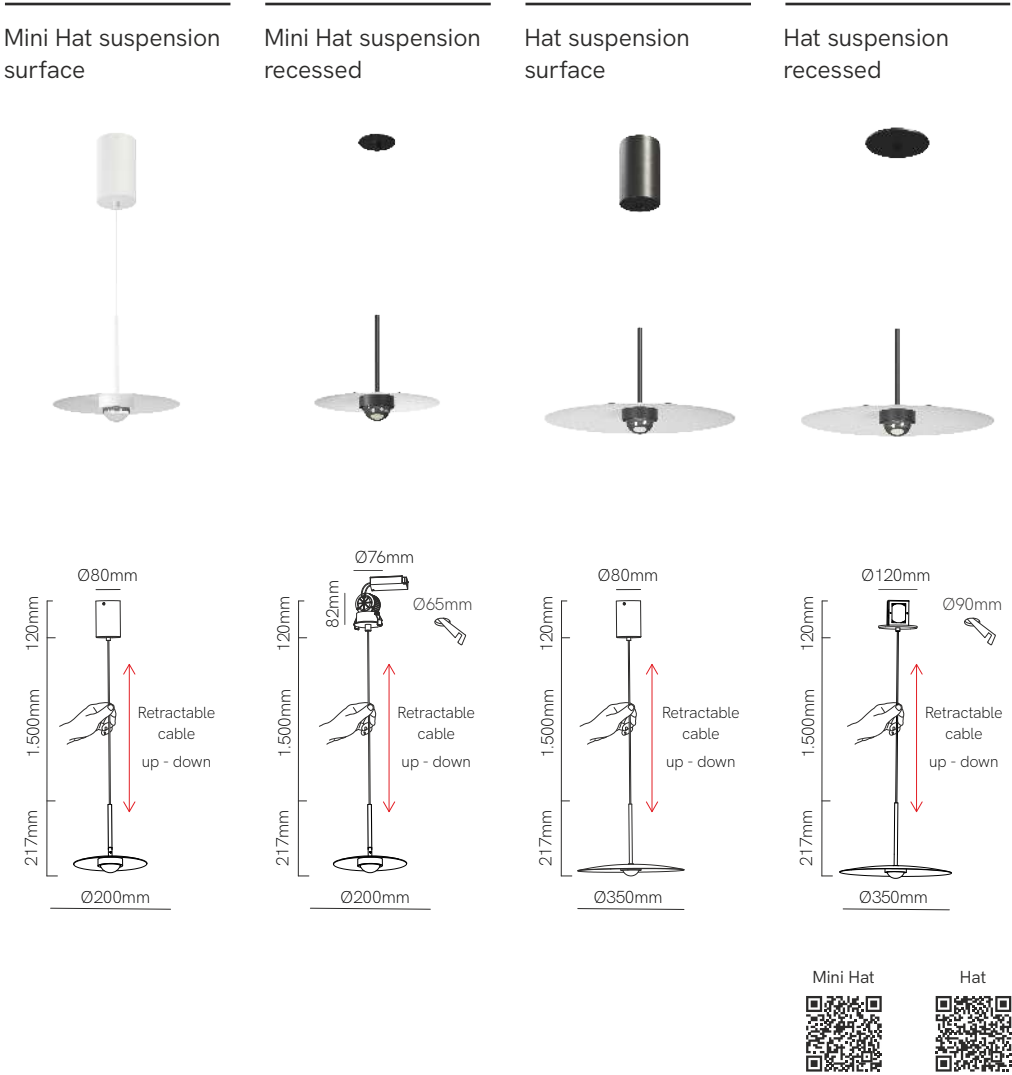

Technical Information

Power	8W	8W	8W	8W
Installation	Surface	Recessed	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	800lm	800lm	835 lm	835 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black	White / Black

Code	○ 2.700K	5710	○ 2.700K	5706	○ 2.700K	5345	○ 2.700K	5351
	○ 3.000K	5712	○ 3.000K	5708	○ 3.000K	5346	○ 3.000K	5352
	● 2.700K	5711	● 2.700K	5707	● 2.700K	5348	● 2.700K	5354
	● 3.000K	5713	● 3.000K	5709	● 3.000K	5349	● 3.000K	5355
70°					70°			
83°					83°			



3 YEARS WARRANTY

30.000 HOURS



IP 20

220/240 VAC

PF >0,6




50/60 Hz




+40°C
-20°C



Bora suspension surface




Bora suspension recessed



Technical Information


Power	8,5W	8,5W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	530 lm / 540 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code	○	2.700K	4605	○	2.700K	4613
	○	3.000K	4606	○	3.000K	4614
	●	2.700K	4607	●	2.700K	4615
	●	3.000K	4608	●	3.000K	4616
	●	2.700K	4609	●	2.700K	4617
	●	3.000K	4610	●	3.000K	4618
	●	2.700K	4611	●	2.700K	4619
	●	3.000K	4612	●	3.000K	4620





Cookie suspension base

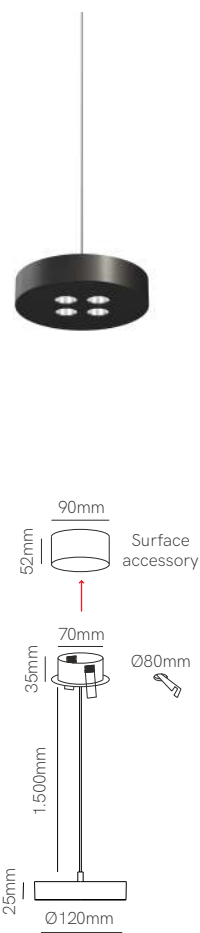


*Includes surface and recessed base.



Technical Information

Power	12W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5183
	☒ 5184
	☐ Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

IP 20

100/277 VAC

UGR <19

PF >0,9

CRI ≥90

38°

50/60 Hz

TRIAC DIMM

+40°C
-20°C

CCT SWITCH







1/20



Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié Il·luminació. Architecture: Pablo Amorós.

Tot suspension / surface

Tot XL suspension / surface

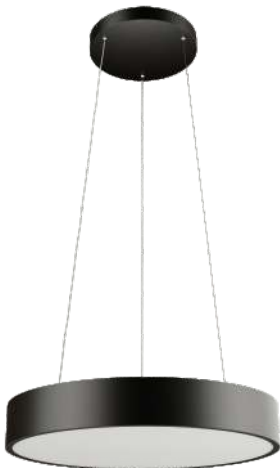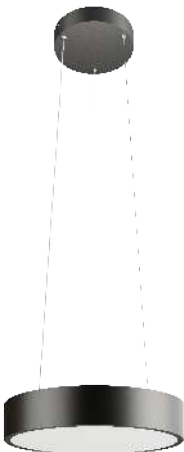

*Need Tuya Smart App to work.



Technical Information

Power	40W	60W
Installation	Surface / Pendant	Surface / Pendant
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.400 lm	5.900 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	● 4903 ①  Custom RAL	● 4905 ①  Custom RAL

① Consult delivery terms and conditions.


Accessories



Gateway Wifi



□ 4956



*See page 324 for Gateway additional info.











Lao



Recessed box included
66mm x Ø73mm




White and black cover included




*Recessed box, white and black cover included.

Technical Information

Power	1,5W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	20 lm
Material	Aluminium
Finishes	White / Black
Code	☐ ☐ 5027
	☒ Custom RAL





① Consult delivery terms and conditions.








Ilo



Skin




*Recessed box included.



Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.000K	3.000K
Lumens	60 lm	60 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4126	☐ 4108
	☒ 4127	☒ 4109
	Custom RAL	Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 20

220/240 VAC

PF >0,5

CRI ≥80


120°


50/60 Hz

IK07

+50°C / -20°C


1/50

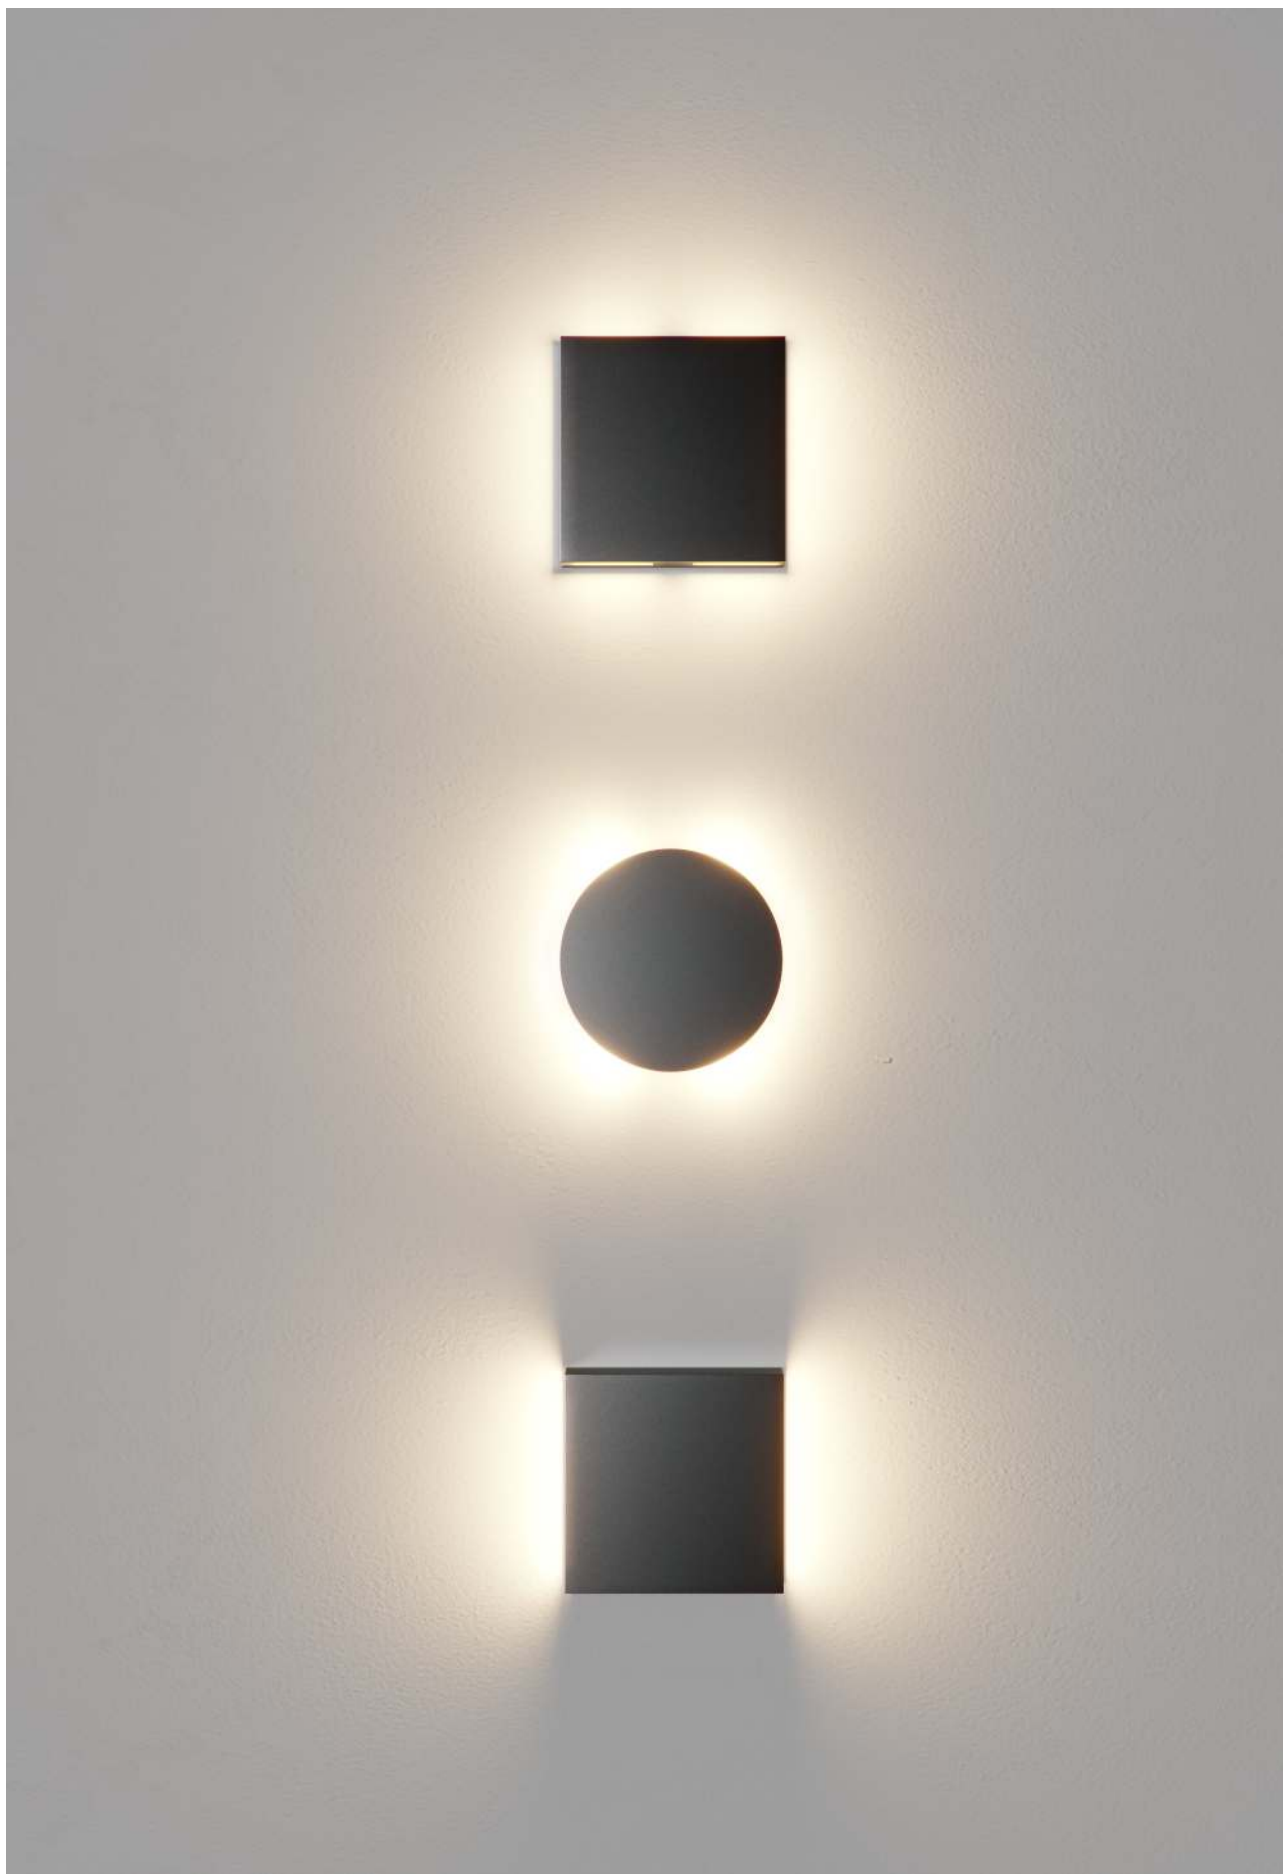

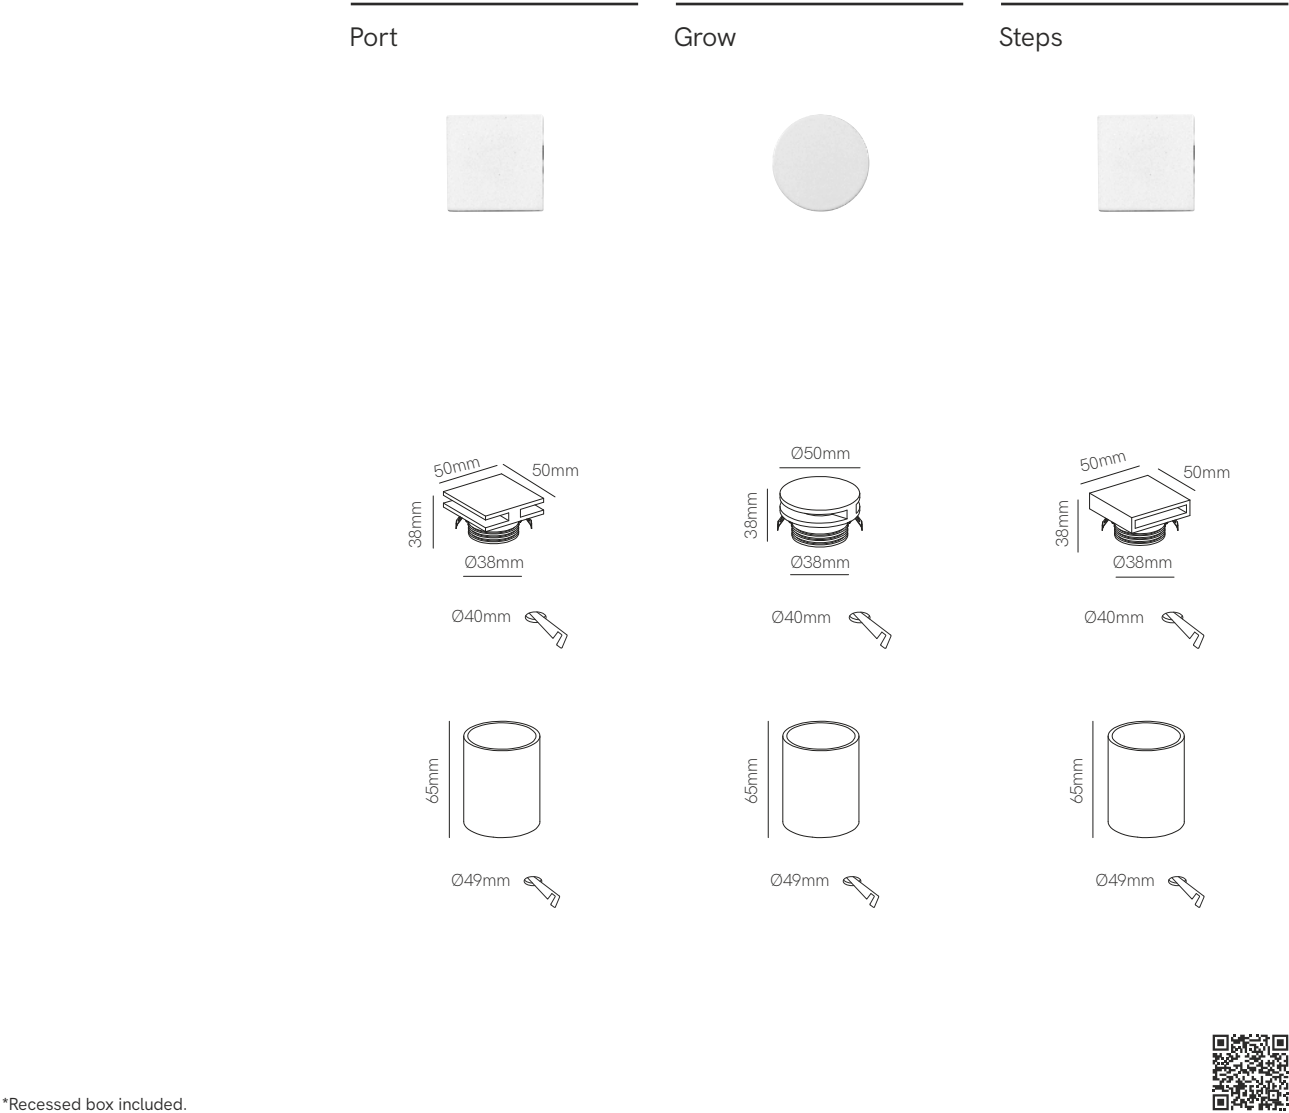


Technical Information

Power	4W	4W	4W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	60 lm	60 lm	60 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 4112	☐ 4106	☐ 4110
	☒ 4113	☒ 4107	☒ 4111
	 Custom RAL	 Custom RAL	 Custom RAL
120° 		120° 	120° 

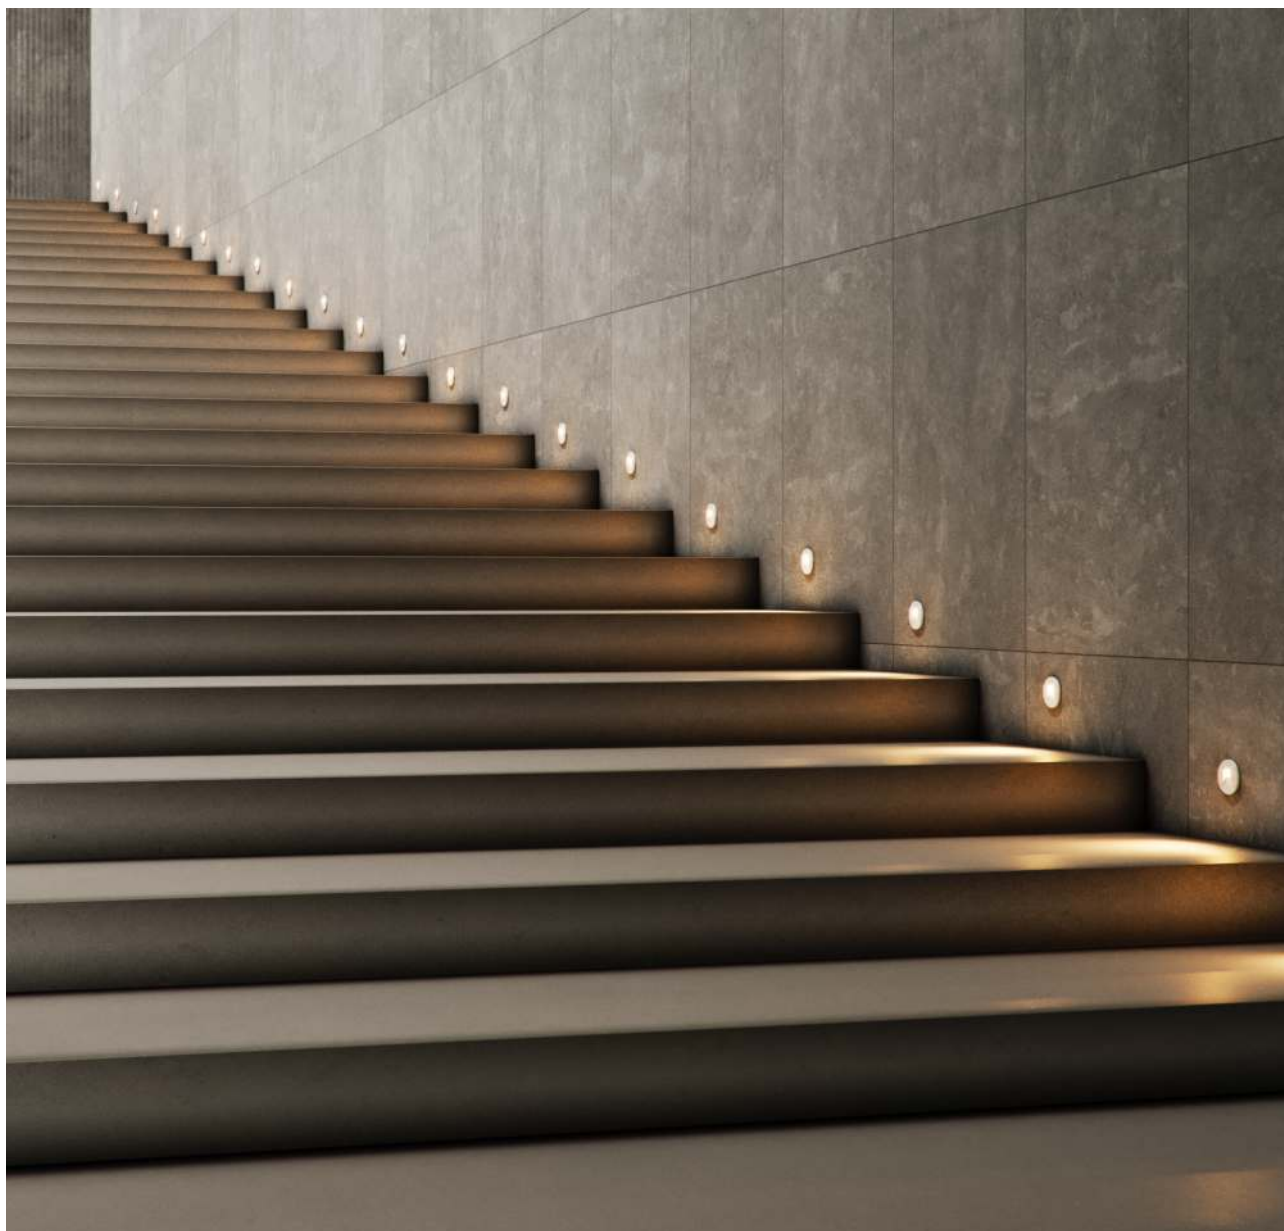

Pun



Recessed box included
66mm x Ø73mm



White and black cover included



Technical Information

Power	3W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	65 lm
Material	Aluminium
Finishes	White / Black
Code	○ ● 5029
	①  Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 20

85/265 VAC

PF >0,4

CRI ≥80



38° 

50/60 Hz

 IK07


 +45°C
-20°C

 CCT SWITCH

 1/50




Pure wall



*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	4W
Installation	Surface
Color Temperature	2.700K
Lumens	155 lm / 80 lm / 40 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5159 ☒ 5160



*Charger by USB.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

PF >0,5

USB-C 5V 2A

CRI ≥90

30°

50/60 Hz


3 INTENSITIES

+40°C
-20°C

1/20




Sweet wall



*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	4W
Installation	Surface
Color Temperature	2.700K
Lumens	150 lm / 90 lm / 40 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5155
	☒ 5156



*Charger by induction and USB.

3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

PF >0,4

USB-C 5V 2A

CRI ≥90

20°

5W

50/60 Hz


3 INTENSITIES

+40°C -20°C

1/10



Beam wall

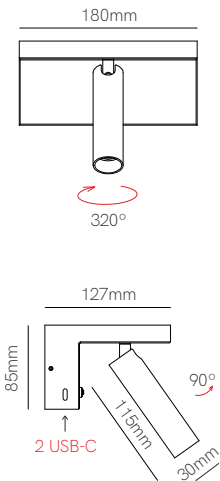

*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	5W
Installation	Surface
Color Temperature	2.700K
Lumens	380 lm / 190 lm / 95 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5157
	☒ 5158



*Charger by USB-C.

5 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥90

40°

50/60 Hz

USB-C 5V 2A

3 INTENSITIES

+40°C
-20°C



1/12



Mini Icon wall




Icon wall



Technical Information

Power	7W	12W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.320 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	☐ 4383 ☒ 4384 ☐ 4385  Custom RAL	☐ 4386 ☒ 4387 ☐ 4388  Custom RAL


☐☒ Custom RAL

① Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,5 | CRI >90 | 120° | 50/60 Hz | +50°C / -20°C | CCT SWITCH | 1/12



Tron




Technical Information

Power	5W / 8W / 16W / 24W
Installation	Surface
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	300 lm - 2.400 lm
Material	Aluminium
Finishes	White / Black

Code	Diffuser	Size (X)	CCT (lm/W) - Power/m		Driver	Colour
Code	9	Opal	7			
		Nano tron 140mm	0	2.700K (60 lm/W) - 29W/m	2	White (9003) 1
		Mini tron 290mm	1	3.000K (65 lm/W) - 29W/m	3	Black (9005) 2
		Tron 590mm	2	4.000K (70 lm/W) - 29W/m	4	Custom RAL C
		Tron XL 870mm	3			

Code: 9 7 4



Consult delivery terms and conditions.
*Create your code according to your preferences.

5 YEARS WARRANTY

50.000 HOURS

IP 40


230 VAC

PF >0,9


CRI ≥95

0,87m Max

TRIAC DIMM

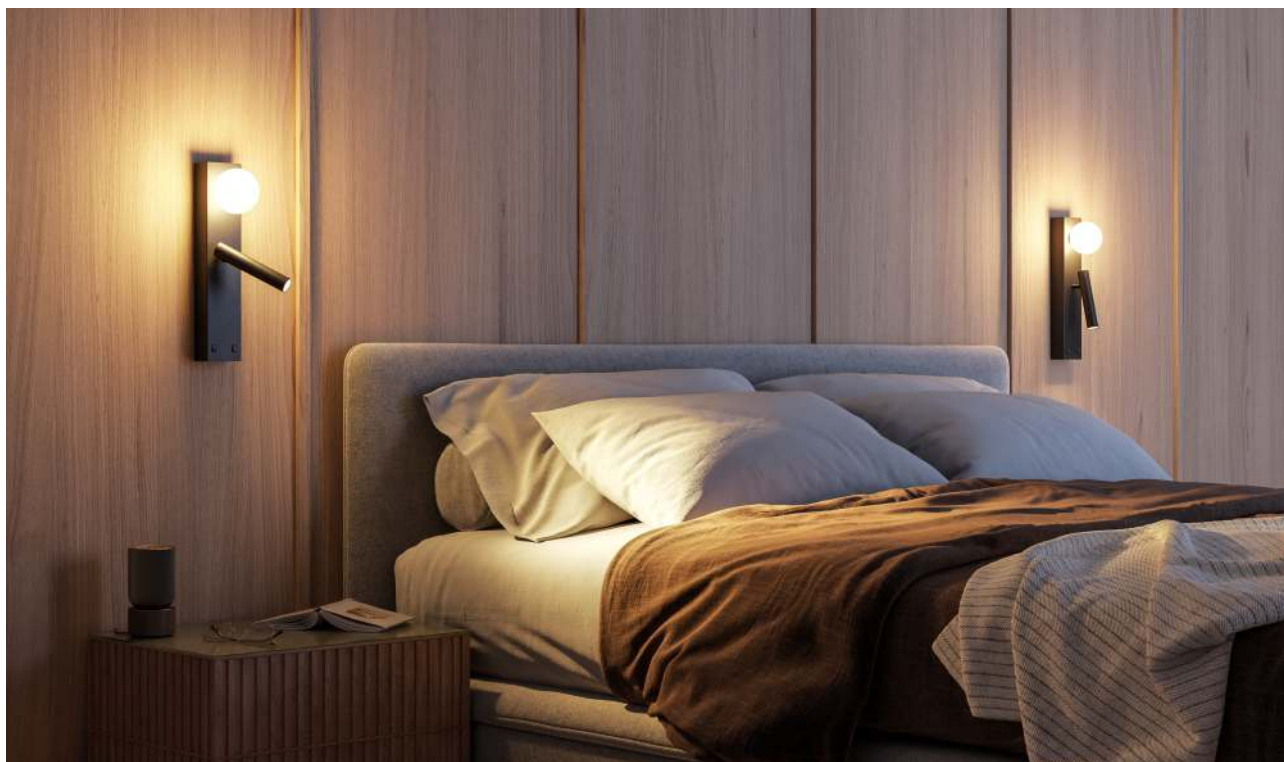

Sphere alp wall

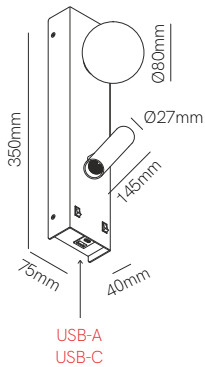

*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	20W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	680 lm
Material	Aluminium and glass
Finishes	White / Black
Code	○ 2.700K 5339 ○ 3.000K 5340 ● 2.700K 5342 ● 3.000K 5343



3 YEARS
WARRANTY

30.000
HOURS

IP
20

X

✗

✓

✓

220/240
VAC

PF
>0,9

UGR
<19

CRI

≥90

⊕

360°

36°

▲

50/60
Hz

⌄


+40°C

-20°C


1/6



One GU10 wall



One GU10 wall dual



*GU10 Bulbholder included, LED lamp not included.



Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)
Code	○ 5006 ● 5007 ● 5008 ①  Custom RAL	○ 5009 ● 5010 ● 5011 ①  Custom RAL




① Consult delivery terms and conditions.






Zio GU10 wall



Zio GU10 wall dual



*GU10 Bulbholder included, LED lamp not included.



Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)
Code	 5012  5013  5014  Custom RAL  5015  5016  5017  Custom RAL	



 Consult delivery terms and conditions.

3 YEARS WARRANTY | DUAL | IP 20 | | 1/20






Portable & table



New

Asti



Technical Information

Power	2W
Installation	Portable
Color Temperature	2.200K
Lumens	130 lm
Material	Aluminium and glass
Finishes	Brushed Gold
Code	 5733

CE RoHS 


3 YEARS WARRANTY |  1 YEARS WARRANTY | 30.000 HOURS |  4 HOURS |  6 HOURS | USB-C 5V |  3.000 mAh | IP 54 |  CRI ≥90 |  | 180° |  |  DIMMABLE |  +50°C -20°C |  1/12



► VIDEO



Bag



Technical Information

Power	2W
Installation	Portable
Color Temperature	3.000K
Lumens	50 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne
Code	☐ 5329
	☒ 5330
	☐ 5331
	☐ 5332



3 YEARS WARRANTY

2 YEARS WARRANTY

30.000 HOURS

2,5 HOURS

3,5 HOURS

USB-C 5V

1.800 mAh

IP 20

CRI ≥90

180°

DIMMABLE

IK06

+40°C
-20°C


1/20



▶ VIDEO



Bimba



Technical Information

Power	2W
Installation	Portable
Color Temperature	Switch 2.000K / 3.100K / 5.000K
Lumens	118 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne
Code	○ 5325 ● 5326 ● 5327 ● 5328



3 YEARS
WARRANTY

🔋

1 YEARS
WARRANTY

9.000
HOURS

🔌

3,5
HOURS

🔌

5
HOURS

USB-C
5V

🔋

3.000
mAh

IP 65

CRI ≥80

⬢

💡

110°

↺

DIMMABLE

🔧

IK04

🌡️

+40°C
-20°C

📶

CCT
SWITCH

👉

1/8



▶ VIDEO



Converse



Technical Information

Power	2,5W
Installation	Portable
Color Temperature	2.700K / 5.000K
Lumens	225 lm
Finishes	White
Code	○ 3916-N

CE RoHS

3 YEARS WARRANTY

2 YEARS WARRANTY

50.000 HOURS

5-6 HOURS

4-150 HOURS

MICRO USB 5V

2.200 mAh

IP 20

CRI ≥82

360°



DIMMABLE

+40°C
-20°C

1/15



Madi



Technical Information

Power	4W
Installation	Portable
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm
Material	Polycarbonate and ABS
Finishes	White
Code	○ 5154

CE RoHS

3 YEARS WARRANTY

2 YEARS WARRANTY

POWER BANK

3-4 HOURS

100% 6-7H
50% 12-15H
SOS 16-18H

USB-C 5V 2A

5.200 mAh

IP 54

CRI ≥80

200°


DIMMABLE

IK08


+40°C
-10°C

CCT SWITCH

1/20

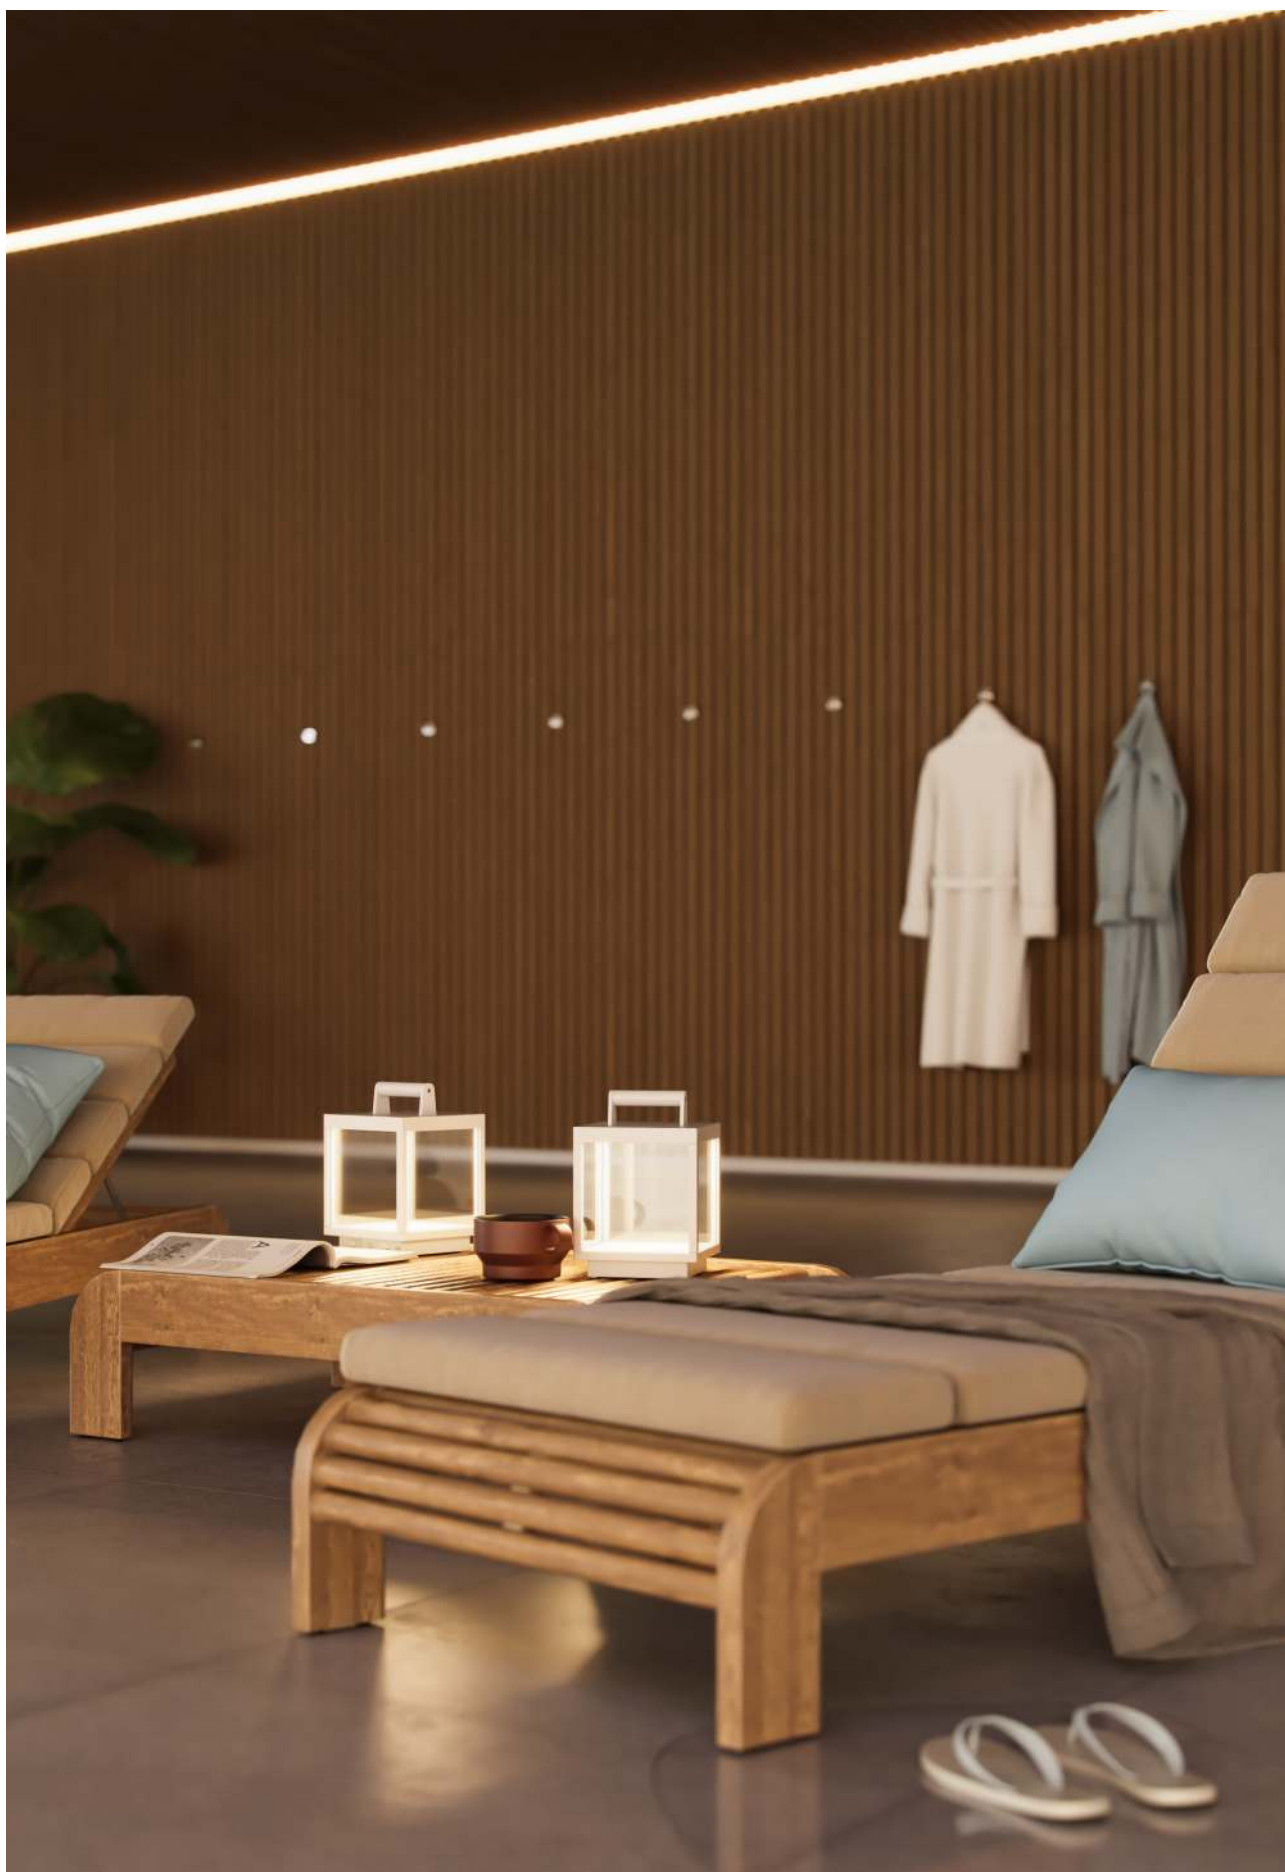

Visor



Technical Information

Power	5W
Installation	Portable
Color Temperature	3.000K
Lumens	460 lm / 230 lm / 46 lm
Material	Aluminium
Finishes	White / Corten
Code	☐ 3929 ☒ 3931



*Charger by USB. Charger included.

3 YEARS WARRANTY

2 YEARS WARRANTY

30.000 HOURS

POWER BANK

6,5 HOURS

5/11/25 HOURS

7.800 mAh

3,7V USB

IP 65

CRI ≥80

120°

IK05



3 INTENSITIES

+45°C -20°C

1/4




Stem



Technical Information

Power	5W
Installation	Table
Color Temperature	2.700K
Lumens	175 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	4979 4981



3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

PF >0,45

CRI ≥90

30°

5W INDUCTION CHARGING

50/60 Hz

IK06

+50°C -20°C

1/20






Outdoor



Polo


Luky

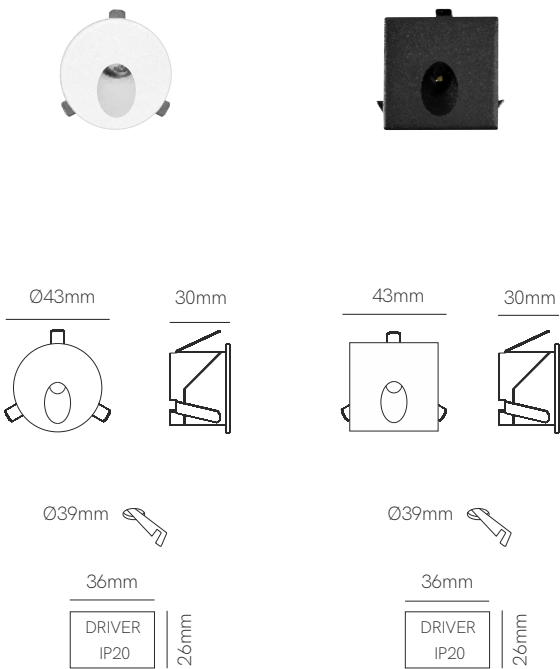


Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.200K / 4.000K	3.200K / 4.000K
Lumens	90 lm / 96 lm	90 lm / 96 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 3.200K 3995 ○ 4.000K 3996 ● 3.200K 3997 ● 4.000K 3998 ①  Custom RAL	□ 3.200K 3999 □ 4.000K 4000 ■ 3.200K 4001 ■ 4.000K 4002 ①  Custom RAL

Accessories



① Consult delivery terms and conditions.





Ina

Dis



Nix



Technical Information

Power	2W	2W	2W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	55 lm	55 lm	55 lm
Material	Inox 304	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox	Brushed Inox
Code	 4367	 4368	 4369
	  1.000Kg	  1.000Kg	  1.000Kg

Accessories



*Recessed box included. Integrated driver.

3 YEARS WARRANTY

50.000 HOURS



IP 67

100/240 VAC

PF >0,4

CRI ≥80



CABLE 50CM

50/60 Hz



IK09



+50°C
-20°C




1/50



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa S.L. Photography: David Rodriguez.

Mis r wall

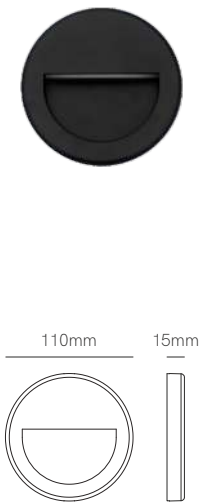

Mis sq wall



Technical Information

Power	3W	3W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	200 lm	140 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	○ 5020 ● 5021 ● 5022 ① Custom RAL	□ 5023 ■ 5024 ■ 5025 ① Custom RAL



*Integrated driver.
① Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 65

220/240 VAC

PF >0,5

CRI ≥80

50/60 Hz

IK06

+40°C
-20°C



CCT SWITCH

1/10/50



Artis r wall

Artis sq wall



Recessed box included
67mm x Ø74mm



Recessed box included
107mm x 73mm x 53mm



Surface box included
54mm x Ø80mm



Surface box included
103mm x 79mm x 57 mm



Technical Information

Power	4,5W	4,5W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	130 lm	130 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White	White
Code	○ 5205	□ 5028

Accessories





Linear Joint IP68
Ø26x95mm
■ 5671




T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673



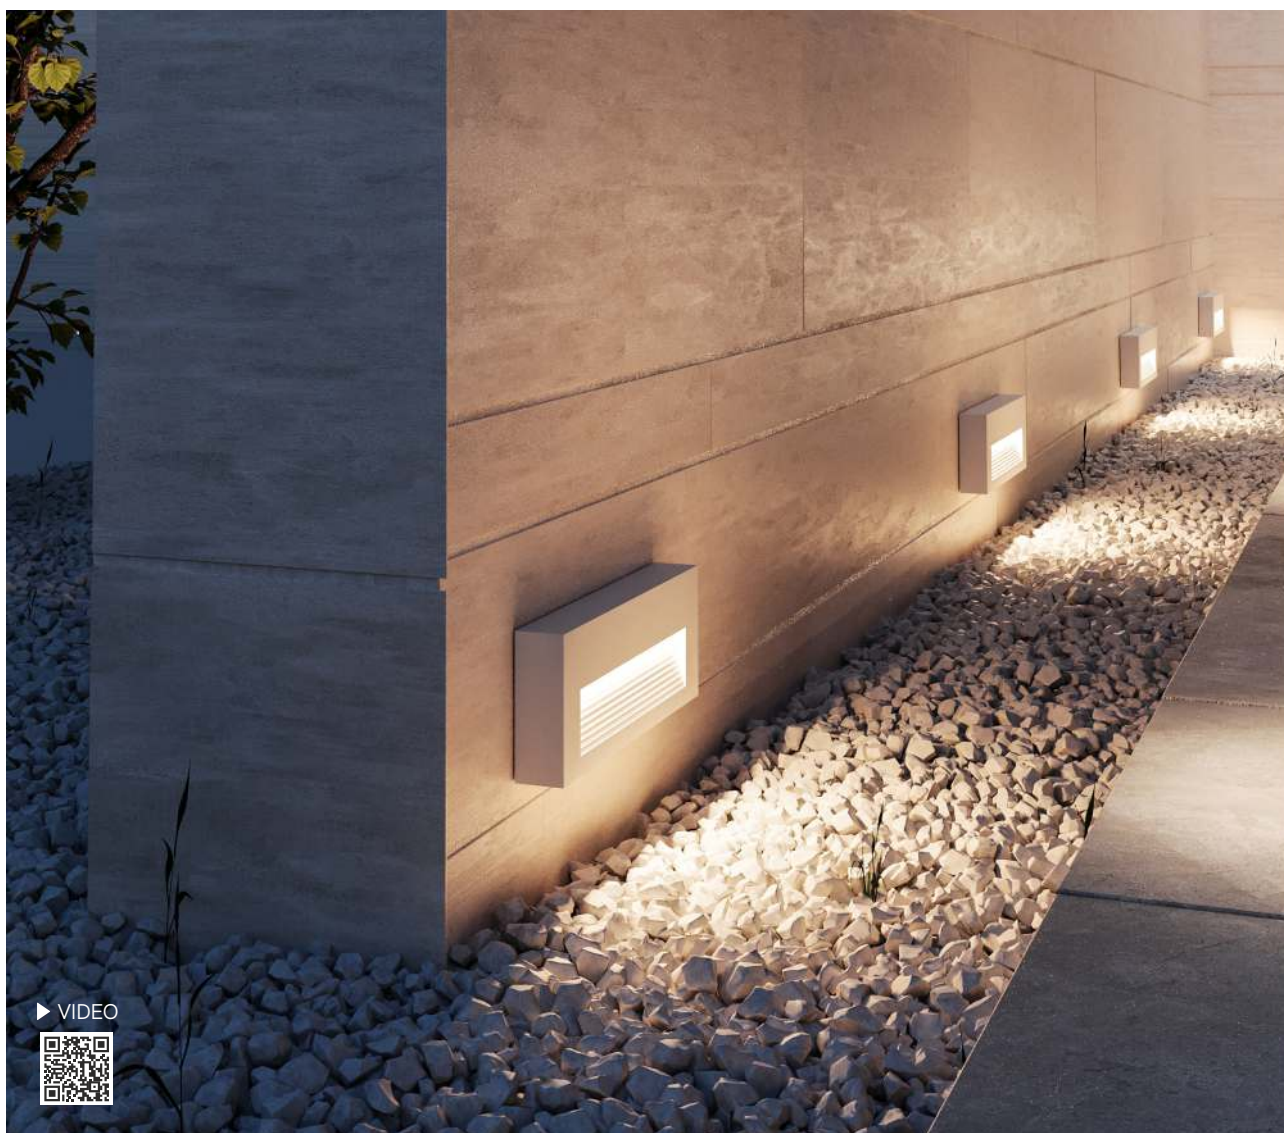

Tween recessed



Tween surface

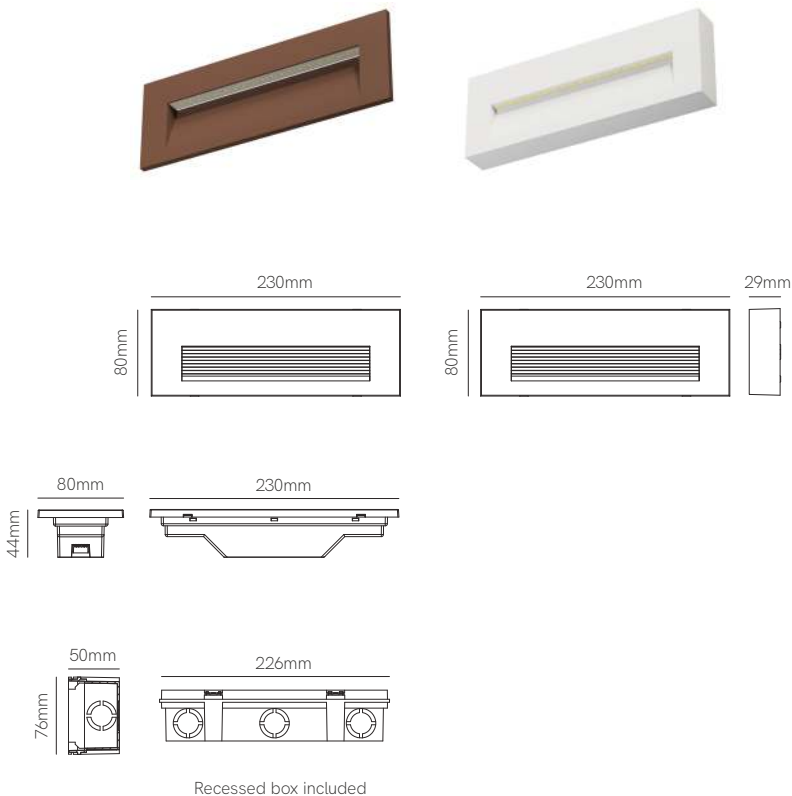

Technical Information

Power	5W	5W
Installation	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	360 lm	360 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	5199 5200 5201	5196 5197 5198

Accessories






Lek sensor



 Battery powered

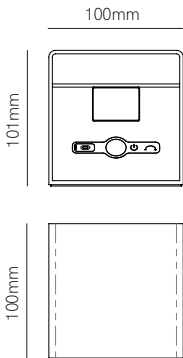

Technical Information

Power	6W
Installation	Surface
Color Temperature	3.000K
Lumens	358 lm
Material	Aluminium
Finishes	White / Black / Corten
Code	☐ 5666 ☒ 5667


☐

 RoHS 


3 YEARS WARRANTY BATTERY 1 YEAR | 30.000 HOURS | 5 HOURS | 4-24 HOURS | USB-C 5V | 4.400 mAh | OUTDOOR COVERED | IP 54 | CRI ≥80 | 100° | IK05 | DIMMABLE | +45°C | +10°C | PIR SENSOR | 1/9



Lek r wall



Lek sq wall



Technical Information

Power	6,8W	6,8W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm / 530 lm / 542 lm	480 lm / 530 lm / 542 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code	○	2.700K	4906	□	2.700K	4303
	○	3.000K	4907	□	3.000K	3983
	○	4.000K	4908	□	4.000K	3984
	●	2.700K	4909	■	2.700K	4304
	●	3.000K	4910	■	3.000K	3985
	●	4.000K	4911	■	4.000K	3986
	●	2.700K	4912	■	2.700K	4312
	●	3.000K	4913	■	3.000K	3987
	●	4.000K	4914	■	4.000K	3988
	🌈	Custom RAL		🌈	Custom RAL	

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



📄 Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

OUTDOOR COVERED

IP 54

220/240 VAC

PF >0,9

CRI ≥80

0°-120°

50/60 Hz

IK04

+40°C
-10°C

AKZO NOBEL



1/12



▶ VIDEO



Sphere wall



Technical Information

Power	9W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	465 lm
Material	Aluminium and glass
Finishes	White / Black
Code	○ 2.700K 5333
	○ 3.000K 5334
	● 2.700K 5336
	● 3.000K 5337



3 YEARS WARRANTY

30.000 HOURS

OUTDOOR COVERED

IP 54

220/240 VAC

PF >0,6

UGR <19

CRI ≥90

360°

50/60 Hz

+40°C
-20°C



1/12



▶ VIDEO



Oma

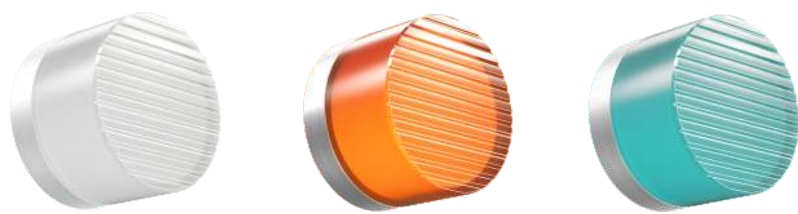


Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.000K / 2.800K / 4.000K
Lumens	○ 600lm / ● 440lm / ● 400lm
Material	Aluminium and methacrylate
Finishes	White / Amber / Turquoise
Code	○ 5381 ● 5382 ● 5383


Accessories

 Linear Joint IP68 Ø26x95mm ■ 5671	 T Joint IP68 74x118mm ■ 5672	 X Joint IP68 122x122mm ■ 5673
--	---	--



3 YEARS WARRANTY

30.000 HOURS



IP 65

220/240 VAC

PF >0,8

CRI ≥70-80



110°

50/60 Hz



IK06



+50°C
-20°C



CCT SWITCH





1/20



Clos wall



Clos wall dual



Technical Information

Power	8W	16W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.000 lm	2.100 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	○ 4876 ● 4877 ● 4878	○ 4879 ● 4880 ● 4881
------	----------------------------	----------------------------



Accessories (page 695)



Clos base mini
○ 4882
● 4883
● 4884





Clos dual base mini
○ 4888
● 4889
● 4890



Clos base
○ 4885
● 4886
● 4887



Clos dual base
○ 4891
● 4892
● 4893







New

Neo




Neo XL



Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5560 ☒ 5561	☐ 5564 ☒ 5565
	OUTDOOR COVERED IP 54 1/12	IP 65 1/4



3 YEARS WARRANTY

25.000 HOURS

100/240 VAC

PF >0,8

CRI ≥80

120°

50/60 Hz

IK08

+45°C

-25°C

CCT SWITCH

POWER 70%-100%



OUTDOOR



New

Neo sensor

Neo XL sensor



Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5562 ☒ 5563	☐ 5566 ☒ 5567

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | → | 100/240 VAC | CRI ≥80 | PF >0,8 | | 120° | 50/60 Hz | | +45°C / -25°C | PIR SENSOR | ON OFF | 8 sec / 8 min | STANDBY 0%-10% | CCT SWITCH

OUTDOOR COVERED


OUTDOOR




Mini Mac wall



Mac wall



Mac wall XL



*Included 33mm base, optional 53mm base.



Technical Information

Power	6W	15W	20W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	1.500 lm	2.000 lm
Material	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)
Finishes	White / Black / Wood / Corten	White / Black / Wood / Corten	White / Black / Wood / Corten
Code	○ 4995 ● 4996 ● 4997 ● 5218 ① Custom RAL	○ 4998 ● 4999 ● 5000 ● 5219 ① Custom RAL	○ 5001 ● 5002 ● 5003 ● 5220 ① Custom RAL

① Consult delivery terms and conditions.

Accessories

53mm

Mini mac base

○ 5226

● 5227

● 5228

● 5229

53mm

Mac base

○ 5230

● 5231

● 5232

● 5233

53mm



Mac XL base

○ 5234

● 5235

● 5236

● 5237



3 YEARS WARRANTY

25.000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

360°

50/60 Hz

IK06

TRIAC DIMM

+40°C


-20°C

CCT SWITCH

1/10



Mac wall base



Technical Information

Power	12W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.020 lm
Material	Aluminium and Polycarbonate
Finishes	White / Black / Corten

Code	○ 5264
	● 5265
	● 5266

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



3 YEARS WARRANTY

30.000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

110°

50/60 Hz

IK06



+50°C
-20°C

CCT SWITCH



Mini Comet

Comet



Technical Information

Power	Switch 10W / 20W	Switch 20W / 40W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	10W: 1.250 lm / 20W 2.400 lm	20W: 2.500 lm / 40W: 5.000 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	5075 5076 5113	5073 5074 5112

1/16

1/6

Accessories

Linear Joint IP68
Ø26x95mm


5671

T Joint IP68
74x118mm

5672

X Joint IP68
122x122mm

5673



3 YEARS WARRANTY

30.000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

40°x90°

50/60 Hz

IK10

+45°C
-25°C

AKZO NOBEL

CCT SWITCH



POWER SWITCH

TRIAC DIMM



Zibor

Selen



Technical Information

Power	12W	12W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	1.200 lm / 1.250 lm	1.200 lm / 1.250 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	○ 3.000K 4670 ○ 4.000K 4669 ● 3.000K 4830 ● 4.000K 4829 ①  Custom RAL	○ 3.000K 4668 ○ 4.000K 4667 ● 3.000K 4828 ● 4.000K 4827 ①  Custom RAL

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671




T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673




① Consult delivery terms and conditions.








Blis r



Blis sq



Blis rect



Technical Information

Power	15W	15W	24W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.470 lm	1.370 lm	2.360 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	○ 4957	□ 4960	□ 4982
	● 4958	■ 4961	■ 4983
	● 4959	■ 4962	■ 4984
PF >0,6 250° 			
PF >0,6 180° 			
PF >0,9 180° 			

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673




*IP65 connection box included.




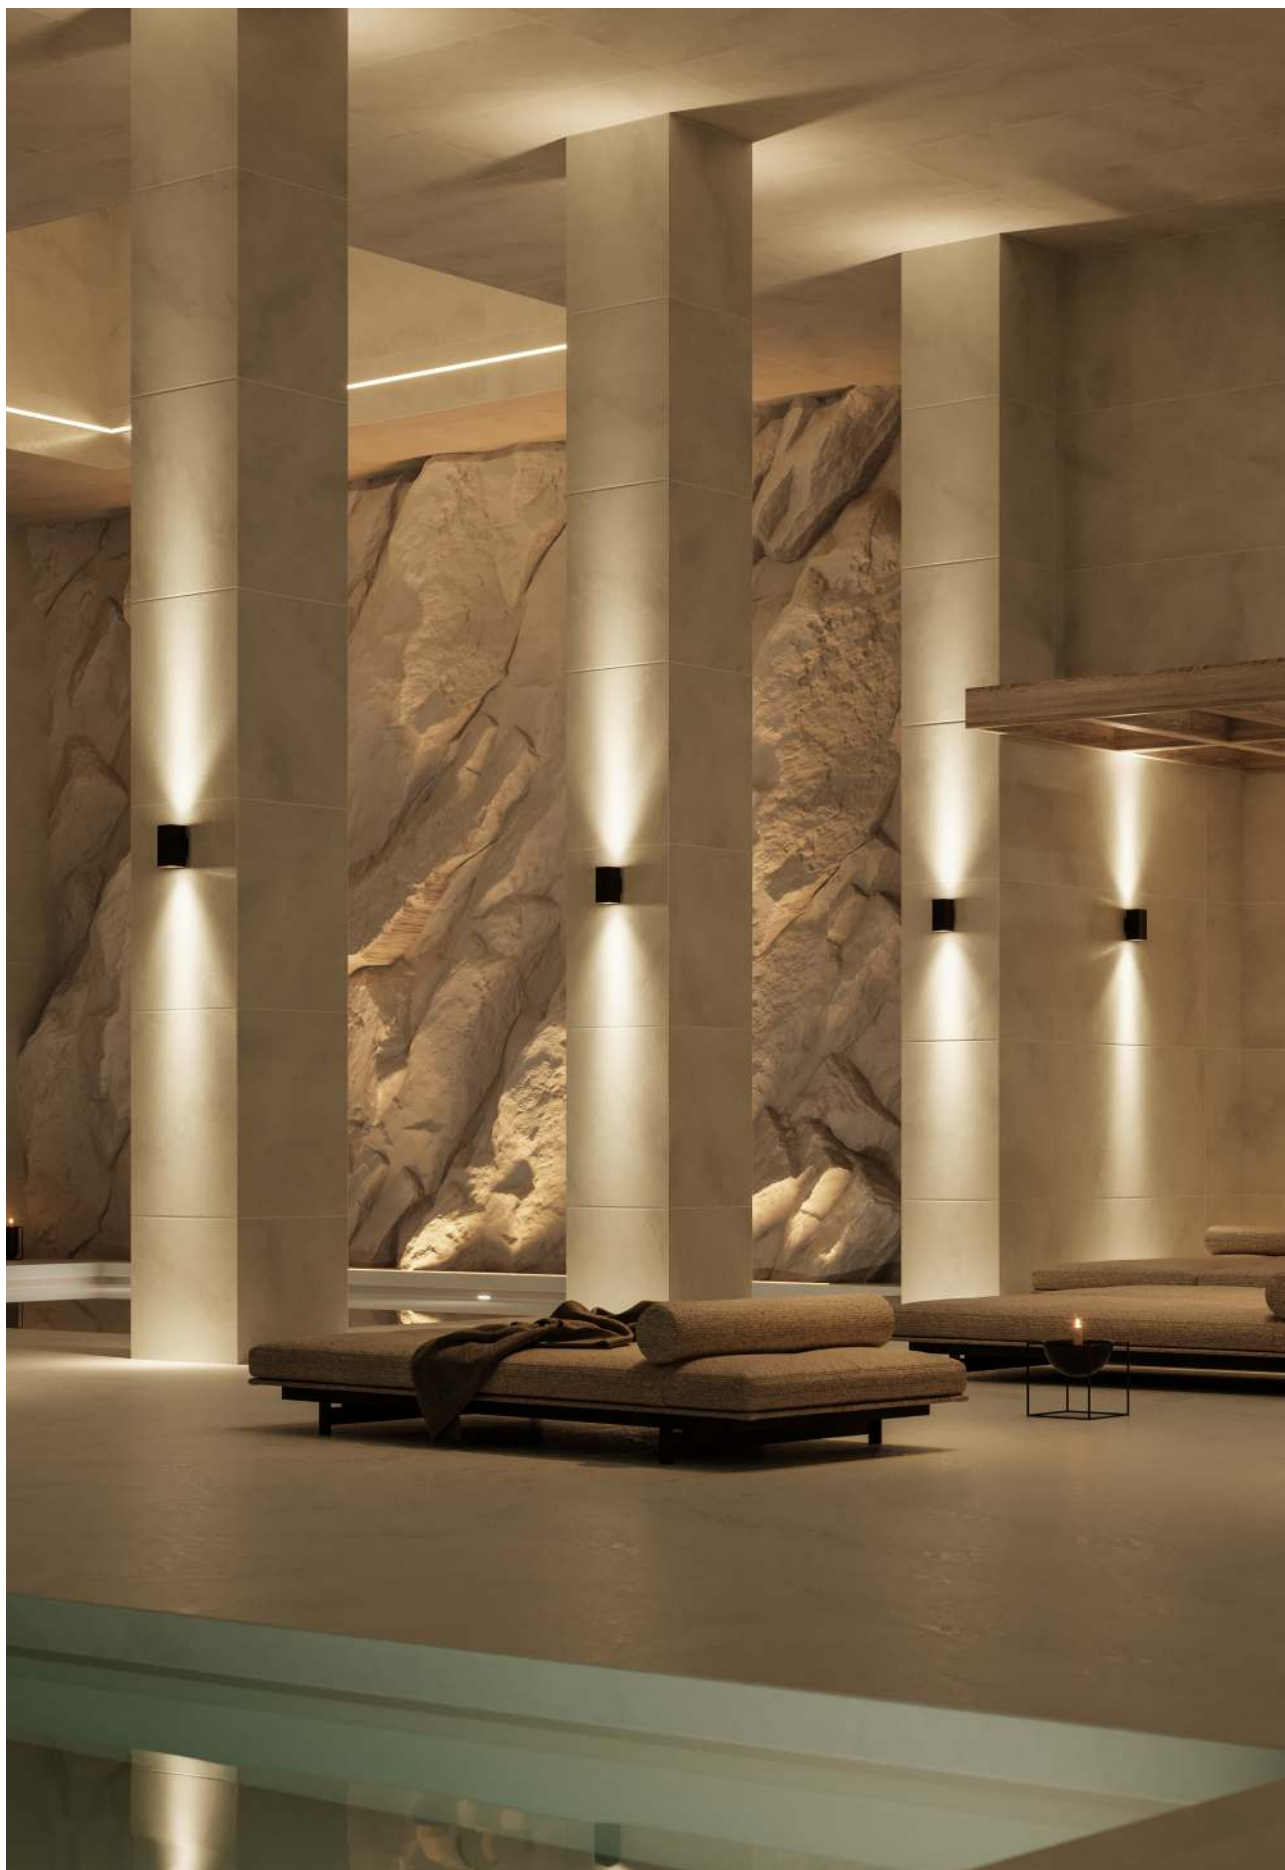

Sunset r



Sunset sq



Technical Information

Power	16W	16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.800 lm	1.800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	○ 4989 ● 4990 ● 4991 🌈 Custom RAL	□ 4992 ■ 4993 ■ 4994 🌈 Custom RAL

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

40°

50/60 Hz

IK06

+40°C
-20°C



CCT SWITCH

1/10



Sunset XL

Sunset XL dual



Technical Information

Power	16W	2X16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.300K / 4.000K	Switch 2.700K / 3.300K / 4.000K
Lumens	1.450 lm	2.900 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	○ 5419 ● 5420 ● 5421 🎨 Custom RAL	○ 5422 ● 5423 ● 5424 🎨 Custom RAL
	1/20	1/15

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673







Mini Pla

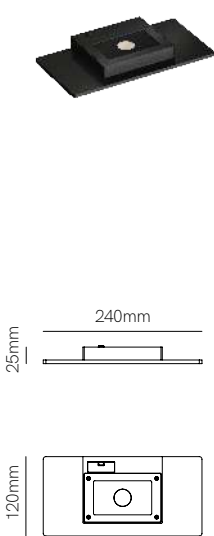

Pla

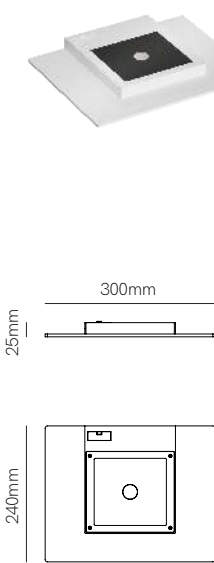

Pla XL

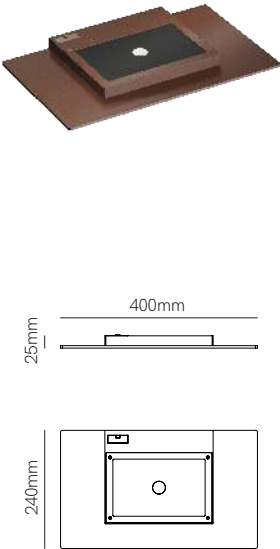



Technical Information

Power	20W	35W	35W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	900 lm	1.400 lm	1.400 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	5684	5687	5690
	5685	5688	5691
	5686	5689	5692
	Custom RAL	Custom RAL	Custom RAL

1/10


1/6

Accessories




Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <19 | PF >0,9 | CRI >90 | 110° | 50/60 Hz | +50°C / -20°C | CCT SWITCH

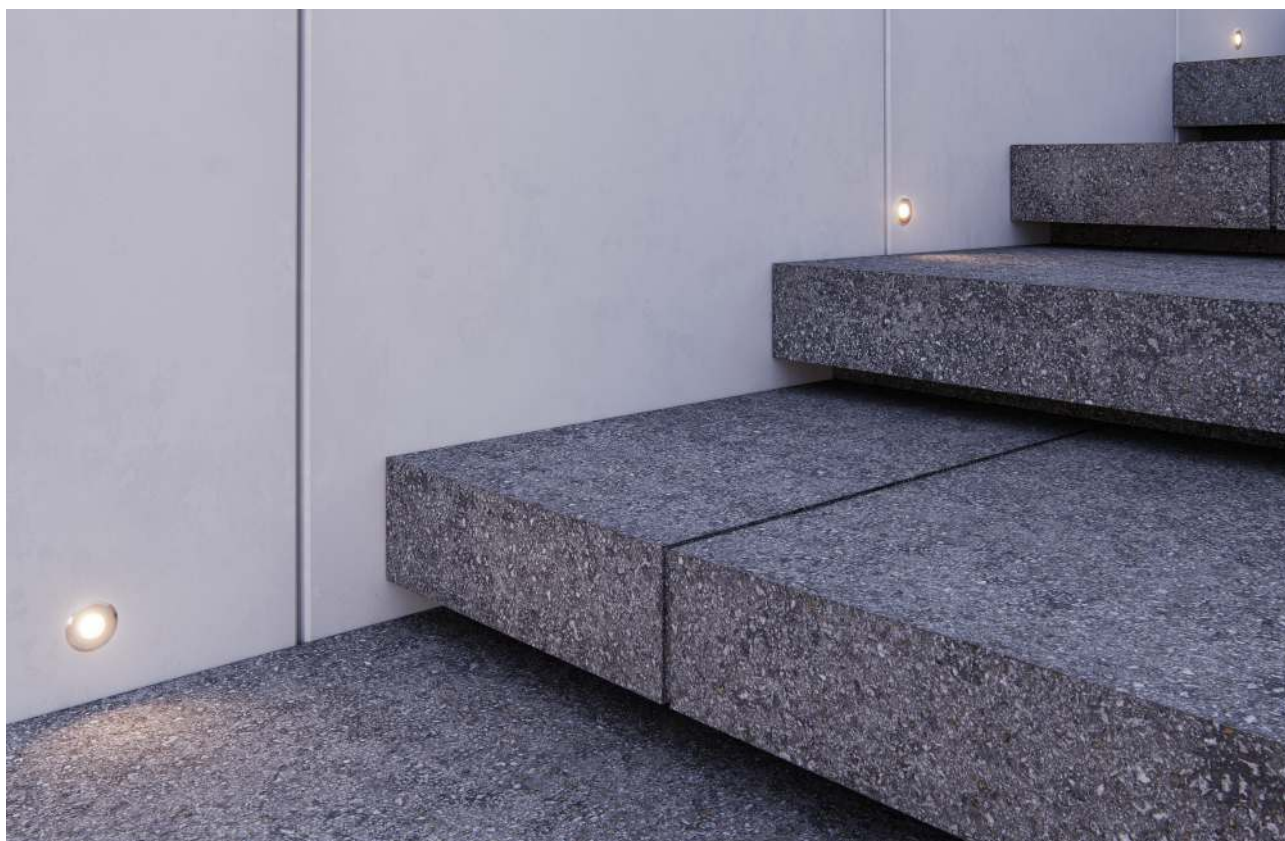

Optic



Technical Information

Power	2W
Installation	Recessed
Color Temperature	3.000K
Lumens	55 lm
Material	Inox 304
Finishes	Brushed silver
Code	● 4331

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Recessed box included. Integrated driver.





Nano Sigma







Mini Sigma



Sigma



Sigma XL



Technical Information

Power	3W	9W	12W	17W
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K	3.000K
Lumens	210 lm	450 lm	650 lm	1.440 lm
Material	Stainless steel + alumin.	Stainless steel + alumin.	Stainless steel + alumin.	Stainless steel + alumin.
Finishes	Brushed silver	Brushed silver	Brushed silver	Brushed silver

Code	● 3.000K 4251	● 3.000K 5576	● 3.000K 5577	● 3.000K 4135
	PF >0,6 1/30	PF >0,5 1/12	PF >0,9 1/8	PF >0,9 1/8

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673




*Integrated driver. Drainage (min. 300mm).



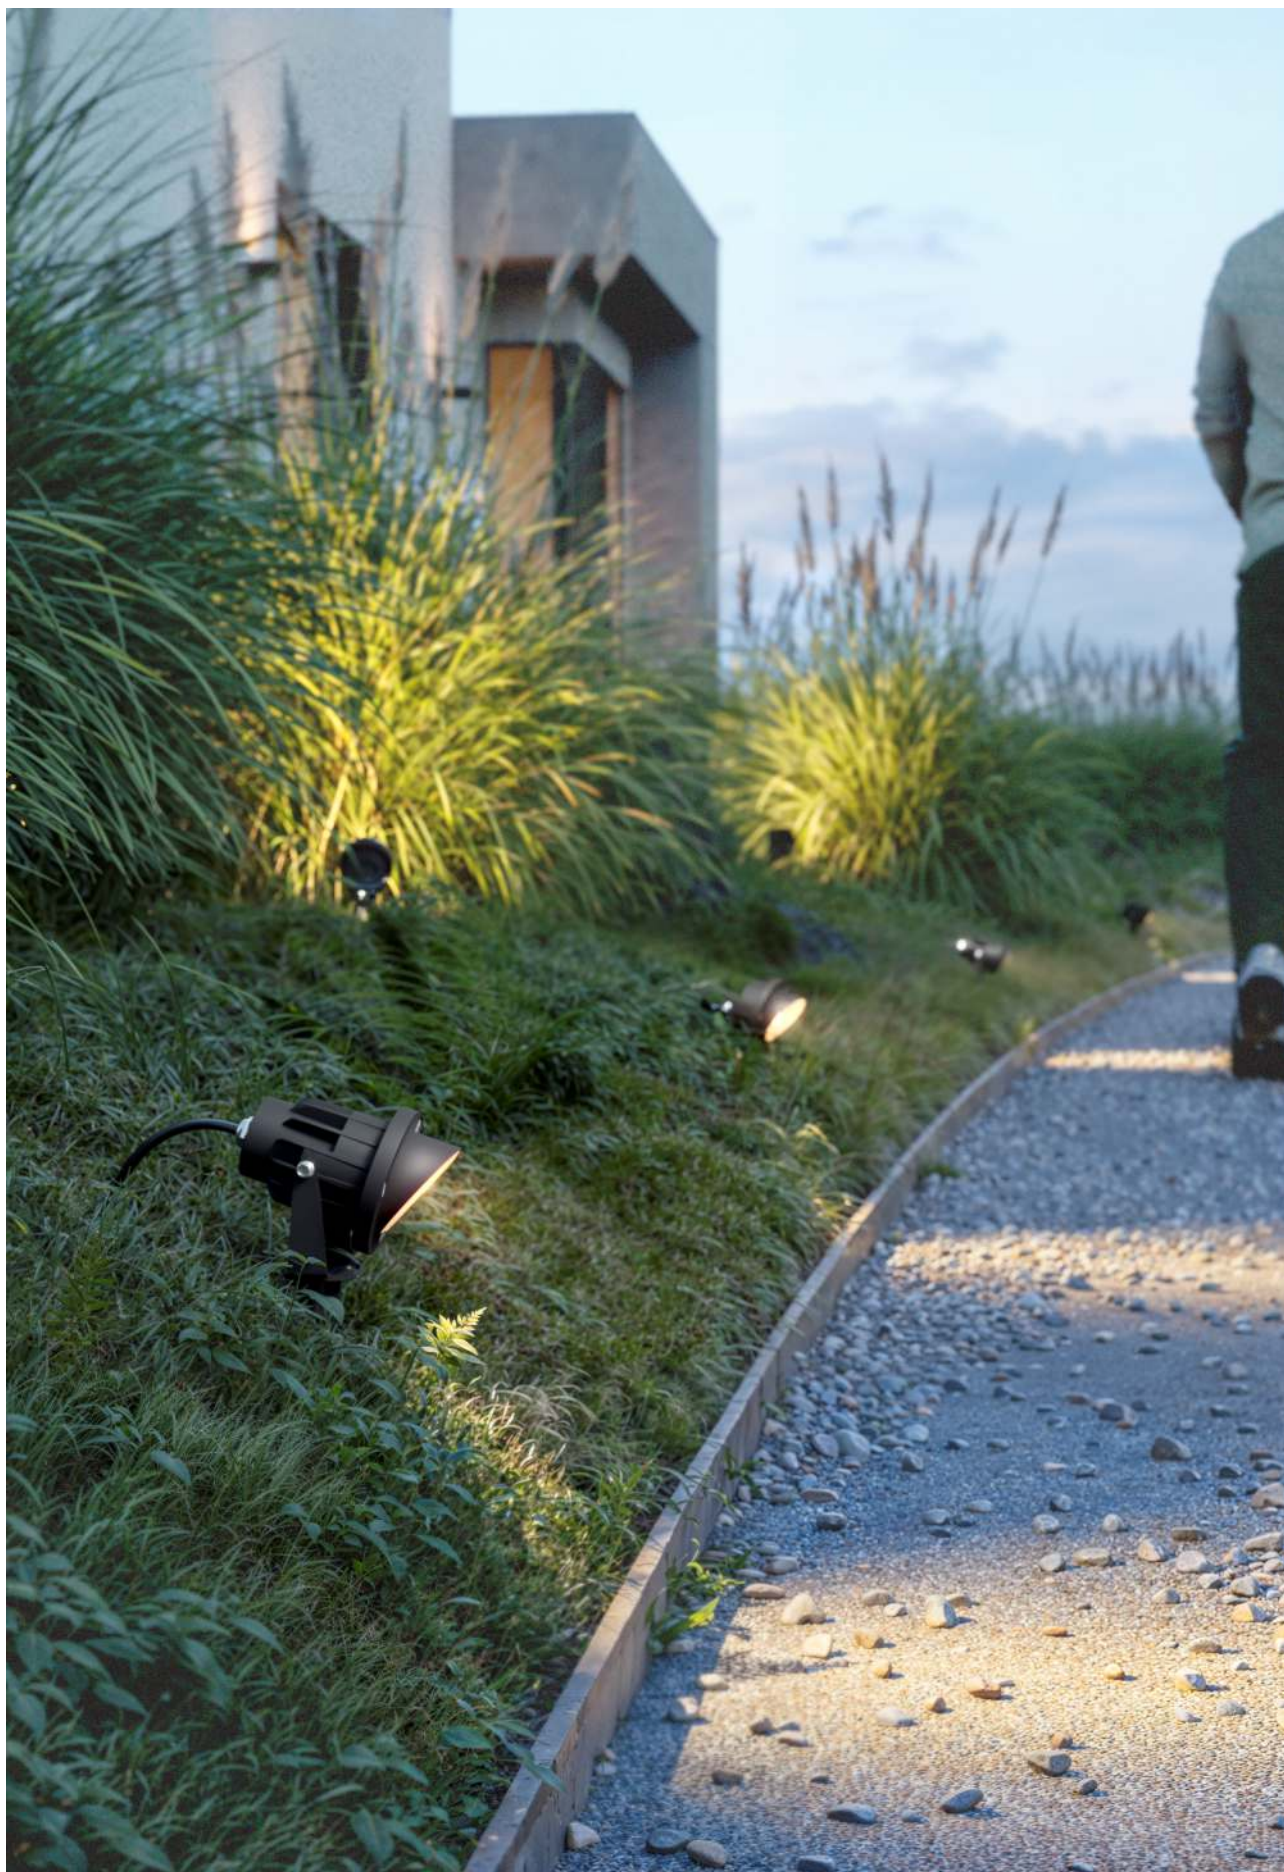

Caddie

Fade

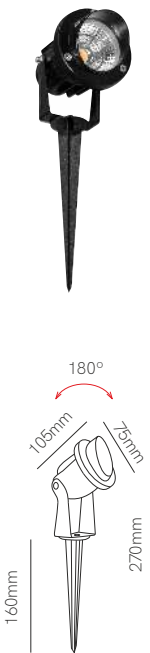

Technical Information

Power	3W	5W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	2.200K / 3.000K
Lumens	200 lm / 270 lm	350 lm / 450 lm
Material	Aluminium	Aluminium
Finishes	Black / Corten	Black / Corten
Code	● 2.200K 5678 ● 3.000K 3581 ● 2.200K 5679 ● 3.000K 4923 CRI ≥80 ● 2.200K 5680 ● 3.000K 3580 ● 2.200K 5681 ● 3.000K 4924 CRI ≥90	

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Spike included.

3 YEARS WARRANTY

35.000 HOURS

IP 65

100/277 VAC

PF >0,6

CABLE 24CM

45°

50/60 Hz


IK05

+40°C -20°C


1/50



Zas r



Zas sq



Technical Information

Power	3W	7W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	3.000K / GREEN
Lumens	200 lm / 240 lm	450 lm / 380
Material	Aluminium	Aluminium
Finishes	Black / Corten	White / Black / Corten
Code	● 2.200K 5682 ● 3.000K 4134 ● 2.200K 5683 ● 3.000K 4922	□ 3.000K 4690 ■ 3.000K 4692 ■ GREEN 5694 ■ 3.000K 4693 ■ GREEN 5693

100/277 VAC | 20.000 HOURS | PF >0,6 | 30° | IK05

220/240 VAC | 30.000 HOURS | PF >0,9 | 40° | IK08

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Spike included.

3 YEARS WARRANTY


IP 65

CRI ≥80

CABLE 24CM

50/60 Hz


1/50

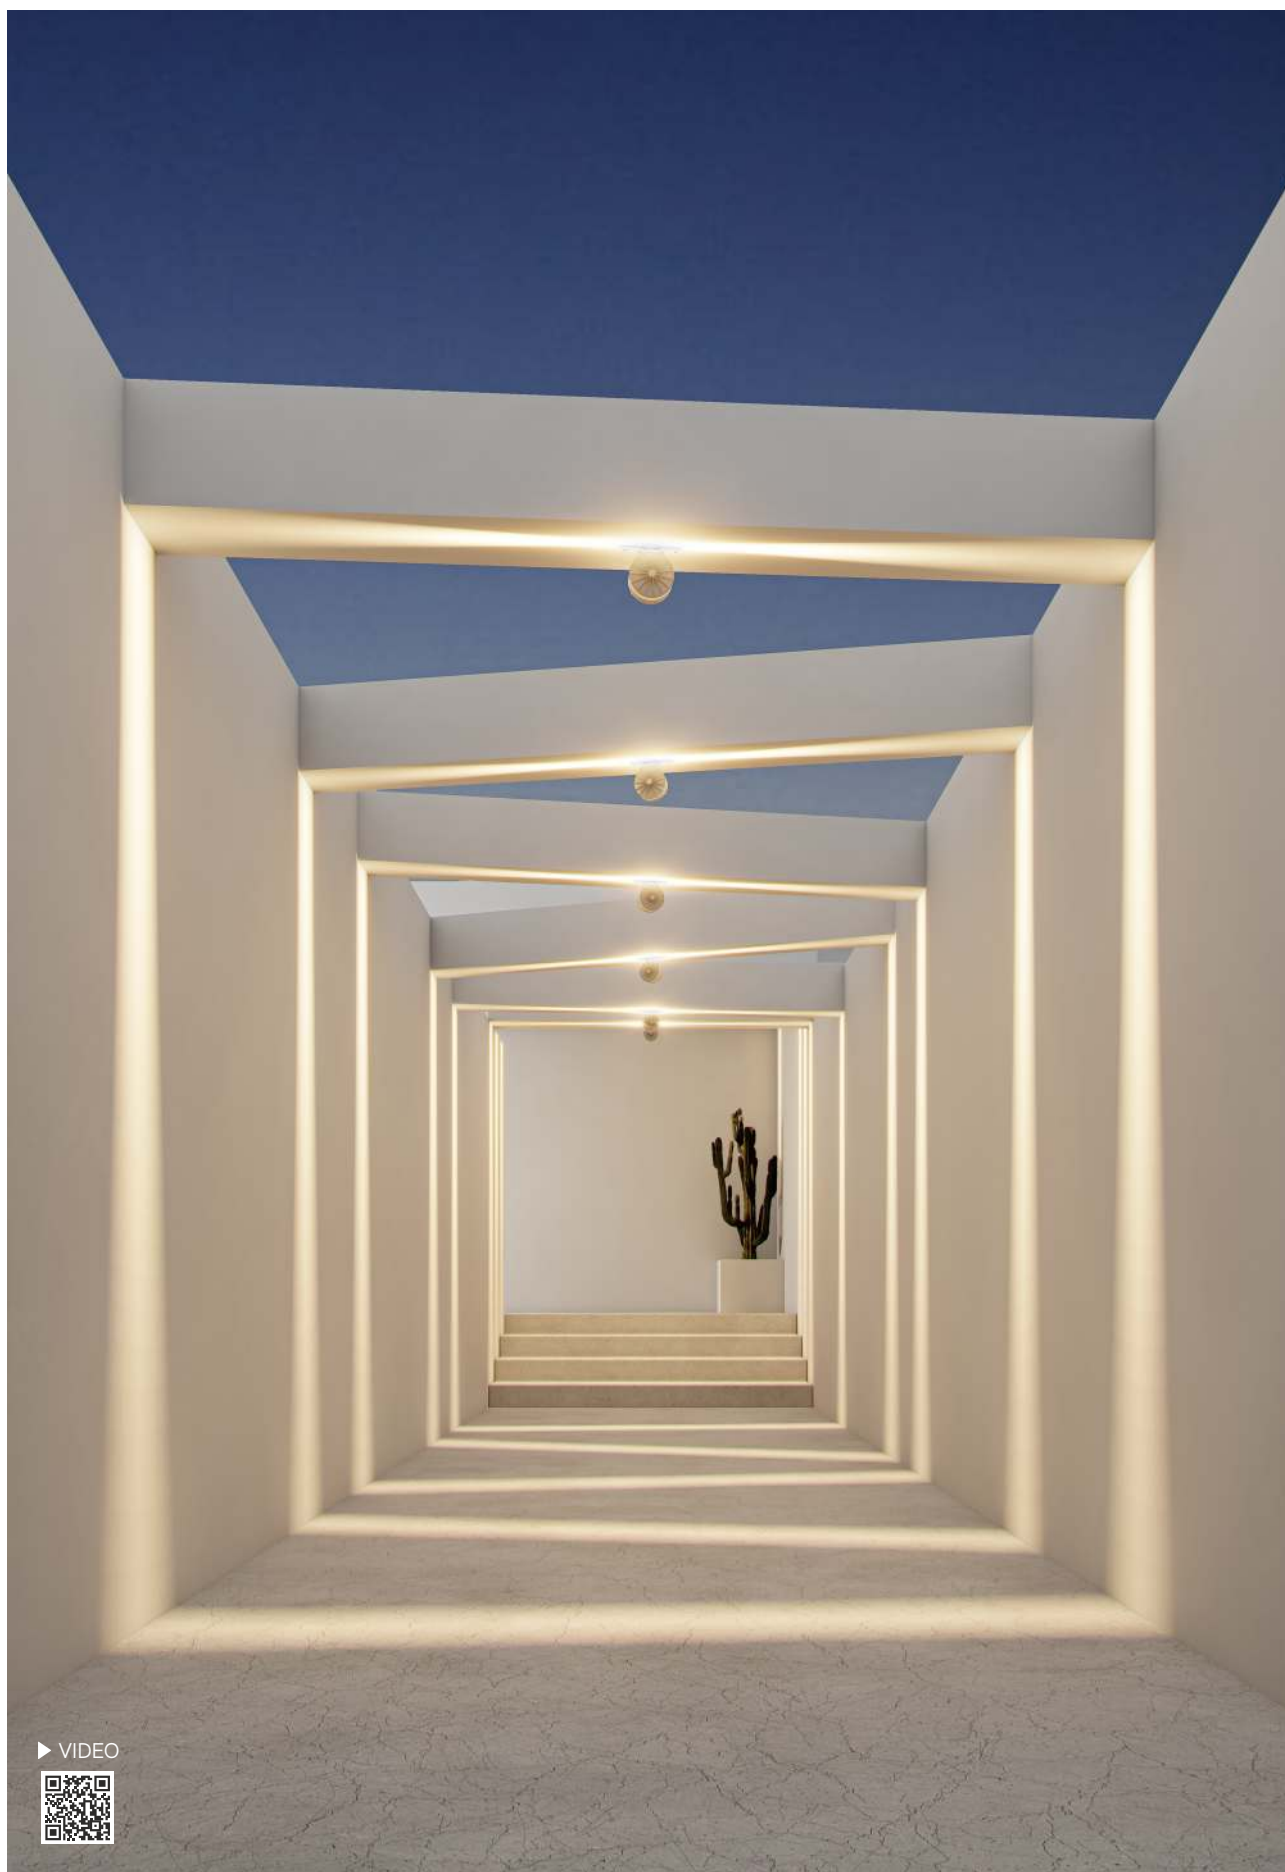

► VIDEO



Nik



Technical Information

Power	5W
Installation	Surface
Color Temperature	3.000K / 4.000K
Lumens	340 lm / 350 lm
Material	Aluminium
Finishes	Gray
Code	3.000K4291 4.000K4292

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Integrated driver.

3 YEARS WARRANTY

20.000 HOURS

IP 65

100/277 VAC

PF >0,6

CRI ≥70

5°

50/60 Hz


IK05

+40°C
-20°C

1/40



Signal

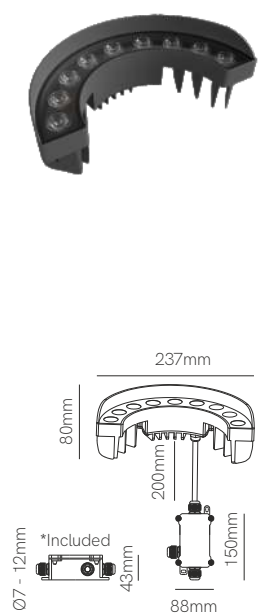

Technical Information

Power	9W
Installation	Floor / Tree trunk
Color Temperature	3.000K
Lumens	720 lm
Material	Aluminium
Finishes	Dark gray
Code	● 3.000K 4290

CE RoHS  

*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY

20.000 HOURS

 → 

IP 65

100/277 VAC

PF >0,6

CRI ≥80



CABLE 20CM

30° 

50/60 Hz


 IK05

 +40°C -20°C






Sair



Sair XL



Technical Information

Power	10W	20W																														
Installation	Floor	Floor																														
Color Temperature	2.200K / 3.000K	2.200K / 3.000K																														
Lumens	450 lm / 900 lm	1.000 lm / 1.500 lm																														
Material	Aluminium	Aluminium																														
Finishes	White / Black / Corten	White / Black / Corten																														
Code	<table><tr><td>○</td><td>3.000K</td><td>4894</td></tr><tr><td>●</td><td>2.200K</td><td>5674</td></tr><tr><td>●</td><td>3.000K</td><td>4895</td></tr><tr><td>●</td><td>2.200K</td><td>5675</td></tr><tr><td>●</td><td>3.000K</td><td>4896</td></tr></table>	○	3.000K	4894	●	2.200K	5674	●	3.000K	4895	●	2.200K	5675	●	3.000K	4896	<table><tr><td>○</td><td>3.000K</td><td>4897</td></tr><tr><td>●</td><td>2.200K</td><td>5676</td></tr><tr><td>●</td><td>3.000K</td><td>4898</td></tr><tr><td>●</td><td>2.200K</td><td>5677</td></tr><tr><td>●</td><td>3.000K</td><td>4899</td></tr></table>	○	3.000K	4897	●	2.200K	5676	●	3.000K	4898	●	2.200K	5677	●	3.000K	4899
○	3.000K	4894																														
●	2.200K	5674																														
●	3.000K	4895																														
●	2.200K	5675																														
●	3.000K	4896																														
○	3.000K	4897																														
●	2.200K	5676																														
●	3.000K	4898																														
●	2.200K	5677																														
●	3.000K	4899																														

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Spike included.

3 YEARS WARRANTY

20.000 HOURS

IP 65

100/265 VAC

PF >0,9

CRI ≥90

CABLE 24CM

18°

50/60 Hz


IK05

+40°C -20°C

1/20



Fix



Technical Information

Installation	Floor
Material	Polypropylene
Finishes	Black
Lamp Holder	E27
Code	● 4820

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Spike included. Recomend lamp Par 38 (page 697).

3 YEARS
WARRANTY

| IP
65

|


| 50/60
Hz

|

| 1/6



Wech

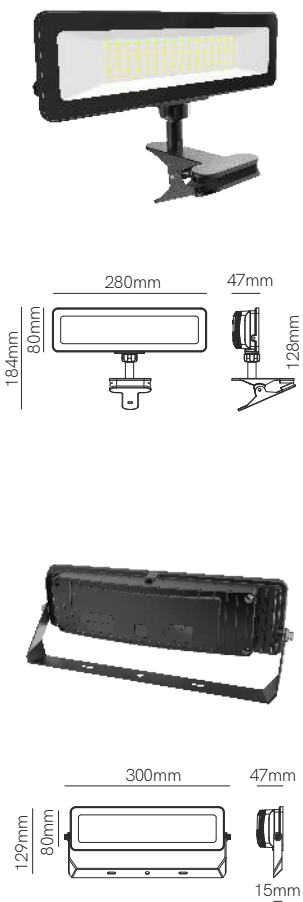


Technical Information

Power	10W
Installation	Portable
Color Temperature	Switch 3.000K / 4.000K / 5.000K
Lumens	600 lm
Material	Aluminium & Polycarbonate
Finishes	White / Black
Code	☐ 5004 ☒ 5005




Clamp, lyre and charger included.





Sky 10W spike

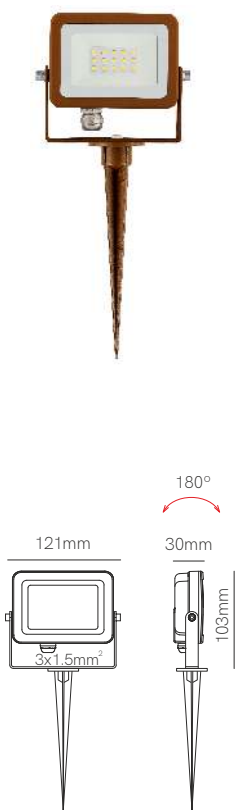

Technical Information

Power	10W
Installation	Floor
Color Temperature	3.000K/ GREEN
Lumens	1.000 lm / 820 lm
Material	Aluminium
Finishes	Corten
Code	3.000K4340 GREEN4341

Accessories



Linear Joint IP68
Ø26x95mm

5671




T Joint IP68
74x118mm

5672



X Joint IP68
122x122mm

5673



*Spike included.

5 YEARS WARRANTY

50.000 HOURS





IP 65

220/240 VAC

PF >0,9

CRI ≥80



115°



50/60 Hz





+45°C
-20°C

AKZO NOBEL

>1KV



1/32

Sky 10W switch

Sky 20W switch



► VIDEO



Technical Information

Power	10W	20W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.200 lm	2.400 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Gray
Code	☐ 4679 ☒ 4680 ☐ 4681	☐ 4682 ☐ 4684

1/32

1/24

Accessories



Optional spike
175mm
■ 4027-N




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



3 YEARS WARRANTY

25.000 HOURS

 → 

IP 65

180/260 VAC

PF >0,9

CRI ≥80



115°



50/60 Hz





+45°C
-20°C

AKZO NOBEL



CCT SWITCH

>1KV 

Sky 30W switch

Sky 40W switch



► VIDEO



Technical Information

Power	30W	40W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	3.600 lm	4.800 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black
Code	☐ 4685 ☒ 4686 ☐ 4687	☐ 4688 ☒ 4689



Accessories



Optional spike
175mm
■ 4027-N




Linear Joint IP68
Ø26x95mm
■ 5671




T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



3 YEARS WARRANTY | 25.000 HOURS | | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV

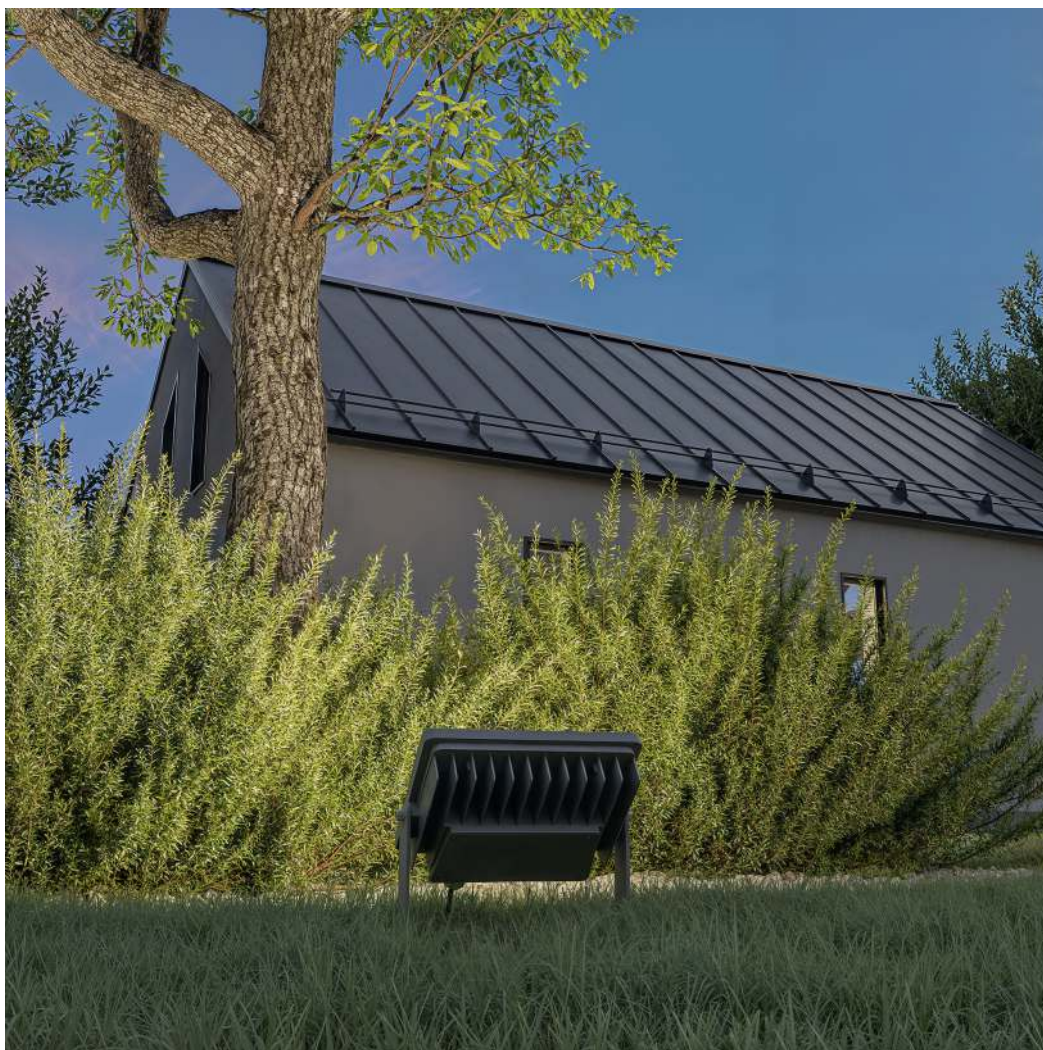




NEW

Sky 10W 4CCT

Sky 20W 4CCT

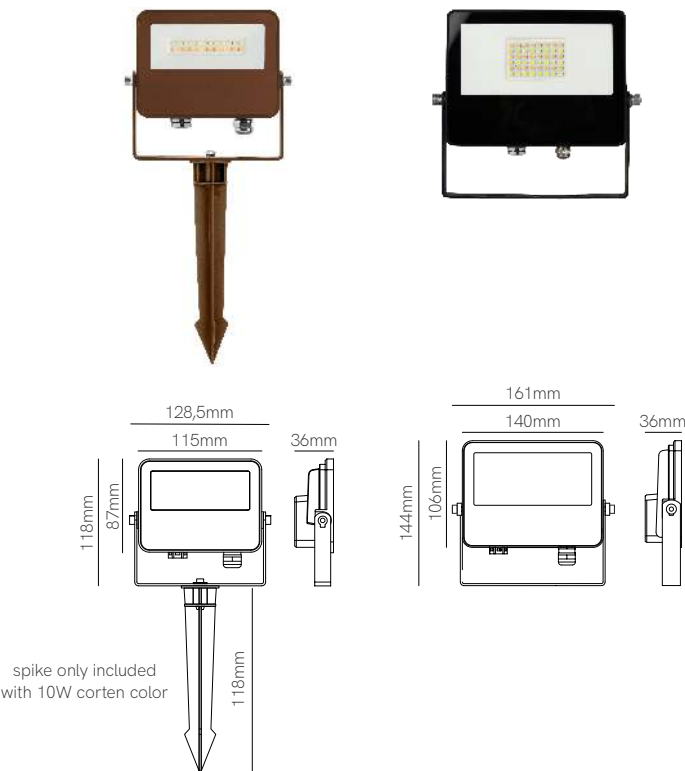

Technical Information

Power	10W	20W
Installation	Surface	Surface
Color Temperature (Switch)	2.700K/3.000K/4.000K/5.000K	2.700K/3.000K/4.000K/5.000K
Lumens	997 / 1.100 / 1.270 / 1.090 lm	2.080 / 2.180 / 2.480 / 2.080 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray / Corten	White / Black / Gray / Corten
Code	4679-N 4680-N 4681-N 5729	4682-N 4683-N 4684-N 5730

1/32

1/24

Accessories



Optional spike
175mm
■ 4027-N




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673




5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | 4CCT SWITCH | >1KV

NEW

Sky 30W 4CCT



Sky 40W 4CCT



Technical Information

Power	30W	40W
Installation	Surface	Surface
Color Temperature (Switch)	2.700K / 3.000K / 4.000K / 5.000K	2.700K / 3.000K / 4.000K / 5.000K
Lumens	3.270 / 3.390 / 3.900 / 3.420 lm	4.000 / 4.840 / 4.880 / 4.080 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray / Corten	White / Black / Gray / Corten

Code	 4685-N	 4688-N
	 4686-N	 4689-N
	 4687-N	 4694-N
	 5731	 5732

1/24

1/12

Accessories



Optional spike
175mm
■ 4027-N




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673




5 YEARS WARRANTY | 50.000 HOURS |  →  | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 |  | 110°  | 50/60 Hz |  IK08 |  +45°C / -20°C | AKZO NOBEL |  4CCT SWITCH | >1KV 




Sky 10W sensor



Sky 30W sensor



Sky 50W sensor



Technical Information

Power	10W	30W	50W
Installation	Surface	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K	4.000K / 5.000K
Lumens	1.150 lm / 1.200 lm	3.550 lm / 3.600 lm	5.950 lm / 6.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	☐ 4.000K 4349	☐ 4.000K 4352	☐ 4.000K 4354
	☐ 5.000K 4350	☐ 5.000K 4353	☐ 5.000K 4355
	☒ 4.000K 4308	☒ 4.000K 4309	☒ 4.000K 4311
	☒ 5.000K 4351	☒ 5.000K 4310	☒ 5.000K 4356

1/32

1/24

1/12

Accessories



Optional spike
175mm
■ 4027-N




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673




5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | MICROWAVE SENSOR | 5 sec / 5 min | 1m / 7m | ON / OFF | >1kV


Sky 10W



Sky 20W



Sky 30W



Technical Information

Power	10W	20W	30W
Installation	Surface	Surface	Surface
Color Temperature	5.000K	2.700K / 4.000K / 5.000K	2.700K / 4.000K
Lumens	1.150 lm	2.250 lm / 2.400 lm / 2.450 lm	3.450 lm / 3.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White	Black / Corten	Corten

Code	5.000K4254	5.000K4266 2.700K4401 4.000K4402	2.700K4279 4.000K4280
------	----------------------------------	--	---

1/36

1/32

1/24

Accessories



Optional spike
175mm
■ 4027-N




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672




X Joint IP68
122x122mm
■ 5673




5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 50/60 Hz | | +45°C -20°C | AKZO NOBEL | >1KV


Sky 100W



Sky 150W



Sky 200W



Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	2.200K	2.200K	2.200K
Lumens	7.000 lm	11.000 lm	14.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black
Code	■ 3955	■ 3956	■ 3957
	1/4	1/2	1/2

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



5 YEARS WARRANTY

50.000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

115°

50/60 Hz

IK08

+45°C
-20°C

AKZO NOBEL

>2kV




New

Polaris 100W

Polaris 150W



Polaris 200W

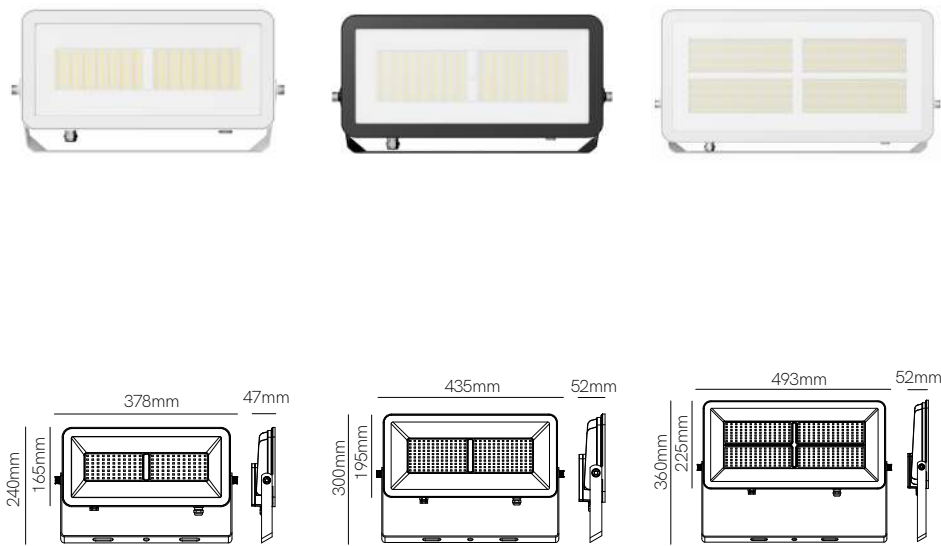


Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	12.700 lm / 13.000 lm / 13.200 lm	19.200 lm / 19.500 lm / 19.700 lm	25.700 lm / 26.000 lm / 26.200 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	5702 5698	5703 5699	5704 5700
	1/4	1/3	1/3



Accessories



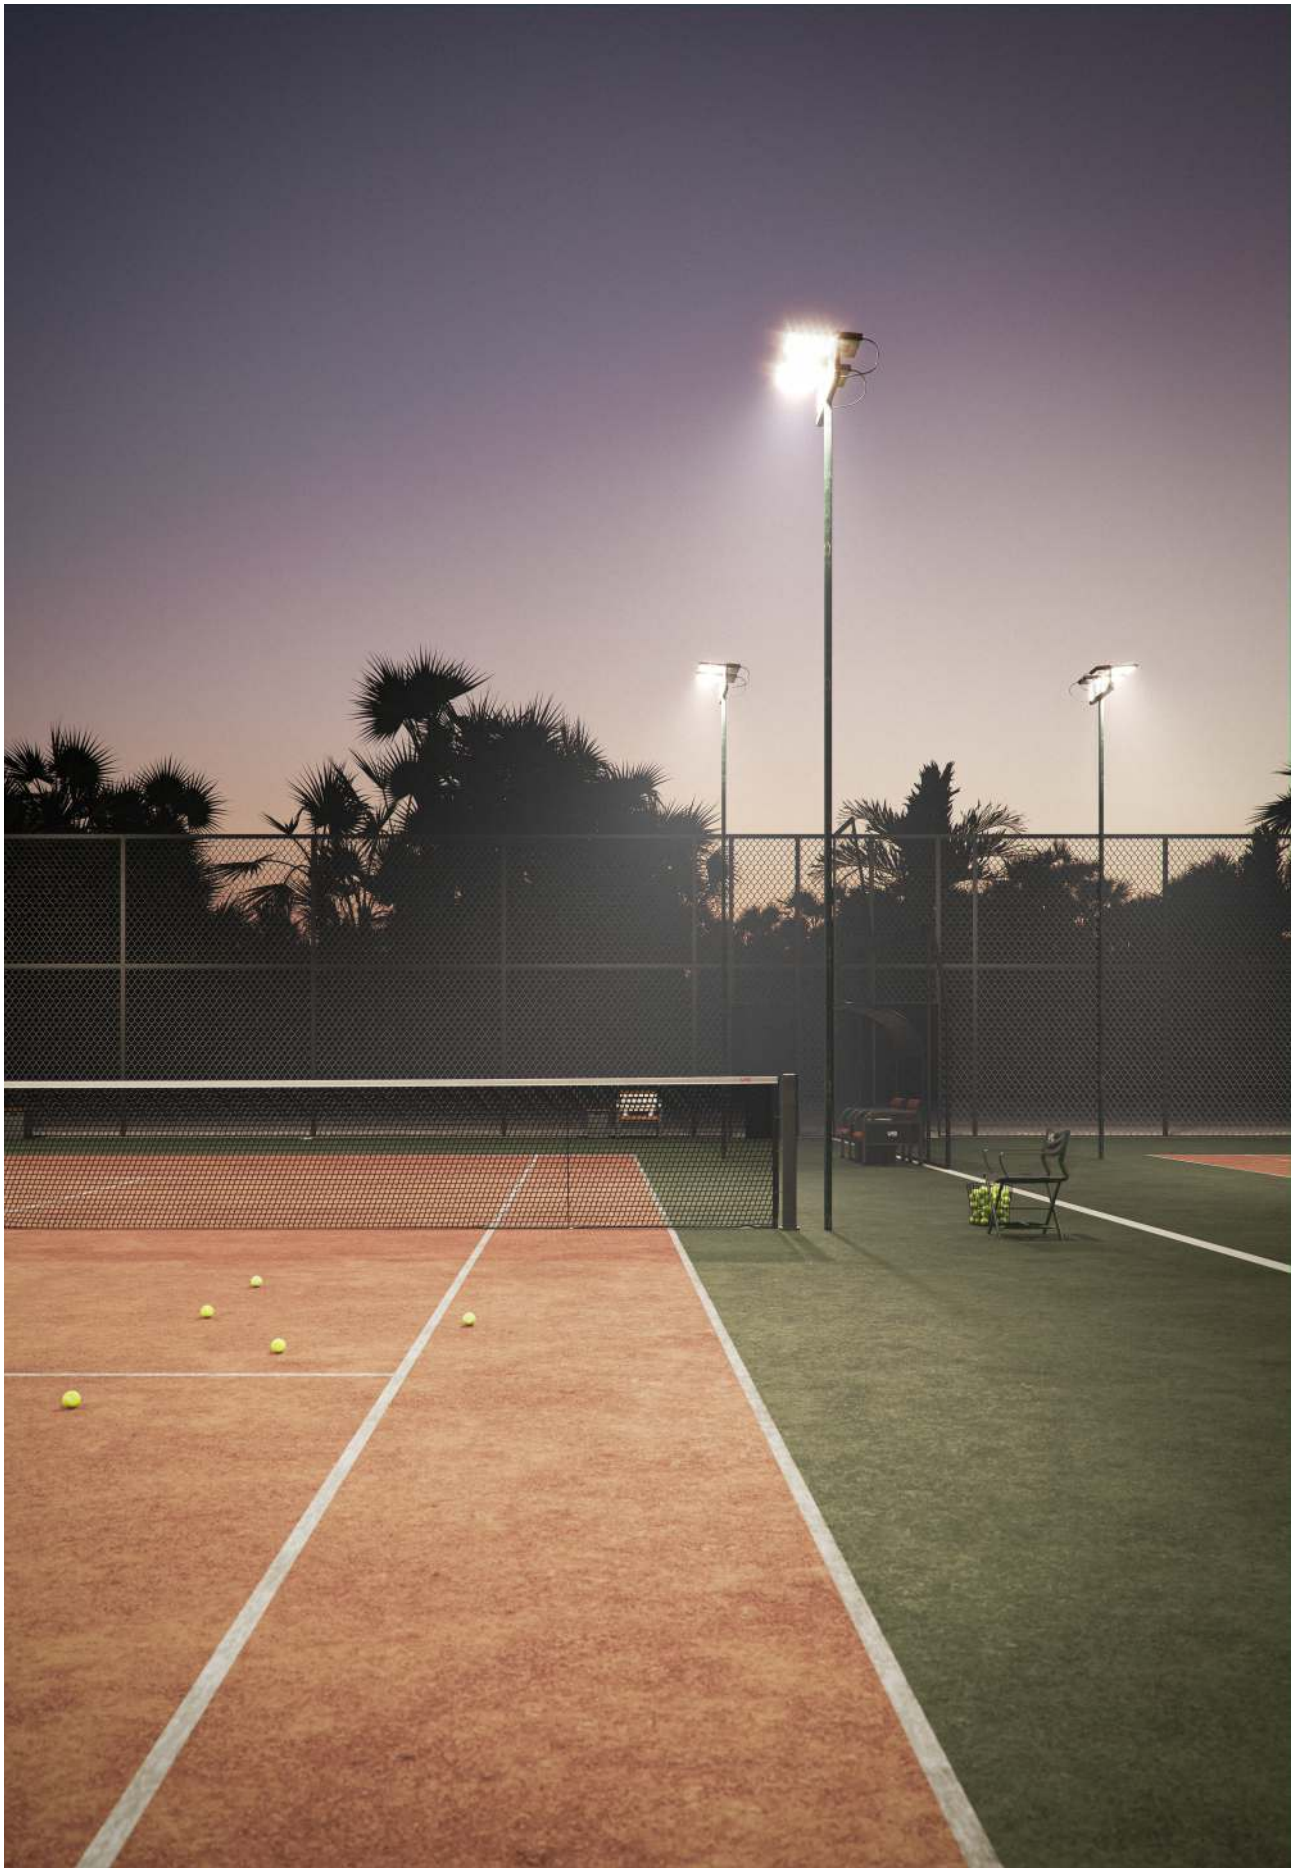

Krion 300W

Krion 400W



5m	10m	15m	20m
380 lx	100 lx	45 lx	25 lx

5m	10m	15m	20m
470 lx	120 lx	55 lx	30 lx



Technical Information

Power	300W	400W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K
Lumens	39.000 lm / 39.300 lm	52.000 lm / 52.300 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	■ 4.000K 4509 ■ 5.000K 4511	■ 4.000K 4510 ■ 5.000K 4512

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



5 YEARS WARRANTY

50.000 HOURS

IP 65

100/277 VAC

PF >0,9

CRI ≥80

80°x140°

50/60 Hz

IK10

+45°C
-25°C

AKZO NOBEL


>6KV

1




Clos base mini






Clos dual base mini






Clos base





Clos dual base







Technical Information

Installation	Floor	Floor	Floor	Floor
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	 4882	 4888	 4885	 4891
	 4883	 4889	 4886	 4892
	 4884	 4890	 4887	 4893
	 	 	 	 

Accessories (page 639).



Clos wall

-  4876
-  4877
-  4878



Clos wall dual


-  4879
-  4880
-  4881






New

Cam



Cam XL



Technical Information

Power	9W	9W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5568 ☒ 5569	☐ 5570 ☒ 5571

1/4

1/2

1/4



3 YEARS
WARRANTY

25.000
HOURS

 → 

IP 54

100/240
VAC

PF >0,8

CRI ≥80



120° 

50/60
Hz

 IK08

 +45°C
-25°C


 CCT
SWITCH

 POWER
70%-100%



Mac floor

Mac floor XL

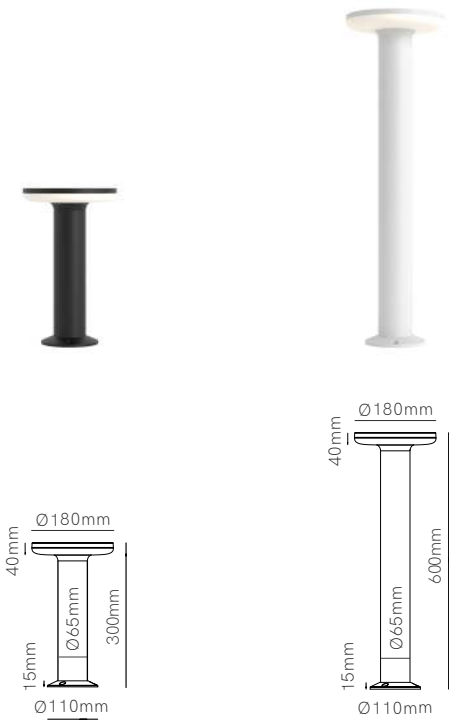



Technical Information

Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	890 lm / 900 lm	890 lm / 900 lm
Material	Aluminium and Polycarbonate	Aluminium and Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	○ 3.000K 4837 ○ 4.000K 4838 ● 3.000K 4839 ● 4.000K 4840 ● 3.000K 4841 ● 4.000K 4842	○ 3.000K 4843 ○ 4.000K 4844 ● 3.000K 4845 ● 4.000K 4846 ● 3.000K 4847 ● 4.000K 4848

1/12


1/6

Accessories






Tura



Tura XL



Technical Information

Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	950 lm / 960 lm	950 lm / 960 lm
Material	Aluminium and Methacrylate	Aluminium and Methacrylate
Finishes	White / Black / Corten	White / Black / Corten
Code	○ 3.000K 4849 ○ 4.000K 4850 ● 3.000K 4851 ● 4.000K 4852 ● 3.000K 4853 ● 4.000K 4854	○ 3.000K 4855 ○ 4.000K 4856 ● 3.000K 4857 ● 4.000K 4858 ● 3.000K 4859 ● 4.000K 4860

1/6

1/4

Accessories




Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673




3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 180° | | 50/60 Hz | IK06 | +50°C / -20°C




Linear Joint IP68



T Joint IP68



X Joint IP68



Technical Information

Material	Polyamide and Polycarbonate	Polyamide and Polycarbonate	Polyamide and Polycarbonate
Finishes	Black	Black	Black
Code	● 5671	● 5672	● 5673



3 YEARS WARRANTY

IP 68


16A 240 VAC

+85°C
-45°C






Solar

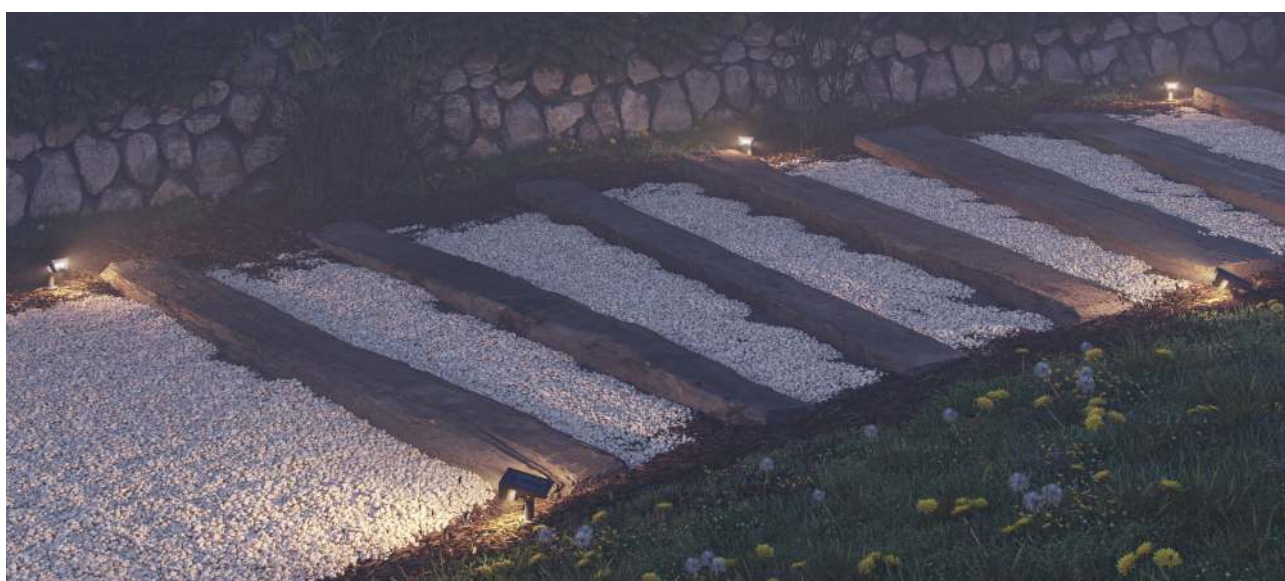

Gam



Technical Information

Power	0,7W
Installation	Floor
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	85 lm
Material	ABS + PMMA
Finishes	Black
Code	■ 5178

CE RoHS

3 YEARS WARRANTY

2 YEARS WARRANTY

20.000 HOURS

6-8 HOURS

6-8H.

1.800 mAh

IP 54

CRI ≥80

270°

IK02

+55°C -10°C


ON OFF

CCT SWITCH

1/50



Twist



Technical Information

Power	1W
Installation	Floor
Color Temperature	Switch 2.700K / RGB
Lumens	20 lm
Material	ABS
Finishes	Black
Code	5701



3 YEARS WARRANTY

1 YEARS WARRANTY

10.000 HOURS

7-8 HOURS

5-8H.

500 mAh

IP 54

CRI ≥80


180°

+45°C / 0°C

ON OFF

CCT SWITCH



1/20

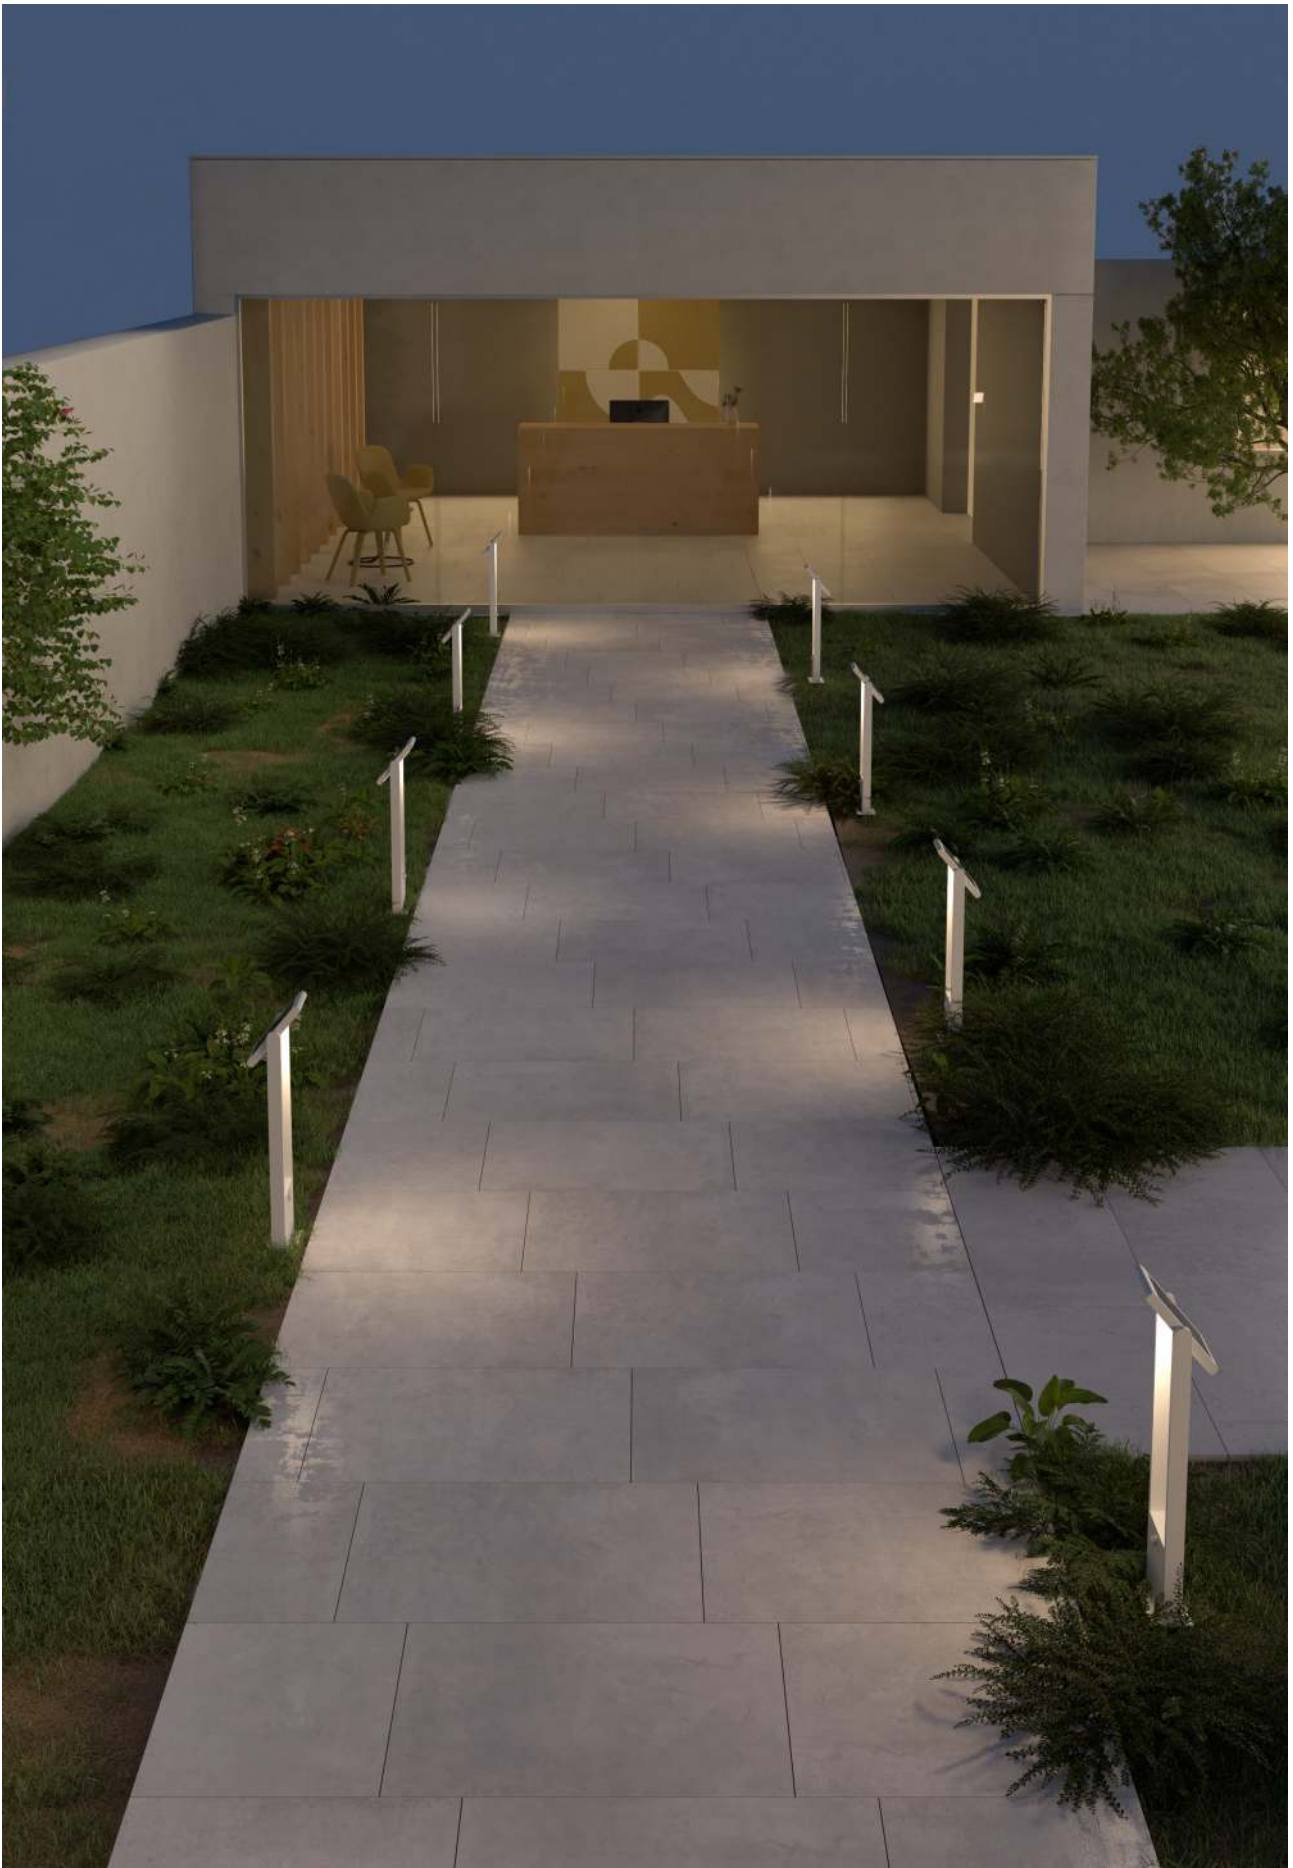

Popa



Popa XL

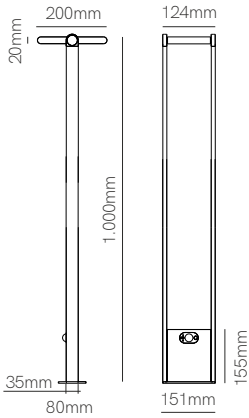

Technical Information

Power	1,6W	1,6W
Installation	Floor	Floor
Color Temperature	4.000K	4.000K
Lumens	150 lm	150 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 3882 ☒ 3883	☐ 3884 ☒ 3885



3 YEARS WARRANTY

2 YEARS WARRANTY

20.000 HOURS

5-6 HOURS

15% 10H. 100% 2-3H.

2.200 mAh

IP 54

CRI ≥80

120°

IK08

+45°C -25°C

PIR SENSOR


ON OFF

8 sec 8 min

1/2



Proa



Technical Information

Power	1,6W
Installation	Surface
Color Temperature	4.000K
Lumens	150 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3531 ☒ 3532



3 YEARS WARRANTY

2 YEARS WARRANTY

20.000 HOURS

5-6 HOURS

15% 100% 10H. 2-3H.

2.200 mAh

IP 54

CRI ≥80

120°

IK08

+45°C -25°C

PIR SENSOR


ON OFF

8 sec 8 min

1/6



Egna



Technical Information

Power	3W
Installation	Surface
Color Temperature	4.000K
Lumens	250 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3587 ☒ 3592

CE RoHS


3 YEARS WARRANTY | 2 YEARS WARRANTY | 25.000 HOURS | 5-6 HOURS | 11% 20H. 100% 2-3H. | 4.500 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 1/8



▶ VIDEO



Iris



Technical Information

Power	2,5W
Installation	Surface
Color Temperature	4.000K
Lumens	174 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3496
	☒ 3497



3 YEARS WARRANTY

2 YEARS WARRANTY

20.000 HOURS

5-6 HOURS

15% 10H. 100% 2-3H.

2.200 mAh

IP 54

CRI ≥80

120°

IK08

+45°C -25°C

PIR SENSOR


ON OFF

8 sec 8 min

1/6



Visor solar



Technical Information

Power	3,5W
Installation	Portable
Color Temperature	3.000K
Lumens	460 lm
Material	Aluminium
Finishes	White / Black / Corten

Code	☐ 4209
	☒ 4193
	☐ 4194



3 YEARS WARRANTY

2 YEARS WARRANTY

30.000 HOURS

10 HOURS

8 HOURS

4.500 mAh

IP 65


CRI ≥80

120°


+45°C
-25°C

ON OFF

1/4

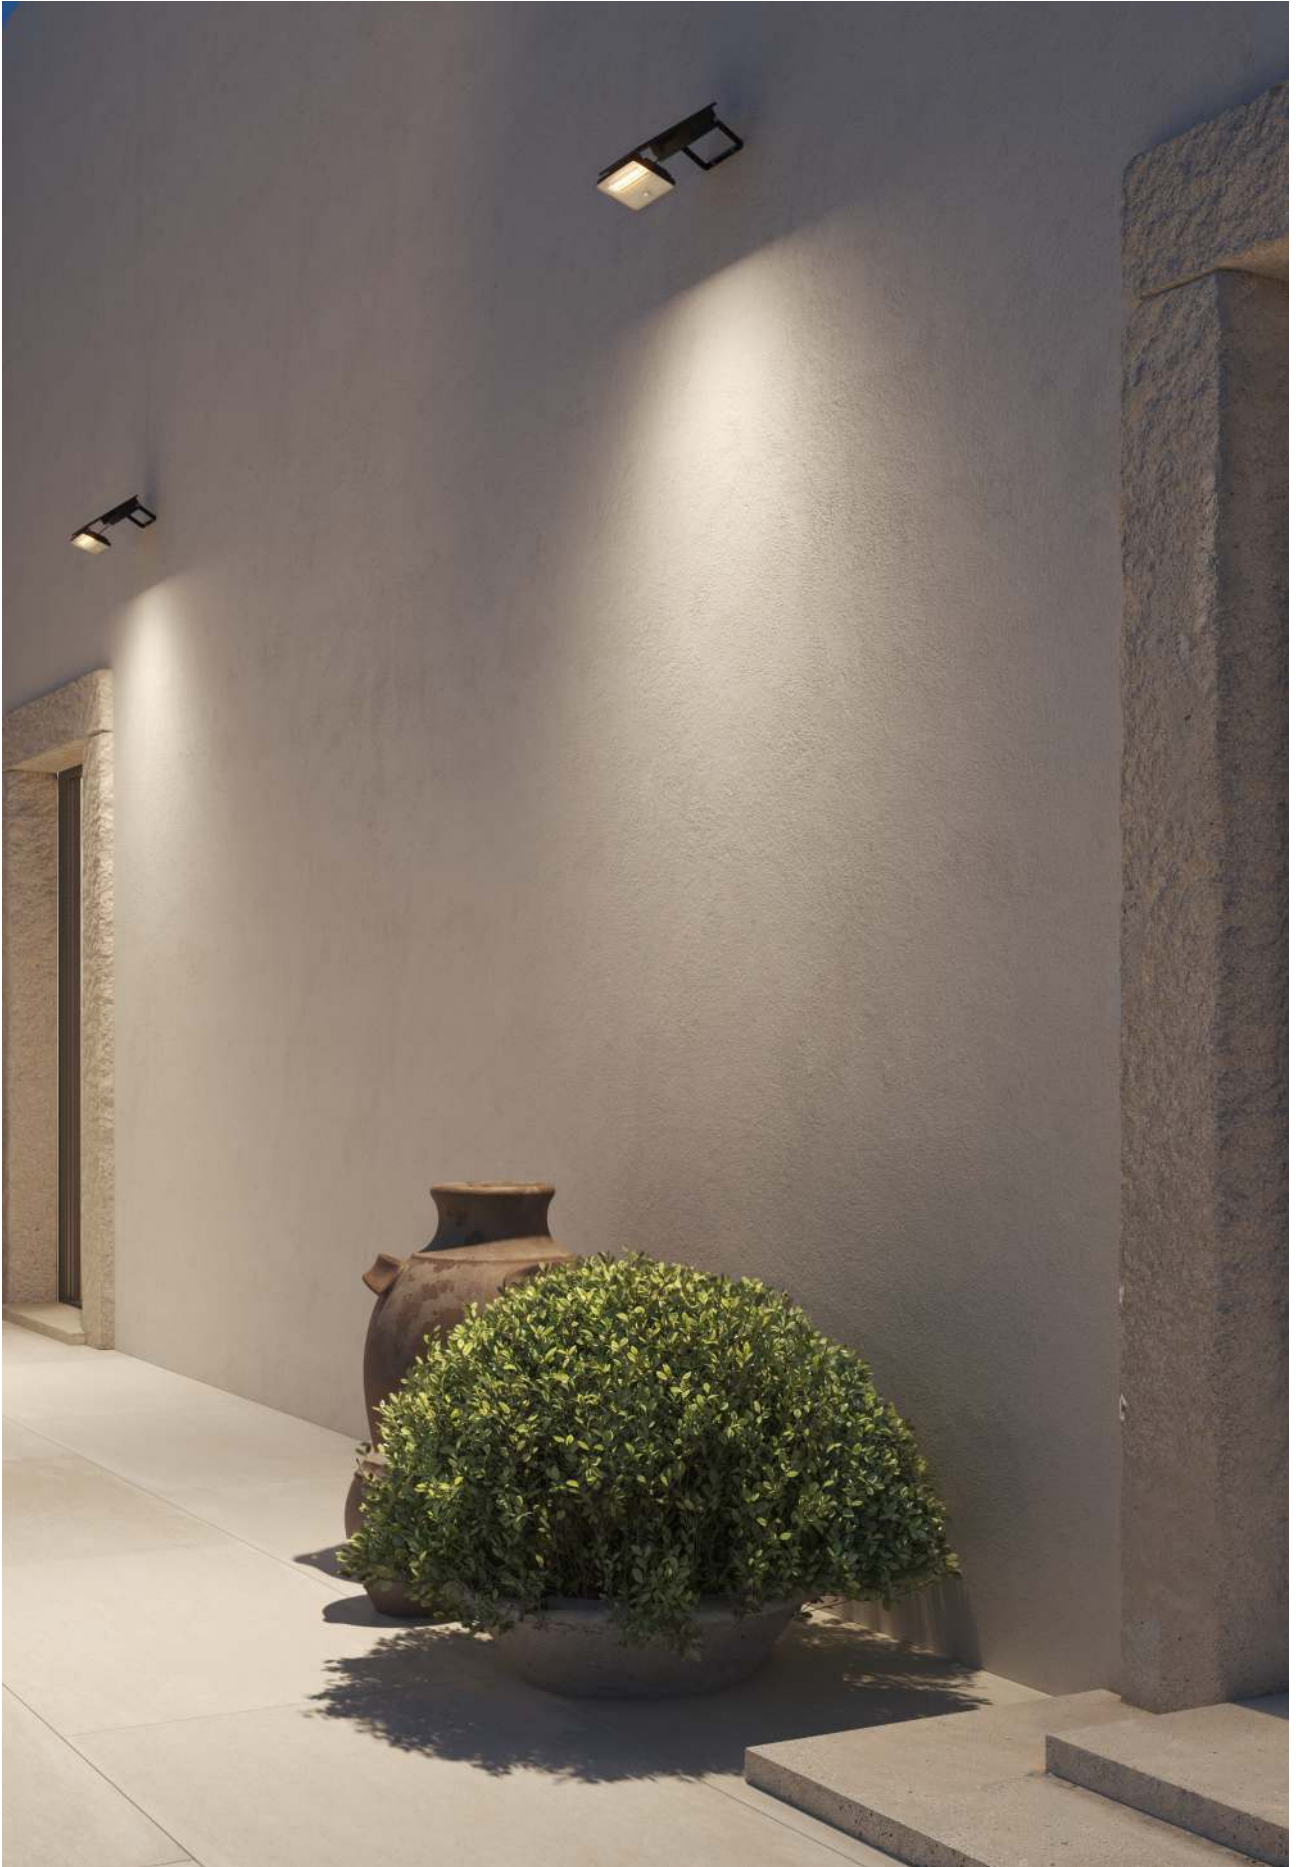


Sky solar sensor

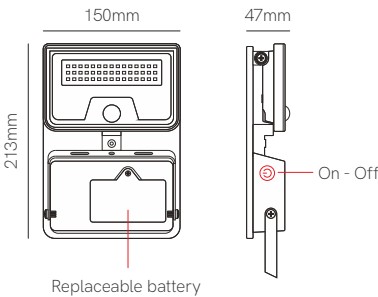

Technical Information

Power	8W
Installation	Surface
Color Temperature	4.000K
Lumens	1.600 lm
Material	Polycarbonate
Finishes	White / Black
Code	☐ 5572 ☒ 5573






► VIDEO






Industrial

Ufo Lens switch
60W / 80W / 100W




Ufo Lens switch
90W / 120W / 150W





Technical Information

Power	Switch 60W / 80W / 100W	Switch 90W / 120W / 150W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	131-167 lm/W	128-167 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5147	● 5148


Accessories




Lira 100W/150W/200W
■ 4566



Ufo Lens switch
120W / 160W / 200W




Ufo Lens switch
140W / 190W / 240W




Technical Information

Power	Switch 120W / 160W / 200W	Switch 140W / 190W / 240W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	123-169 lm/W	125-156 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5149	● 5150


Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567



5 YEARS WARRANTY

50.000 HOURS

 → 

IP 65

100/260 VAC

PF >0,9

CRI ≥80



CABLE 2M

60° 90° 110°

50/60 Hz



 +45°C -25°C

 CCT SWITCH

 POWER SWITCH



>6KV



1

Ufo Lens Dali 100W


Ufo Lens Dali 150W





Technical Information

Power	100W	150W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K
Lumens	16.000 lm / 16.200 lm	24.000 lm / 24.200 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 4.000K 4915	● 4.000K 4917
	● 5.000K 4916	● 5.000K 4918

Accessories





Lira 100W/150W/200W
■ 4566



Ufo Lens Dali 200W


Ufo Lens Dali 240W




Technical Information

Power	200W	240W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K
Lumens	32.000 lm / 32.200 lm	38.400 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 4.000K 4919 ● 5.000K 4920	● 4.000K 4921


Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567



5 YEARS WARRANTY

50.000 HOURS

 → 

IP 65

100/260 VAC

PF >0,9

CRI ≥80



CABLE 2M

 60° 90° 120°

50/60 Hz

 IK10

 +50°C -30°C

>4KV 









Rotable
Lens

60°



90°



120°



Ufo lens
100W

1m	5m	11m
9.113 lx	365 lx	75 lx

1m	5m	10m
7.867 lx	315 lx	79 lx

1m	5m	10m
6.638 lx	266 lx	66 lx

Ufo lens
150W

1m	7m	14m
13.670 lx	279 lx	70 lx

1m	6m	13m
11.800 lx	328 lx	70 lx

1m	6m	12m
9.956 lx	277 lx	69 lx

Ufo lens
200W

1m	8m	16m
18.226 lx	225 lx	71 lx

1m	7m	15m
15.733 lx	321 lx	70 lx

1m	7m	14m
13.275 lx	271 lx	68 lx

Ufo lens
240W

1m	9m	19m
26.635 lx	329 lx	74 lx

1m	9m	19m
26.654 lx	292 lx	73 lx

1m	9m	19m
15.882 lx	324 lx	68 lx







Retrofit


Hook GU10

Hook GU10 dimmable



Technical Information

Power	6W		6W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	570 lm / 594 lm / 616 lm		570 lm / 594 lm / 616 lm	
Code	2.700K	4023	2.700K	3654-N
	3.000K	4024	3.000K	3655-N
	4.000K	4025	4.000K	3656-N



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥80


60°

50/60 Hz


+40°C
-20°C

10/50


Uniform-line MR16



Uniform-line GU10




Uniform-line GU10
dimmable



Technical Information

Power	6W		6W		6W	
Color Temperature	2.700K/3.000K/4.000K/5.000K		2.700K/3.000K/4.000K/5.000K		2.700K / 3.000K / 4.000K	
Lumens	480 lm/510 lm/545 lm/560 lm		480 lm/510 lm/545 lm/560 lm		490 lm / 500 lm / 530 lm	
Code	2.700K	4019-V2	2.700K	4015-V2	2.700K	4227
	3.000K	4020-V2	3.000K	4016-V2	3.000K	4228
	4.000K	4021-V2	4.000K	4017-V2	4.000K	4229
	5.000K	4022-V2	5.000K	4018-V2		
		12V AC/DC			220/240 VAC	220/240 VAC
						 DIMM



5 YEARS WARRANTY | 50.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 120°  | 50/60 Hz |  +40°C -20°C |  10/50

Narrow GU10 dimmable



Technical Information

Power	7W	
Color Temperature	2.700K / 3.000K	
Lumens	400 lm / 420 lm	
Code	2.700K	4672
	3.000K	4671



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,8

CRI ≥80

15°

50/60 Hz

DIMM

+40°C
-20°C

10/50

System MR16



System GU10




System GU10 dimmable



Technical Information

Power	8W		8W		8W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	725 lm / 780 lm / 825 lm		725 lm / 780 lm / 825 lm		660 lm / 700 lm / 750 lm	
Code	2.700K	3435-N	2.700K	3432-N	2.700K	3492-N
	3.000K	3436-N	3.000K	3433-N	3.000K	3493-N
	4.000K	3437-N	4.000K	3434-N	4.000K	3494-N
12V AC/DC		220/240 VAC		220/240 VAC		 DIMM



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60°  | 50/60 Hz |  +40°C -20°C | 

R-63 s-line GU10



Technical Information

Power	8W
Color Temperature	2.700K
Lumens	720 lm
Code	4003

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 220/240 VAC | PF >0,8 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Power MR16



Power GU10




Power GU10 dimmable



Technical Information

Power	12W		10W / 12W		12W
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K
Lumens	900 lm / 950 lm / 1.000 lm		950 lm / 1.000 lm / 1.050 lm		950 lm / 1.000 lm / 1.050 lm
Code	2.700K	3441	12W 2.700K	3438	2.700K 3489
	3.000K	3442	10W 3.000K	4295	3.000K 3490
	4.000K	3443	10W 4.000K	4296	4.000K 3491
		12V AC/DC			220/240 VAC
					220/240 VAC
					DIMM



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Lynk G53



Lynk GU10




Lynk GU10 dimmable



Technical Information

Power	13W		13W		13W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	880 lm / 900 lm / 950 lm		880 lm / 900 lm / 950 lm		880 lm / 900 lm / 950 lm	
Code	2.700K	3452	2.700K	3455	2.700K	3464
	3.000K	3453	3.000K	3456	3.000K	3465
	4.000K	3454	4.000K	3457	4.000K	3466
12V AC/DC			220/240 VAC		220/240 VAC	
					DIMM	



3 YEARS WARRANTY

25.000 HOURS

IP 40

PF >0,9

CRI ≥80


45°

50/60 Hz


+40°C
-20°C

10/30

AR111 15° G53



AR111 15° GU10



Technical Information


Power	15W		15W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	1.350 lm / 1.400 lm / 1.500 lm		1.350 lm / 1.400 lm / 1.500 lm	
Code	2.700K	5187	2.700K	5190
	3.000K	5188	3.000K	5191
	4.000K	5189	4.000K	5192
PF >0,5 12V AC/DC		PF >0,9 220/240 VAC		



3 YEARS WARRANTY | 15.000 HOURS | IP 20 | CRI ≥80 | 15° | 50/60 Hz | +40°C -20°C | 10/30

Nitro GU10

Dole GU10

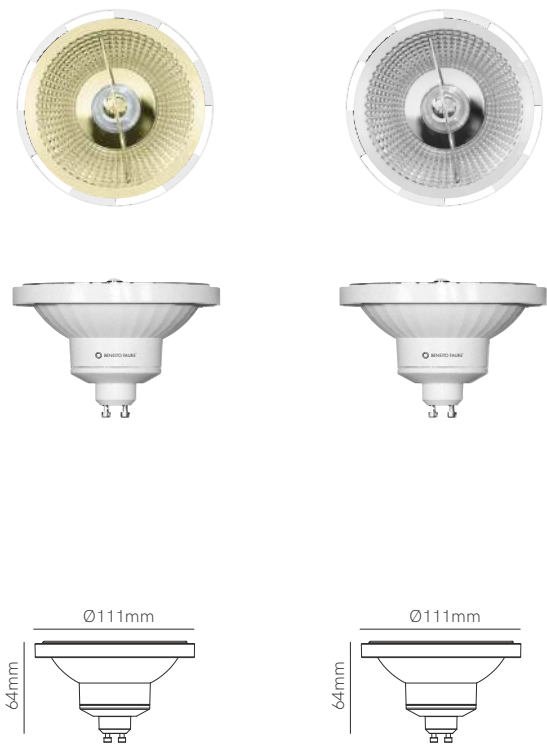

Technical Information



Power	15W	15W
Color Temperature	2.700K	2.700K / 3.000K / 4.000K
Lumens	1.000 lm	1.050 lm / 1.100 lm / 1.120 lm
Code	3470	2.700K 3467
		3.000K 3468
		4.000K 3469



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C / -20°C | 10/30

Shop E14

Prisma E14



Shop




Prisma



Technical Information

Power	2W	4W
Color Temperature	3.000K	3.000K
Lumens	180 lm	340 lm
Code	3450	3474-M



3 YEARS WARRANTY

25.000 HOURS

IP 44

220/240 VAC

PF >0,3

CRI ≥80

360°



50/60 Hz

+40°C
-20°C

10/50


Flama E14/E27

Flama dimmable E14



Technical Information

Power	5,5W			5,5W	
Color Temperature	2.700K / 3.000K / 5.000K			3.000K	
Lumens	450 lm / 500 lm / 550 lm			418 lm	
Code	2.700K	E14	592122-FL2	3.000K	592122R-C3
	2.700K	E27	592122-FL2E		
	3.000K	E14	592122-FL3		
	3.000K	E27	592122-FLE3		
	5.000K	E14	3534		



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,8

CRI ≥80


360°

50/60 Hz


+40°C -20°C

10/50


Esférica 5W E14/E27



Esférica 5,5W E14/E27
dimmable



Esférica 7W E14/E27



Technical Information


Power	5W	5,5W	7W
Color Temperature	2.700K/3.000K/4.000K/5.000K	2.700K / 3.000K / 4.000K	2.700K/3.000K/4.000K/5.000K
Lumens	440 lm/462 lm/484 lm/495 lm	396 lm / 418 lm / 440 lm	700 lm/750 lm/800 lm/820 lm

Code	2.700K E14	592563-4C2(N)	2.700K E14	592563R-C2	2.700K E14	4243
	2.700K E27	5925631-4C2(N)	2.700K E27	592563R1-C2	2.700K E27	4244
	3.000K E14	592563(N)-4C(N2)	3.000K E14	592563R-C3	3.000K E14	4245
	3.000K E27	5925631(N)-4C(N2)	3.000K E27	592563R1-C3	3.000K E27	4246
	4.000K E14	592563(N)-4F(N2)	4.000K E14	592563R-F4	4.000K E14	4247
	4.000K E27	5925631(N)-4F(N2)	4.000K E27	592563R1-F4	4.000K E27	4248
	5.000K E14	3538(N)			5.000K E14	4249
	5.000K E27	3537(N)			5.000K E27	4250

5 YEARS WARRANTY | 50.000 HOURS | IP 40


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | DIMM

3 YEARS WARRANTY | 25.000 HOURS | IP 20




220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Standard 6W E27



Standard 9W E27



Technical Information

Power	6W		9W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K	
Lumens	534 lm / 550 lm / 660 lm		880 lm/891 lm/935 lm/945 lm	
Code	2.700K	592125S-6(N)	2.700K	592125SC-2(N)
	3.000K	592125S-6C(N)	3.000K	592125SC-3(N)
	4.000K	592125S-6F(N)	4.000K	592125SC-4(N)
			5.000K	3539(N)



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥80

360°



50/60 Hz

+40°C
-20°C

10/50


Standard 12W E27

Standard 15W E27



Technical Information

Power	12W		15W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	1.100 lm / 1.122 lm / 1.144 lm		1.550 lm / 1.600 lm / 1.650 lm	
Code	2.700K	3479(N)	2.700K	3482(N)
	3.000K	3480(N)	3.000K	3483(N)
	4.000K	3481(N)	4.000K	3484(N)



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥80


360°

50/60 Hz


+40°C / -20°C

10/50


Standard 10W E27
dimmable



Standard 12W E27
dimmable



Standard 17W E27
dimmable



Technical Information

Power	10W		12W		17W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K	
Lumens	880 lm / 891 lm / 935 lm		1.100 lm / 1.122 lm / 1.144 lm		1.550 lm / 1.600 lm / 1.650 lm / 1.700 lm	
Code	2.700K	592125R-C	2.700K	592125R2-C	2.700K	3527
	3.000K	592125R-C3	3.000K	592125R2-C3	3.000K	3528
	4.000K	592125R-F	4.000K	592125R2-F	4.000K	3529
					5.000K	3530



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥80

360°


50/60 Hz

DIMM


+40°C
-20°C

10/50


Micro globo 6W E27



Globo 10W E27



Globo 10W E27
dimmable




Technical Information

Power	6W	10W	10W
Color Temperature	2.700K / 3.000K	2.700K / 3.000K / 4.000K	3.000K
Lumens	480 lm / 500 lm	1.100 lm / 1.130 lm / 1.180 lm	800 lm
Code	2.700K 505143E-C 3.000K 3881	2.700K 3524 3.000K 3525 4.000K 3526	3.000K 505119DIM-C
	5 YEARS WARRANTY 50.000 HOURS	3 YEARS WARRANTY 25.000 HOURS	3 YEARS WARRANTY 25.000 HOURS DIMM




IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C -20°C |  10/40


Globo 15W E27



Globo 16W E27



Globo 22W E27



Technical Information

Power	15W	16W	22W
Color Temperature	2.700K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	1.400 lm / 1.500 lm	1.600 lm / 1.700 lm / 1.750 lm	2.400 lm / 2.500 lm / 2.600 lm
Code	2.700K 4677	2.700K 3521	2.700K 3518
	4.000K 4678	3.000K 3522	3.000K 3519
		4.000K 3523	4.000K 3520



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥80


360°

50/60 Hz


+40°C / -20°C

10/40


R-39 E14



R-50 E14



R-63 E27



R-39



R-50




R-63




Technical Information

Power	3W	5W	8W
Color Temperature	3.000K	3.000K	3.000K
Lumens	308 lm	385 lm	660 lm
Code	592122R39-2	5920731-(N2)	592072-1
	IP 40	IP 40	IP 20




3 YEARS WARRANTY | 25.000 HOURS | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50


R-80 E27



R-90 2.200K E27



R-90 3.000K E27



R-80



R-90



Technical Information

Power	10W	12W	12W
Color Temperature	3.000K	2.200K	3.000K
Lumens	891 lm	850 lm	1.100 lm
Code	592076-C3(N)	4137	592074-C(N)




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/40

PI T40 E27




Technical Information


Power	10W	
Color Temperature	3.000K / 4.000K	
Lumens	825 lm / 880 lm	
Code	3.000K	582L016T40E-C3
	4.000K	582L016T40E-F




Par 30 E27



Par 38 3.000K E27



Par 38 Green E27



PAR 30




PAR 38



Technical Information

Power	10W	15W	15W
Color Temperature	3.000K	3.000K	GREEN
Lumens	660 lm	1.100 lm	190 lm
Code	171160P30-C	171160P38(N)-C	3579
	45°	30°	30°




3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 10/40

Sil E27





Technical Information

Power	20W	
Color Temperature	2.700K / 4.000K	
Lumens	2.035 lm / 2.550 lm	
Code	2.700K	592165SIL-C
	4.000K	592165SIL-F



Aria 30W E27/E40

Aria 50W E27/E40



Technical Information

Power	30W			50W		
Color Temperature	2.700K / 5.000K			2.700K / 5.000K		
Lumens	3.100 lm / 3.550 lm			5.400 lm / 6.200 lm		
Code	2.700K	E27	3854	2.700K	E27	3858
	2.700K	E40	3856	2.700K	E40	3860
	5.000K	E27	3855	5.000K	E27	3859
	5.000K	E40	3857	5.000K	E40	3861



3 YEARS WARRANTY

25.000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥80

360°

50/60 Hz

+40°C
-20°C



> 1KV

ENCLOSED NO

6/24


Obo 19W E27

Obo 27W E27



Technical Information

Power	19W	27W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K
Lumens	1.425 lm / 1.900 lm	2.025 lm / 3.000 lm
Code	2.200K 3909 5.000K 3917	2.200K 3910 5.000K 3918



5 YEARS WARRANTY

50.000 HOURS

IP 64

100/240 VAC

PF >0,9

CRI ≥70 2.200K

CRI ≥80 5.000K

170°

50/60 Hz

+60°C -40°C



> 4KV

ENCLOSED OK

16

Obo 36W E27/E40

Obo 45W E27/E40



Technical Information

Power	36W	45W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K
Lumens	2.700 lm / 3.900 lm	3.375 lm / 4.500 lm
Code	2.200K E27 3911	2.200K E27 3912
	2.200K E40 3920	2.200K E40 3923
	5.000K E27 3919	5.000K E27 3922
	5.000K E40 3921	5.000K E40 3924



5 YEARS WARRANTY

50.000 HOURS

IP 64

100/240 VAC

PF >0,9

CRI ≥70 2.200K

CRI ≥80 5.000K

170°

50/60 Hz


+60°C -40°C

> 4KV


ENCLOSED OK

16



Smile 20W E27



Smile 40W E27




Smile 60W E40




Technical Information

Power	20W	40W	60W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K	2.200K / 5.000K
Lumens	2.000 lm / 3.000 lm	4.000 lm / 6.000 lm	6.000 lm / 9.000 lm
Code	2.200K 3913	2.200K 3914	2.200K 3915
	5.000K 3925	5.000K 3926	5.000K 3927
	24	12	12



5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 120° | 50/60 Hz | -40°C +60°C | > 4KV | ENCLOSED OK

Cup 45W E27/E40



Technical Information

Power	45W
Color Temperature	3.000K
Lumens	3.960 lm
Code	3.000K E40 592141-E4C3



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,8

CRI ≥80


100°

50/60 Hz


+40°C
-20°C

ENCLOSED NO

Noa 80W E27/E40



Noa 85W E27/E40




Technical Information

Power	80W	85W
Color Temperature	2.200K	2.700K / 5.000K
Lumens	5.900 lm	9.700 lm / 10.200 lm
Code	2.200K E27/ E40 3965	2.700K E27 3902 2.700K E40 3900 5.000K E27 3903 5.000K E40 3901



3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C -20°C | ENCLOSED NO  |  8

Adn G4



Technical Information

Power	2,5W
Color Temperature	3.000K
Lumens	198 lm
Code	130L006



3 YEARS WARRANTY

25.000 HOURS

IP 40

12V AC/DC

PF >0,6

CRI ≥80


360° 

50/60 Hz


 +40°C -20°C



Uniform-line G4




Uniform-line long G4




Technical Information

Power	1,3W	1,6W
Color Temperature	3.000K / 5.000K	3.000K / 5.000K
Lumens	150 lm / 158 lm	203 lm / 223 lm
Code	3.000K 130L006-2 5.000K 130L006-2F	3.000K 130L195-C 5.000K 130L195-D




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C -20°C | 

Uniform-line G9




Uniform-line long G9



Technical Information

Power	2,5W	2,8W
Color Temperature	3.000K / 5.000K	3.000K / 5.000K
Lumens	242 lm / 250 lm	308 lm / 314 lm
Code	3.000K 130L184-5 5.000K 130L184-5F	3.000K 130L195-A 5.000K 130L195-B



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,8

CRI ≥80


360°

50/60 Hz

+40°C
-20°C


10/50

Max BA15d



Technical Information



Power	7W
Color Temperature	2.700K
Lumens	500 lm
Code	3569



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 24° | 50/60 Hz | +40°C -20°C | 6/30

Cala 9W G24

Cala 10W G24



Technical Information

Power	9W	10W
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	880 lm / 935 lm	1.100 lm / 1.155 lm
Code	3.000K 582L015-C3	3.000K 582L015-C3B
	4.000K 582L015-F4	4.000K 582L015-F4B






3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 135° | 50/60 Hz | +40°C -20°C | 10/50

Lineal tubular 5W R7S


Lineal tubular 9W R7S

Lineal tubular 9W R7S
dimmable



Technical Information

Power	5W		9W		9W	
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K	
Lumens	561 lm / 574 lm		935 lm / 1.000 lm		935 lm / 1.000 lm	
Code	3.000K	140026-C3T	3.000K	141123-TC3	3.000K	141123-TC3D
	4.000K	140026-F4T	4.000K	141123-TF4	4.000K	141123-TF4D
		3 YEARS WARRANTY			3 YEARS WARRANTY	4 YEARS WARRANTY
						DIMM



25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C -20°C | 

Lineal 9W R7S



Lineal tubular 11W R7S
dimmable



Lineal 13W R7S



Technical Information


Power	9W		11W		13W	
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K / 5.000K	
Lumens	858 lm / 880 lm		1.210 lm / 1.280 lm		1.700 lm / 1.780 lm / 1.800	
Code	3.000K	140L026L	3.000K	3477	3.000K	3904
	4.000K	140L0261L	4.000K	3478	4.000K	3905
					5.000K	3906

IP 20 | 120°

IP 40 | 360°

DIMM

IP 40 | 160°



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,9


CRI ≥80

50/60 Hz


+40°C -20°C

6/30


HQI tubular E27



HQI tubular G12




HQI tubular RX7S



Technical Information

Power	10W	10W	13W
Color Temperature	3.000K / 4.000K	3.000K / 4.000K	3.000K / 4.000K
Lumens	1.000 lm / 1.030 lm	1.000 lm / 1.030 lm	1.320 lm / 1.375 lm
Code	3.000K 3570	3.000K 592063-G12/3	3.000K 592063-TC
	4.000K 3571	4.000K 592063-G12/4	4.000K 592063-TF
10/50		10/50	6/30



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C / -20°C



Conditions



INTERNET UPDATE - PDF

Our interest in new solutions and for the development of lighting technology and lighting industry, we are constantly innovating. This is why BENEITO FAURE offers to its customers a frequently online updated PDF to inform about all our news.

You can find all the information on our website:

www.beneito-faure.com

IMPORTANT:

All information on the website can be cancelled and replaced by another one, and will be the last update the only right one.

For this reason is very important to visit our web.



ACTUALIZACIÓN DIGITAL - PDF

Nuestra implicación desde BENEITO FAURE por una continua elaboración de soluciones avanzadas, junto al progresivo cambio tecnológico de la industria de la iluminación en los últimos años, nos hace estar en constante innovación.

Por ello, ponemos al servicio de todos nuestros clientes una actualización frecuente on-line (formato PDF) con la intención de tenerlos informados en todo momento de las últimas novedades de BENEITO FAURE.

La mencionada actualización se encuentra disponible en nuestra página WEB:

www.beneito-faure.com

IMPORTANTE:

Cualquier información publicada quedará anulada y sustituida por la que aparece en cada momento en nuestra WEB, siendo esta la única con validez y vigencia de gama y precios de venta recomendados.

Por ello, desde Beneito Faure recomendamos a todos nuestros clientes visiten nuestra página web.



GENERAL CONDITIONS OF SALE

BENEITO FAURE S.L reserves the right to make the variations it deems appropriate to its products, not being responsible for the possible erroneous information that appears in the catalog.

RATE

For any type of order the rate and conditions in force at the time of receipt of the order will apply. The rate will be sent via email to all customers in the BENEITO FAURE database and will be updated whenever necessary. Prices do not include VAT if recycling rate.

ORDERS

Orders must be sent via email. No order will be placed by phone or any other means. The quote of the material to be made to measure will be sent to the customer for acceptance and will not be processed prior receiving the copy signed for acceptance.

RETURNS

To make any return, the authorization must be requested from BENEITO FAURE. The return of the material must be communicated by e-mail indicating the customer's name, the reason of the return, the date of purchase, the number of units and the reference of the product to be returned. It is mandatory to attach a copy of the purchase invoice. The acceptance of the return does not imply the definitive acceptance of it. The return will be definitive only after the subsequent verification and analysis of the product by our technical department. Returns of merchandise will only be accepted if in perfect condition for sale and in the original packaging in good condition. The packaging label must also be intact. Returns will not be compensated by an economic amount and must be sent by means of the client's transport. The return of material may be compensated by prior order and with the authorization of BENEITO FAURE. The return of the products made to measure or previously processed by the technical department due to the customer's request, will not be accepted.

TRANSPORT

Unless other transport terms are agreed, the merchandise will travel on behalf of those purchased with the EXWORKS conditions. Likewise, BENEITO FAURE will offer a delivery time for each territory, this being always approximate. The company will not be responsible for possible alterations or delays on this time caused by causes outside the company.

PROPERTY RESERVATION

BENEITO FAURE reserves the right to own all the materials that it supplies until the buyer has paid the total amount thereof.

The requested goods are supplied under reservation of ownership in favor of BENEITO FAURE

The client is obliged to cooperate and take all steps necessary or desirable, and to propose or need to BENEITO safeguard their ownership of the goods. The serve of domain remains even in the event that the client had accepted and recognized credits against BENEITO or had established a system of accounts between them. The transformation or improvement of goods on which BENEITO has reserve domain, does not give property to client or manipulative. In case of union, transformation and/or accession of goods under domain's reserve to thirds, subsist the domain's reserve in proportion to the value that the goods subject had to domain's reserve before to accession. The client may sell the goods subject to domain's reserve in the ordinary course of business, provided those no breach his payment obligations to BENEITO. Upon a resale of goods subject to domain's reserve, occurs automatically the transfer to BENEITO of credits arising of that sale to the seller, and any other credit arising in the case of compensation for loss of thing, tort-contract, etc. in such cases, the client is obliged to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obligated to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obliged it to give them. If before performed the pay of total price, the goods sold were affected by some lien or lock, the client shall be obliged to state explicitly in the diligence of the embargo, that the goods are owned by BENEITO and if, despite this, were seized, must facilitate to BENEITO the exercise by the relevant third domain action, whose expenses will be paid by the client.

DELIVERY TERM

The availability terms offered by BENEITO FAURE are always approximate and may be subject to variations. These possible variations in the terms will not imply the acceptance of the responsibility or penalties for the delay by BENEITO FAURE.

CLAIMS

On the delivery note of the carrier, any visible anomaly must be recorded and, after having reviewed the material, communicate in writing to our offices the incident within 24 hours of receiving the merchandise. Once this time has elapsed, the company will not be able to take charge of the claim because it is not in time for the transport agency. For other types of claims, you must contact our offices by written email. The product that does not work correctly will be replaced by the same article or another with the same characteristics. In no case will we be responsible for the costs of labor that may be caused by the malfunction of a product in our catalog.

WARRANTY

BENEITO FAURE guarantees that the products sold are in perfect condition. The warranty will cover the repair or replacement of the product (under the decision of BENEITO FAURE) and it will be necessary to send the incident by email. The product warranty is in its packaging. The technical department of BENEITO FAURE will be the only one authorized to determine if it is a manufacturing defect, after receiving the incident and the sales invoice in writing for prior verification. BENEITO FAURE quantifies the warranty time considering the date of the customer's purchase invoice and not on the hours of operation of the product.

The WARRANTY will not be covered:

1. If the product has been previously handled.
2. It is not installed according to the instructions.
3. If the ventilation of which is not adequate.
4. Problems with partial or total payment by the client.

JURISDICTION

In any discrepancy or dispute, both parties will submit to the jurisdiction of the Judges and courts of Barcelona.



CONDITIONS GÉNÉRALES DE VENTE

BENEITO FAURE S.L. se réserve le droit de faire les variations qu'elle juge appropriées à ses produits n'étant pas responsable de toute information erronée qui apparaît dans le catalogue.

TARIF

Pour tout type de commande, nous appliquerons les tarifs et conditions en vigueur au moment de la réception de la commande. Le tarif sera envoyé par e-mail à tous les clients qui sont dans la base de données de BENEITO FAURE et sera mis à jour si nécessaire. Les prix n'incluent pas la TVA.

COMMANDES

Les commandes doivent être envoyées par EMAIL. Aucune commande ne sera passée par téléphone ou par tout autre moyen. Les devis de matériel qui doit être manipulé sur mesure seront soumis au client pour validation et ne seront pas traités avant de recevoir la copie signée du bon pour accord.

RETOURS

Pour tout retour, une autorisation préalable doit être demandée à BENEITO FAURE. Il faudra communiquer le motif du retour par courrier électronique en indiquant le nom du client, la date d'achat, les unités et la référence du produit retourné, le motif du retour et le bon de livraison concerné. L'acceptation du retour n'implique pas l'acceptation définitive de celui-ci. Le retour ne sera définitif qu'après vérification et analyse du produit par notre service technique. Les retours de marchandises ne seront acceptés que si le matériel est en parfait état pour la vente et dans son emballage d'origine en bon état, ainsi que l'étiquette de l'emballage. Les retours ne seront pas compensés par un montant économique et ils devront être envoyés par le biais du transport du client. Le retour du matériel peut être compensé au moyen d'une commande préalable et avec l'autorisation de BENEITO FAURE. Nous n'accepterons pas les retours de produits de fabrication spéciale ou préalablement manipulés par le service technique à la demande du client.

TRANSPORT

Sauf convention contraire, les marchandises voyagent pour le compte de ceux qui achètent aux conditions EXWORKS. De même, BENEITO FAURE proposera un délai de livraison pour chaque territoire, toujours approximatif. La société ne sera pas responsable d'éventuelles modifications ou retards sur ce délai produits par des causes externes à la société.

RÉSERVE DE PROPRIÉTÉ

BENEITO FAURE se réserve la propriété de tous les matériaux qu'elle fournit jusqu'au paiement intégral par l'acheteur.

La marchandise commandée est livrée sous réserve de propriété en faveur de BENEITO FAURE jusqu'à l'exécution complète des obligations de paiement du client.

Le client est tenu de coopérer et de prendre les mesures nécessaires et celles que BENEITO FAURE propose pour préserver sa propriété des marchandises. La réservation du domaine persiste même si le client a accepté et reconnu des crédits sur BENEITO FAURE ou si un système de comptes courants a été établi entre eux. La transformation ou l'amélioration de la marchandise sur laquelle BENEITO FAURE a une réserve de propriété ne confère pas sa propriété au client ou au manipulateur. Toute supposition d'union, de transformation et/ou d'adhésion des produits sous la réserve de dominion aux produits de tiers subsistara la réserve de dominion dans la proportion correspondant à la valeur qui avait les produits objet de la réserve de dominion avant l'adhésion. Le client peut vendre la marchandise sous réserve de propriété dans le cours normal de ses affaires, à condition qu'il n'ait pas manqué à ses obligations de paiement envers BENEITO FAURE. En tout état de cause, en cas de revente de marchandises sous réserve de propriété, il y a cession de plein droit à BENEITO FAURE des crédits nés de cette revente en faveur du vendeur, ainsi que de tous autres crédits antérieurs, en cas d'indemnisation pour perte de la chose, responsabilité civile, etc. Dans ces cas, le client sera tenu de fournir à BENEITO FAURE toutes les informations et documents nécessaires à la réclamation des crédits subrogés. En cas de non-respect de la part du client, et notamment en cas de retard de paiement ou de déclaration de faillite du client, BENEITO FAURE se réserve le droit de réclamer, moyennant notification préalable au client, la possession des marchandises, le client étant tenu de les lui livrer. Si, avant le paiement intégral du prix, les marchandises vendues font l'objet d'une saisie ou d'un empêchement, le client est tenu de déclarer expressément, dans le cadre de la saisie, que les marchandises sont prioritaires pour BENEITO FAURE et si, malgré cette déclaration, elles sont saisies, BENEITO FAURE pourra exercer l'action correspondante du tiers, dont les frais seront à charge du client.

TEMPS DE LIVRAISON

Les périodes de disponibilité offertes par BENEITO FAURE sont toujours approximatives et peuvent faire l'objet de variations. Ces éventuelles variations de conditions n'impliquent pas l'acceptation de responsabilité ou de pénalités de retard de la part de BENEITO FAURE.

RÉCLAMATIONS

Le bon de livraison du transporteur doit mentionner toute anomalie visible et, après examen du matériel, communiquer par écrit à nos bureaux l'incident dans les 24 heures suivant la réception des marchandises. Passé ce délai, l'entreprise ne pourra pas prendre en charge la réclamation pour ne pas être dans le délai par l'agence de transport. Pour les autres types de réclamations, vous devez communiquer par écrit à nos bureaux. Le produit qui ne fonctionne pas correctement sera remplacé par un autre égal ou qui remplit les mêmes caractéristiques. En aucun cas nous ne prendrons en charge les coûts de main d'œuvre qui peuvent être occasionnés par le dysfonctionnement d'un produit de notre catalogue.

GARANTIE

BENEITO FAURE garantit que les produits vendus sont en parfait état. La garantie couvrira la réparation ou le remplacement du produit (à la discrétion de BENEITO FAURE) et il sera nécessaire d'envoyer l'incident par email. La garantie du produit se trouve sur l'emballage du produit. Le service technique de BENEITO FAURE sera le seul autorisé à déterminer s'il s'agit d'un défaut de fabrication, après avoir reçu par écrit l'incidence et la facture de vente pour vérification préalable. BENEITO FAURE base la période de garantie sur les années écoulées depuis l'achat du produit par le client, et non sur les heures d'utilisation du produit.

La GARANTIE ne sera pas couverte :

1. Si le produit a déjà été manipulé.
2. N'a pas été installé conformément aux instructions.
3. Si la ventilation n'est pas suffisante.
4. Problèmes de paiement partiel ou total par le client.

JURIDICTION

En cas de désaccord ou de litige, les deux parties se soumettront à la juridiction des juges et tribunaux de Barcelone.



CONDIZIONI GENERALI DI VENDITA

BENEITO FAURE S.L. si riserva il diritto di realizzare le variazioni che considera opportune sui propri prodotti non essendo responsabile di possibili informazioni errate che possono apparire nel catalogo.

LISTINO PREZZI

Per qualsiasi ordine si applicano le condizioni di vendita in vigore al momento della ricezione dello stesso. Il listino prezzi è inviato tramite mail a tutti i clienti inseriti nel data base di BENEITO FAURE e può essere aggiornato in qualsiasi momento se necessario. I prezzi sono da intendersi IVA esclusa. Tassa di riciclaggio inclusa.

ORDINI

Gli ordini devono essere inviati esclusivamente tramite mail. Non sarà processato nessun ordine via telefono o tramite altri mezzi. I preventivi del materiale che deve essere fatto su misura saranno inviati al cliente per accettazione e non saranno elaborati fino al ricevimento della copia firmata per accettazione.

RESI

Per procedere con qualsiasi reso è necessario ricevere l'autorizzazione di BENEITO FAURE. Il motivo del reso deve essere comunicato tramite e-mail indicando il nome del cliente, la data di acquisto, le unità ed il riferimento del prodotto da rendere. È obbligatorio allegare sempre la copia della fattura d'acquisto. L'accettazione del reso non implica l'accettazione definitiva dello stesso. Il reso sarà definitivo solo dopo la successiva verifica ed analisi del prodotto da parte del nostro ufficio tecnico. I resi di merce saranno accettati solo se in perfette condizioni per la vendita e nella confezione originale in buone condizioni. Anche l'etichetta dell'imballo deve essere integra. I resi non vengono rimborsati e devono essere spediti unicamente dal cliente all'azienda. I resi vengono compensati con articoli sostitutivi tramite autorizzazione di BENEITO FAURE. Non saranno accettati resi di prodotti fatti su misura o precedentemente trattati dall'ufficio tecnico su richiesta del cliente.

CONSEGNA

A meno che non si accordino speciali condizioni e termini, il trasporto è a carico del destinatario: EX-WORKS. Alternativamente BENEITO FAURE dispone di un servizio di consegna per ogni territorio e la resa ed il presso variano a seconda della destinazione. L'azienda non si fa carico di eventuali danni o alterazioni subiti dalla merce durante il trasporto non imputabili dall'azienda stessa.

DIRITTO DI PROPRIETÀ

BENEITO FAURE si riserva il diritto e la proprietà di tutto il materiale che somministra fino al momento in cui il cliente finale abbia totalmente pagato il materiale stesso.

La merce si somministra sotto la riserva di proprietà di BENEITO FAURE fino al totale adempimento delle obbligazioni da parte del cliente.

Il cliente è obbligato a cooperare e adottare tutte le misure necessarie o convenienti e quelle proposte da BENEITO FAURE per salvaguardare la sua proprietà del prodotto. La riserva di proprietà persiste anche quando viene accettato e riconosciuto il credito del cliente da BENEITO FAURE o se si fosse stabilito un sistema di pagamento tra le parti. Le trasformazioni o i miglioramenti della merce sulla quale BENEITO FAURE ha la riserva di proprietà, non assegnano la proprietà al cliente o al manipolatore. In caso di unione, trasformazione e/o adesione dei prodotti sotto la proprietà di terzi sussisterà la riserva di proprietà in proporzione al valore che avevano i prodotti oggetto di riserva di proprietà prima dell'adesione. Il cliente potrà vendere i beni soggetti a riserva di proprietà nell'ambito dei suoi affari, sempre e quando non ci siano violazioni delle obbligazioni nei confronti di BENEITO FAURE. In tutti i casi quando si genera una rivendita di merce soggetta a diritto di proprietà, si genera automaticamente la cessazione a BENEITO FAURE dei crediti conseguenti alla rivendita in favore del venditore, così come si qualsiasi altro credito precedente, nel suo caso di indennizzo per perdita della cosa, responsabilità extra-contrattuale, ecc. Il cliente sarà obbligato in questo caso a fornire a BENEITO FAURE tutte le informazioni e i documenti necessari per i reclami. BENEITO FAURE reclamerà, previa notifica del cliente in possesso della merce, essendo quest'ultimo obbligato a fornirli. Se prima di effettuare il pagamento totale, la merce venduta fosse soggetta a qualsiasi tipo di sequestro o blocco, il cliente sarà obbligato a dichiarare nel documento di sequestro che la merce è proprietà di BENEITO FAURE e se, indipendentemente da questo la merce fosse sequestrata, il cliente deve supportare BENEITO FAURE alla rivalsa del diritto di proprietà le cui spese saranno a carico del cliente.

TEMPI DI CONSEGNA

I tempi di consegna offerti da BENEITO FAURE sono sempre approssimati e possono essere soggetti a variazioni. Queste possibili variazioni non implicano l'accettazione di eventuali responsabilità o penalizzazioni subite a cause del ritardo di BENEITO FAURE.

RECLAMI

Nel documento di trasporto dell'autista deve essere segnalata qualsiasi visibile anomalia. Deve essere effettuato il controllo della merce e segnalato all'azienda entro e non oltre le 24 ore dalla ricezione. Superato questo tempo, l'azienda non si farà carico del reclamo per il ritardo dovuto all'agenzia di trasporto. Qualsiasi altro reclamo dovrà essere trasmesso in forma scritta all'azienda. Il prodotto non funzionante sarà sostituito con il corrispettivo uguale o che presenti le medesime caratteristiche. In nessun caso l'impresa si farà carico dei costi sostenuti per il mal funzionamento di un prodotto del nostro catalogo.

GARANZIA

Beneito Faure garantisce che i prodotti vengono venduti in perfetto stato. La garanzia copre la riparazione o la sostituzione del prodotto (sotto conferma di BENEITO FAURE) ed è necessario l'invio della contestazione via mail. La garanzia del prodotto si trova all'interno dell'imballo. Il dipartimento tecnico di BENEITO FAURE sarà l'unico autorizzato a determinare se si tratta di un difetto di fabbricazione, dopo aver ricevuto in forma scritta la contestazione e la fattura di vendita per poter verificare l'effettivo periodo di garanzia. BENEITO FAURE quantifica il tempo di garanzia considerando la data della fattura di acquisto del cliente e non sulle ore di funzionamento del prodotto.

La GARANZIA non sarà valida se:

1. Il prodotto viene manomesso o manipolato
2. Il prodotto non è installato come da istruzioni
3. La ventilazione del prodotto non è adeguata
4. Il cliente ha problemi con i pagamenti, sia in forma parziale che totale.

FORO DI COMPETENZA

In qualunque caso di discrepanza o controversia, ambe le parti si dovranno riferire al foro di competenza dei Giudici e del Tribunale di Barcellona.



ALLGEMEINE GESCHÄFTSBEDINGUNGEN

BENEITO FAURE S.L behält sich das Recht, etwaige, für erforderlich gehaltene Änderungen an den Produkten vorzunehmen, und ist nicht für mögliche Fehlinformationen im entsprechenden Katalog haftbar.

PREISLISTE

Alle Bestellungen unterliegen der zum Zeitpunkt der Bestellung geltenden Preisliste und den entsprechenden Geschäftsbedingungen. Die Preisliste wird per E-Mail an alle Kunden, die sich in der Datenbank von BENEITO FAURE befinden, geschickt und wird, wenn erforderlich, entsprechend aktualisiert werden. Die Preise enthalten weder die Mehrwertsteuer noch die Recyclinggebühr.

BESTELLUNGEN

Bestellungen müssen per E-Mail geschickt werden. Es werden keine Bestellungen telefonisch oder auf sonstigem Wege entgegengenommen. Der Kostenvoranschlag bzw. das Angebot für das nach Kundenvorgaben anzufertigende Produkt, wird dem Kunden zur Prüfung und zur Freigabe zugesandt und wird erst nach Erhalt der geprüften Auftragsfreigabe bearbeitet.

RÜCKGABEN

Alle Rückgaben müssen vorab bei BENEITO FAURE beantragt und von der Firma genehmigt werden. Die Rücksendung-Anfrage des Materials muss per E-Mail unter Angabe des Kundennamens, des Grundes der Rücksendung, des Kaufdatums, der Anzahl der Einheiten und der Referenz des zurückzusendenden Produkts erfolgen. Es ist zwingend erforderlich, eine Kopie der Kaufrechnung beizufügen. Die Annahme der Rücksendung bedeutet nicht die endgültige Annahme. Die Rücksendung ist erst nach der anschließenden Überprüfung und Analyse des Produkts durch unsere technische Abteilung endgültig. Warenrücksendungen werden nur akzeptiert, wenn sie sich in einwandfreiem Zustand zum Verkauf und in der Originalverpackung in gutem Zustand befinden. Das Verpackungsetikett muss ebenfalls intakt sein. Rückgaben werden nicht durch einen Geldbetrag ausgeglichen und müssen vom Kunden mit eigenen Transportmitteln geschickt werden. Die Materialrückgabe kann, nach Genehmigung von BENEITO FAURE, durch eine Vorbestellung ausgeglichen werden. Die Rücksendung der nach Maß gefertigten oder zuvor von der technischen Abteilung auf Kundenwunsch gefertigten Produkte wird nicht akzeptiert.

TRANSPORT

Außer im Falle von gesondert vereinbarten Transportbedingungen, wird die Ware unter ex-works Bedingungen zu Lasten des Käufers versendet werden. BENEITO FAURE wird die Lieferzeiten stets dem Empfangsort entsprechend angeben, wobei es sich immer um annähernde Zeiten handeln wird. Das Unternehmen ist nicht für etwaige Änderungen oder Verspätungen haftbar, die sich aus Gründen, die nicht vom Unternehmen zu verantworten sind, ergeben.

EIGENTUMSVORBEHALT

BENEITO FAURE behält sich das Eigentumsrecht auf alle gelieferten Materialien, bis der Käufer den gesamten Kaufbetrag beglichen hat.

Die bestellten Waren werden unter Eigentumsvorbehalt zu Gunsten von BENEITO geliefert, bis der Kunde allen abahlungsverpflichtungen nachgekommen ist. Der Kunde verpflichtet sich, zu kooperieren und alle notwendigen oder angemessenen Maßnahmen und solche Maßnahmen, die BENEITO vorschlägt oder benötigt, zu ergreifen, um sein Eigentum über die Ware zu schützen. Der Eigentumsvorbehalt besteht selbst dann weiter, wenn der Kunde akzeptierte und anerkannte Forderungen gegenüber BENEITO hätte, oder wenn ein System laufender Konten zwischen beiden Parteien bestünde. Die Transformation oder Verbesserung der Ware für die BENEITO einen Eigentumsvorbehalt hat, überträgt sein Eigentum nicht an den Kunden oder den Anwender. Im Falle von Zusammenführung, Transformation und/oder Beistellung von Produkten unter Eigentumsvorbehalt mit Produkten von Dritten besteht der Eigentumsvorbehalt in Proportion entsprechend dem Wert, den die Produkte mit Eigentumsvorbehalt vor der Beistellung hatten, fort. Der Kunde kann die Waren unter Eigentumsvorbehalt im Rahmen seiner gewöhnlichen Geschäfte verkaufen, solange er seinen Zahlungsverpflichtungen gegenüber BENEITO nachkommt. In jedem Fall erfolgt bei einem Wiederverkauf der Waren unter Eigentumsvorbehalt automatisch eine Abtretung der aus diesem Wiederverkauf entstehenden Forderungen zugunsten des Verkäufers an BENEITO, sowie eine Abtretung aller anderen Forderungen, die ggf. als Entschädigungen durch Warenverlust, außervertragliche Haftung usw. entstehen. Der Kunde ist in diesen Fällen dazu verpflichtet, BENEITO alle für die Reklamation der übertragenen Forderungen notwendigen Informationen und Unterlagen zur Verfügung zu stellen. Im Falle einer Nichteinhaltung seitens des Kunden, und insbesondere im Fall von verspäteten Zahlungen oder Konkurserklärung seitens des Kunden, reklamiert BENEITO als Eigentümer der Ware, nach vorheriger Mitteilung an den Kunden, die Zurückgabe der Ware seitens des Kunden. Sollte die verkaufte Ware vor der vollständigen Bezahlung des Preises Gegenstand von Pfändung oder Handelshemmnis werden, ist der Kunde verpflichtet, bei der Pfändungsmaßnahme ausdrücklich darauf hinzuweisen, dass die Waren Eigentum von BENEITO sind und, sollten sie trotz dieser Erklärung gepfändet werden, die Durchführung des entsprechenden Drittwiderspruchs, dessen Kosten zu Lasten des Kunden gehen, seitens BENEITO zu ermöglichen.

LIEFERZEIT

Die von BENEITO FAURE genannten Lieferzeiten und Verfügbarkeiten verstehen sich immer als ca. Angaben und können Änderungen unterliegen. Diese möglichen Änderungen der Lieferzeiten bedeuten nicht die Anerkennung der Verantwortung oder die Auferlegung einer Strafe als Folge des Verzugs durch BENEITO FAURE.

REKLAMATIONEN

Jegliche sichtbaren Mängel müssen auf dem Lieferschein des Transportunternehmens eingetragen werden. Nach Prüfung der Ware, müssen etwaige Vorfälle unserer Firma innerhalb der nächsten 24 Stunden schriftlich mitgeteilt werden. Nach dieser Frist übernimmt die Firma keine Haftung für Reklamationen, da die vom Transportunternehmen vorgeschriebene Frist abgelaufen ist. Im Falle sonstiger Reklamationen müssen diese unserer Verwaltung schriftlich mitgeteilt werden. Produkte, die nicht korrekt funktionieren, werden durch gleiche Produkte, oder Produkte mit den gleichen Eigenschaften, ersetzt. In keinem Fall werden wir die Arbeitskosten übernehmen, die sich aus der Fehlfunktion eines Produkts aus unserem Katalog ergeben könnten.

GARANTIE

BENEITO FAURE garantiert, dass die verkauften Produkte sich in perfektem Zustand befinden. Die Garantie deckt die Reparatur oder den Ersatz des Produkts (nach Entscheidung von BENEITO FAURE). Der Fall muss jedoch vorab per E-Mail angezeigt werden. Die Produktgarantie befindet sich in der Produktverpackung. Die technische Abteilung von BENEITO FAURE ist die einzige autorisierte Stelle, um die Entscheidung zu treffen, ob es sich um einen Herstellungsfehler handelt, nachdem der Fall schriftlich gemeldet wurde, samt Rechnung, zur entsprechenden Prüfung.

BENEITO FAURE bewertet die Garantiezeit unter Berücksichtigung des Datums der Kaufrechnung des Kunden und nicht anhand der Betriebsstunden des Produkts.

Die GARANTIE gilt nicht:

1. Wenn das Produkt manipuliert wurde.
2. Wenn das Produkt nicht gemäß Anleitungen installiert wurde.
3. Wenn die Produktbelüftung nicht geeignet ist.
4. Wenn Probleme für die teilweise oder vollständige Zahlung durch den Kunden vorliegen.

GERICHTSBARKEIT

Im Falle etwaiger Uneinigkeiten oder Streitfälle, werden sich beide Parteien der Gerichtsbarkeit der Richter und Gerichte von Barcelona unterwerfen.



CONDICIONES GENERALES DE VENTA

BENEITO FAURE S.L se reserva el derecho a realizar las variaciones que considere oportunas a sus productos no siendo responsables de la posible información errada que aparezca en dicho catálogo.

TARIFA

Para cualquier tipo de pedido se aplicará la tarifa y condiciones vigentes en el momento de la recepción del pedido. La tarifa se enviará vía email a todos los clientes que se encuentren en la base de datos de BENEITO FAURE y será actualizada siempre que sea necesario. Los precios no incluyen IVA ni tasa de reciclaje.

PEDIDOS

Los pedidos deberán ser enviados vía email. No se cursará ningún pedido por teléfono o cualquier otra vía. Los presupuestos de material que se deba manipular a medida se enviarán al cliente para su aceptación y no se cursaran hasta recibir la copia firmada de la aceptación.

DEVOLUCIONES

Para realizar cualquier devolución se deberá solicitar la autorización previa a BENEITO FAURE. Deberá comunicarse el motivo de la devolución vía email indicando el nombre del cliente, fecha de compra, unidades y referencia del producto devuelto, motivo de la devolución y albarán de compra. La aceptación de la devolución no implica la aceptación definitiva de ésta. Dicha devolución solo será definitiva tras la consiguiente verificación y análisis del producto por parte de nuestro departamento técnico. Solo serán aceptadas las devoluciones de mercancía si ésta se encuentra en perfecto estado para su venta y en su embalaje original en buen estado, así como la etiqueta de embalaje. Las devoluciones no serán compensadas mediante un importe económico. La devolución de material podrá ser compensada mediante un pedido previo y con la autorización de BENEITO FAURE. No se aceptarán devoluciones de productos de fabricación especial o previamente manipulados por parte del departamento técnico bajo petición del cliente.

TRANSPORTE

Salvo que se acuerden otros términos de transporte, la mercancía viajará por cuenta de los comprados con las condiciones EXWORKS. Así mismo, BENEITO FAURE ofrecerá un tiempo de entrega por cada territorio, siendo éste siempre aproximado. La empresa no se hará cargo de posibles alteraciones o demoras sobre éste tiempo producidas por causas externas a la empresa.

RESERVA DE LA PROPIEDAD

BENEITO FAURE se reserva el derecho a la propiedad de todos los materiales que suministre hasta que el comprador haya hecho efectivo el pago del total de los mismos.

Las mercancías pedidas se suministran bajo reserva de dominio en favor de BENEITO FAURE hasta el total cumplimiento de las obligaciones de pago del cliente.

El cliente queda obligado a cooperar y adoptar las medidas que sean necesarias y las que BENEITO FAURE le proponga para salvaguardar su propiedad sobre la mercancía. La reserva del dominio persiste incluso en el supuesto de que el cliente tuviera créditos aceptados y reconocidos contra BENEITO FAURE o se hubiera establecido un sistema de cuentas corrientes entre ambos. La transformación o mejora de la mercancía sobre la que BENEITO FAURE tiene reserva de dominio no otorga su propiedad al cliente o manipulador. En el supuesto de unión, transformación y/o accesión de los productos bajo la reserva de dominio a productos de terceros subsistirá la reserva de dominio en la proporción correspondiente al valor que tuvieran los productos objeto de reserva de dominio con anterioridad a la accesión. El cliente podrá vender los bienes sujetos a la reserva de dominio en el curso ordinario de sus negocios, siempre y cuando no haya incumplido sus obligaciones de pago frente a BENEITO FAURE. En todo caso al producirse una reventa de mercancías sujetas a reserva de dominio, se produce automáticamente la cesión a BENEITO FAURE de los créditos nacidos en consecuencia de dicha reventa en favor del vendedor, así como de cualesquiera otros créditos precedentes, en su caso de indemnizaciones por pérdida de la cosa, responsabilidad extracontractual, etc. El cliente estará obligado en estos supuestos a facilitar a BENEITO FAURE toda la información y documentación necesaria para la reclamación de los créditos subrogados. En caso de incumplimiento por parte del cliente, y en particular, en el supuesto de retraso en los pagos o en caso de declaración de concurso del cliente, BENEITO FAURE reclamará, previa notificación al cliente, en posesión de las mercancías, estando obligado éste a entregárselas. Si antes de efectuado el total pago del precio, las mercancías vendidas fuesen objeto de cualquier embargo o trabas, el cliente vendrá obligado a hacer constar expresamente en la diligencia del embargo, que las mercancías son prioridad de BENEITO FAURE y si, a pesar de esta manifestación, fuesen embargados, facilitará el ejercicio por parte de la BENEITO FAURE de la correspondiente acción de tercería de dominio, cuyos gastos correrán por parte del cliente.

PLAZO DE ENTREGA

Los plazos y disponibilidad ofrecidos por BENEITO FAURE son siempre aproximados y pueden estar sujetos a variaciones. Éstas posibles variaciones en los plazos no supondrán la aceptación de la responsabilidad o penalizaciones por la demora por parte de BENEITO FAURE.

RECLAMACIONES

En el albarán del transportista deberá constar cualquier anomalía visible y, tras haber revisado el material, comunicar por escrito a nuestras oficinas la incidencia en las 24 horas siguientes a la recepción de la mercancía.

Superado este tiempo, la empresa no podrá hacerse cargo de la reclamación por no estar en el plazo por la agencia de transporte.

Para otro tipo de reclamaciones, deberá comunicarse por escrito a nuestras oficinas.

El producto que no funcione correctamente será repuesto por otro igual o que cumpla con las mismas características. En ningún caso nos haremos cargo de los costes de la mano de obra que se pueda originar por el mal funcionamiento de un producto de nuestro catálogo.

GARANTÍA

BENEITO FAURE garantiza que los productos que se venden se encuentran en perfecto estado. La garantía cubrirá la reparación o la reposición del producto (bajo decisión de BENEITO FAURE) y será necesario el previo envío de la incidencia por email. La garantía del producto se encuentra en el embalaje del mismo. El departamento técnico de BENEITO FAURE será el único autorizado para determinar si se trata de un defecto de fabricación, después de recibir por escrito la incidencia y la factura de venta para previa verificación. BENEITO FAURE basa el tiempo de garantía en los años desde que el producto fue comprado por el cliente, no en las horas de funcionamiento de éste.

La GARANTÍA no se cubrirá:

1. Si el producto ha sido previamente manipulado.
2. No se encuentra instalado según las instrucciones.
3. Si la ventilación del cuál no es la adecuada.
4. Problemas de pago parcial o en su totalidad por parte del cliente.

JURISDICCIÓN

En cualquier discrepancia o disputa, ambas partes se someterán a la jurisdicción de los Jueces y tribunales de Barcelona.

Alphabetical Index (Name - Page)

Adapter 3PH	347	Bora 3PH suspension	354	Box 92	193
Adn G4	761	Bora 48V suspension	417	Box 95	195
Air recessed	489	Bora recessed	471	Box 98 railing	215
Alfa 3PH	383	Bora space	549	Box 99	201
Alp 3PH suspension	350	Bora surface	507	Caddie	665
Alp 48V	415	Bora suspension recessed	571	Cala 10W G24	765
Alp 48V suspension	415	Bora suspension surface	571	Cala 9W G24	765
Alp space	547	Bora XL 3PH suspension	354	Cam	697
Alp surface	509	Bora XL space	549	Cam XL	697
AR111 15° G53	740	Box 10	204	Casambi	328
AR111 15° GU10	740	Box 11	202	Casambi magnet track control	413
Argo recessed	453	Box 12	202	Ceiling fixing 3PH recessed	349
Argo XL recessed	453	Box 13	203	Ceiling fixing 3PH surface	347
Aria 30W E27 / E40	755	Box 14	198	Central corner connector 48V	411
Aria 50W E27 / E40	755	Box 15	189	Central corner connector mini	393
Ark 3PH suspension	351	Box 16	189	Circus in	149
Ark space	545	Box 17	190	Circus in XL	147
Ark suspension recessed	559	Box 18	190	Circus out	149
Ark suspension surface	559	Box 19	204	Circus out XL	147
Artis r wall	627	Box 21	216	Clos base	695
Artis sq wall	627	Box 22	212	Clos base mini	695
Asti	605	Box 23	191	Clos dual base	695
Aston 3PH	371	Box 24	207	Clos dual base mini	695
Atmos 3PH suspension	352	Box 27	217	Clos wall	639
Atmos GU10 3PH suspension	353	Box 28	223	Clos wall dual	639
Atmos GU10 suspension	565	Box 29	225	Color time	85
Atmos GU10 XL 3PH suspension	353	Box 30 12mm	227	Comet	649
Atmos GU10 XL suspension	565	Box 30 20mm	227	Compac r recessed	475
Atmos slim 48V IP	445	Box 32	211	Compac sq recessed	475
Atmos slim 48V mini	397	Box 33	213	Concord 48V mini	403
Atmos slim space	544	Box 34	186	Concord surface	513
Atmos slim suspension	561	Box 35	197	Converse	611
Atmos slim XL suspension	561	Box 37	205	Cookie 3PH	365
Atmos suspension	563	Box 38	197	Cookie 3PH suspension	359
Atmos XL 3PH suspension	352	Box 39	222	Cookie 48V	435
Atmos XL suspension	563	Box 41	187	Cookie 48V suspension	435
Atom recessed	455	Box 43	194	Cookie space	543
Avant r recessed	501	Box 53	191	Cookie suspension base	573
Avant r surface	535	Box 57	186	Crown 3PH	379
Avant sq recessed	501	Box 60	199	Crown base	527
Bag	607	Box 65	219	Cup 45W E27 / E40	759
Basculante recessed	493	Box 67	221	Curve / straight end cap 48V	411
Bathroom recessed	499	Box 68	211	Curve Line 48V	421
Beam wall	591	Box 69	209	Curve magnet track 48V surface	411
Bimba	609	Box 71	198	Curve Tram 48V	419
Bit 48V IP	447	Box 73	226	Custom system accessories	176
Blis r	653	Box 74	194	Dali	334
Blis rect	653	Box 75	195	Dau	131
Blis sq	653	Box 87	193	Dau E	131
Bonn recessed	491	Box 89	187	Diro 48V	423

Alphabetical Index (Name - Page)

Dis	623	Fine 48	235	Front base space	557
Dole GU10	741	Fine 49	263	Gam	707
Dot 48V	433	Fine 50	283	Globo 10W E27	748
Dual	93	Fine 51	259	Globo 10W E27 dimmable	748
Dual inserted track	93	Fine 52	247	Globo 15W E27	749
Dumi	41	Fine 54	279	Globo 16W E27	749
Dumi dual	43	Fine 55	264	Globo 22W E27	749
Dynamic control	323	Fine 56	256	Golf surface	505
Eclipse recessed	493	Fine 60	285	Golf XL surface	505
Egna	715	Fine 61	252	Grip	121
Emergency	179	Fine 63	273	Grow	583
End cap 3PH	347	Fine 64	234	Hat 3PH suspension	358
End cap 48V recessed	411	Fine 66 N	286	Hat 48V suspension	427
End cap 48V surface	411	Fine 68	250	Hat space	542
End cap IP	441	Fine 69	241	Hat suspension recessed	569
End cap mini surface /recessed	393	Fine 70	311	Hat suspension surface	569
Esférica 5,5W E14 / E27 dimm	744	Fine 71	287	Hook GU10	733
Esférica 5W E14 / E27	744	Fine 72	313	Hook GU10 dimmable	733
Esférica 7W E14 / E27	744	Fine 73	316	Horizon	167
Evo	45	Fine 74	315	HQI tubular E27	768
Evo dual	49	Fine 75	260	HQI tubular G12	768
Evo dual wall	49	Fine 76	253	HQI tubular RX7S	768
Evo E	52	Fine 77	309	Ice 48V IP	449
Evo E opal	53	Fine 79	251	Ice XL 48V IP	449
Evo fly	47	Fine 81	275	Icon wall	593
Evo mini	51	Fine 82	245	Ilo	581
Evo mini track	55	Fine 84	239	Ina	623
Evo R	51	Fine 86	267	Iris	717
Evo track	57	Fine 88	262	Kaa	163
Fade	665	Fine 90	268	Kaa line	165
Fijo recessed	493	Fine 91	269	Kom 3PH 20W	381
Filter	109	Fine 92	246	Kom 3PH 30W	381
Filter line	107	Fine 96	255	Kom 3PH 40W	381
Fine 20	242	Fine 97	237	Konic 3PH	371
Fine 25	305	Fine DMX-4	299	Kora r surface	529
Fine 25 circle 48V	437	Fine DMX-5	301	Kora sq surface	531
Fine 26	243	Fine running	291	Krion 300W	693
Fine 30	257	Fine SPI-2	293	Krion 400W	693
Fine 31	244	Fine SPI-3	295	Kubo	95
Fine 32 N	261	Fine SPI-4	296	Kubo E	95
Fine 34	307	Fine SPI-5	297	L joint 3PH recessed	349
Fine 36	274	Fix	675	L joint 3PH surface	347
Fine 37	265	Flama dimmable E14	743	L joint 48V ceiling recessed	411
Fine 41	249	Flama E14 / E27	743	L joint 48V ceiling surface	411
Fine 42	277	Flash	171	L joint ceiling IP	441
Fine 43	282	Flexible joint 3PH	347	L joint ceiling mini recessed	393
Fine 44	271	Forest	91	L joint ceiling mini surface	393
Fine 45	289	Frame 48V IP 1m	443	L joint wall 48V ceiling recessed	411
Fine 46	281	Frame 48V IP 2m	443	L joint wall 48V ceiling surface	411
Fine 47	288	Frame 48V IP 3m	443	L joint wall ceiling inner mini rece.	393

L joint wall ceiling inner mini surf.	393	Magnet track 48V recessed	411	Nano Golf surface	504
L joint wall ceiling IP	441	Magnet track 48V surface	411	Nano Line 48V	421
L joint wall ceiling outer mini rece.	393	Magnet track accessories	410	Nano Oxo r recessed	463
L joint wall ceiling outer mini surf.	393	Magnet track mini accessories	392	Nano Oxo sq recessed	463
Lao	579	Magnet track mini recessed	393	Nano Pulsar r / sq recessed	459
Led strip accessories	317	Magnet track mini surface	393	Nano Pulsar r / sq surface	459
Led strip control	336	Max BA15d	764	Nano Pulsar r / sq trim	459
Lek r wall	633	Micro globo 6W E27	748	Nano Sigma	663
Lek sensor	631	Micro Zoom recessed	457	Nano Tram 48V	419
Lek sq wall	633	Micro Zoom XL recessed	457	Nano Tram recessed	473
Lena 3PH	377	Mini Bora 48V	417	Narrow GU10 dimmable	735
Lievo 3PH suspension	355	Mini Bora recessed	471	Neo	641
Lievo space	551	Mini Bora surface	507	Neo sensor	643
Lievo XL 3PH suspension	355	Mini Comet	649	Neo XL	641
Lievo XL space	551	Mini Concord 48V mini	403	Neo XL sensor	643
Lift	169	Mini Concord surface	513	Nexus	84
Lift wall	169	Mini Golf surface	504	Nik	669
Line 48V	421	Mini Hat 3PH suspension	358	Nitro GU10	741
Line 48V mini	405	Mini Hat 48V suspension	427	Nix	623
Lineal 13W R7S	767	Mini Hat space	542	Noa 80W E27 / E40	760
Lineal 9W R7S	767	Mini Hat suspension recessed	569	Noa 85W E27 / E40	760
Lineal tubular 11W R7S dimmable	767	Mini Hat suspension surface	569	Noi dimm recessed	483
Lineal tubular 5W R7S	766	Mini Icon wall	593	Noi recessed	483
Lineal tubular 9W R7S	766	Mini Kora r surface	529	Nox surface	533
Lineal tubular 9W R7S dimmable	766	Mini Kora sq surface	531	Nyneto	123
Linear joint 3PH with spacing rece.	349	Mini Line 48V	421	Obo 19W E27	756
Linear joint 3PH with spacing surf.	347	Mini Line 48V mini	405	Obo 27W E27	756
Linear joint 3PH without spacing	347	Mini Mac wall	645	Obo 36W E27 / E40	757
Linear joint 48V recessed	411	Mini Oxo r recessed	465	Obo 45W E27 / E40	757
Linear joint 48V surface	411	Mini Oxo rect 2 recessed	467	Oculum 3PH	367
Linear joint IP	441	Mini Oxo rect 4 recessed	467	Oma	637
Linear Joint IP68	703	Mini Oxo rect 6 recessed	467	One GU10 wall	599
Linear joint mini	393	Mini Oxo sq recessed	465	One GU10 wall dual	599
Linstra	103	Mini Piccolo 48V mini	395	One recessed	495
Lonja 3PH	373	Mini Pla	659	One surface	535
Lonja XL 3PH	375	Mini Rubyc surface	515	Optic	661
Luk r recessed	497	Mini Sigma	663	Outdoor track accessories	441
Luk r recessed IP	497	Mini Thessis dimm recessed	487	Outdoor track IP	441
Luk sq recessed IP	497	Mini Thessis recessed	485	Oxo r dimm recessed	469
Luky	621	Mini Tram 3PH	385	Oxo sq dimm recessed	469
Luxor	105	Mini Tram 48V	419	Par 30 E27	753
Lynk G53	739	Mini Tram recessed	473	Par 38 3.000K E27	753
Lynk GU10	739	Minimus	125	Par 38 Green E27	753
Lynk GU10 dimmable	739	Mirror	99	Pendant lamp accessories	177
Mac floor	699	Mis r wall	625	Piccolo 3PH	361
Mac floor XL	699	Mis sq wall	625	Piccolo 48V mini	395
Mac wall	645	Motion sensor	343	Piccolo AR111 3PH	363
Mac wall base	647	Nano Alp 3PH suspension	350	Piccolo AR111 surface	525
Mac wall XL	645	Nano Alp space	547	Piccolo base	523
Madi	613	Nano Argo flat recessed	453	Piccolo GU10 3PH	363

Alphabetical Index (Name - Page)

Piccolo GU10 surface	525	Shop E14	742	Steps	583
Pl T40 E27	752	Side base space	555	Sunset r	655
Pla	659	Sigma	663	Sunset sq	655
Pla XL	659	Sigma XL	663	Sunset XL	657
Plus surface	511	Signal	671	Sunset XL dual	657
Polaris 100W	691	Sil E27	754	Surface base 3PH	347
Polaris 150W	691	Skin	581	Suspension kit 3PH	347
Polaris 200W	691	Sky 100W	689	Suspension kit 48V	411
Polo	621	Sky 10W	688	Suspension kit mini	393
Popa	711	Sky 10W 4CCT	684	Sweet usb-a	589
Popa XL	711	Sky 10W sensor	687	Sweet wall	589
Port	583	Sky 10W spike	679	System GU10	736
Power GU10	738	Sky 10W switch	680	System GU10 dimmable	736
Power GU10 dimmable	738	Sky 150W	689	System MR16	736
Power MR16	738	Sky 200W	689	T joint 3PH recessed	349
Power supplies 24V	340	Sky 20W	688	T joint 3PH surface	347
Power supply 3PH recessed	349	Sky 20W 4CCT	684	T joint ceiling mini recessed	393
Power supply 3PH surface	347	Sky 20W switch	680	T joint ceiling mini surface	393
Prisma E14	742	Sky 30W	688	T Joint IP68	703
Proa	713	Sky 30W 4CCT	685	Tao recessed	481
Pulcom asymm trim	479	Sky 30W sensor	687	Tax	101
Pulcom led accessory	479	Sky 30W switch	681	Thesis dimm recessed	487
Pulcom r recessed	477	Sky 40W 4CCT	685	Thesis recessed	485
Pulcom r recessed asymm	477	Sky 40W switch	681	Thesis SL recessed	485
Pulcom r surface	479	Sky 50W sensor	687	Three phase track recessed	349
Pulcom sq recessed	477	Sky solar sensor	721	Three phase track recessed acc.	348
Pulcom sq recessed asymm	477	Smile 20W E27	758	Three phase track surface	347
Pulcom trim	479	Smile 40W E27	758	Three phase track surface acc.	346
Pulsar dimm recessed	461	Smile 60W E40	758	Time	83
Pulsar surface accessory	461	Sono 3PH	387	Time E	83
Pulsar trim	461	Sono SL 3PH	387	Time track	89
Pun	585	Sphere 3PH suspension	360	Time wall sensor	87
Pure wall	587	Sphere 48V	429	Tot suspension / surface	575
Puzzle	97	Sphere 48V mini	401	Tot XL suspension / surface	575
PVC trim 48V	411	Sphere 48V mini suspension	401	Tram 3PH	385
Quick	129	Sphere 48V suspension	429	Tram 48V mini	405
R-39 E14	750	Sphere alp wall	597	Tram recessed	473
R-50 E14	750	Sphere space	541	Tram XL recessed	473
R-63 E27	750	Sphere wall	635	Triton	173
R-63 s-line GU10	737	Square	133	Triton down	175
R-80 E27	751	Standard 10W E27 dimmable	747	Tron	595
R-90 2.200K E27	751	Standard 12W E27	746	Tubi	115
R-90 3.000K E27	751	Standard 12W E27 dimmable	747	Tubi mini	113
Recessed base 3PH	349	Standard 15W E27	746	Tubi wall	119
RF control	326	Standard 17W E27 dimmable	747	Tubi wall mini	117
Rok recessed	499	Standard 6W E27	745	Tundra	151
Rubyc surface	515	Standard 9W E27	745	Tura	701
Sair	673	Start connector 48V	411	Tura XL	701
Sair XL	673	Start connector mini	393	Tutto GU10	732
Selen	651	Stem	617	Tutto MR11	732

Tuya	327	Wech	677
Tween recessed	629	X joint 3PH recessed	349
Tween surface	629	X joint 3PH surface	347
Twist	709	X joint ceiling mini recessed	393
Ufo Lens Dali 100W	726	X joint ceiling mini surface	393
Ufo Lens Dali 150W	726	X Joint IP68	703
Ufo Lens Dali 200W	727	Zas r	667
Ufo Lens Dali 240W	727	Zas sq	667
Ufo Lens switch 120W/160W/200W	725	Zero D	136
Ufo Lens switch 140W/190W/240W	725	Zero design	156
Ufo Lens switch 60W/80W/100W	724	Zero design accessories	178
Ufo Lens switch 90W/120W/150W	724	Zero direct	155
Uniform-line G4	762	Zero direct XL	153
Uniform-line G9	763	Zero in	143
Uniform-line GU10	734	Zero in XL	139
Uniform-line GU10 dimmable	734	Zero out	145
Uniform-line long G4	762	Zero out XL	141
Uniform-line long G9	763	Zero Q	135
Uniform-line MR16	734	Zero T	137
Urban	60	Zero up & down	161
Urban 3PH	81	Zibor	651
Urban asymmetric	73	Zio GU10 wall	601
Urban asymmetric E	73	Zio GU10 wall dual	601
Urban closed	81	Zio recessed	495
Urban E	65	Zio surface	535
Urban emergency	61	Zoe 3PH suspension	357
Urban fly	69	Zoe 48V mini	399
Urban fly E	69	Zoe 48V mini suspension	399
Urban market	79	Zoe 48V suspension	425
Urban sensor casambi	61	Zoe space	553
Urban track	77	Zoe suspension recessed	567
Urban train	67	Zoe suspension surface	567
Urban train E	67	Zoe XL 3PH suspension	357
Urban wall sensor	75	Zoe XL space	553
Urban work	71	Zoom 3PH	369
Urban work E	71		
Vision	127		
Visor	615		
Visor solar	719		
Volt r 48V	431		
Volt r base	517		
Volt r GU10 base	520		
Volt r3 GU10 surface	521		
Volt r3 surface	519		
Volt sq 48V	431		
Volt sq base	517		
Volt sq GU10 base	520		
Volt sq3 GU10 surface	521		
Volt sq3 surface	519		
Waterproof silicone cover IP	443		

Numerical Index (Code - Page)

332	317	3518	749	3881	748	3995	621	4248	744	4401	688
334	317	3519	749	3882	711	3996	621	4249	744	4402	688
335	317	3520	749	3883	711	3997	621	4250	744	4410	459
336	317	3521	749	3884	711	3998	621	4251	663	4411	459
1119	202	3522	749	3885	711	3999	621	4254	688	4412	459
3364	347	3523	749	3897	349	4000	621	4266	688	4413	459
3365	347	3524	748	3898	349	4001	621	4279	688	4427	385
3366	347	3525	748	3900	760	4002	621	4280	688	4428	385
3367	347	3526	748	3901	760	4003	737	4290	671	4429	385
3368	347	3527	747	3902	760	4023	733	4291	669	4430	385
3369	347	3528	747	3903	760	4024	733	4292	669	4433	525
3370	347	3529	747	3904	767	4025	733	4295	738	4435	363
3372	347	3530	747	3905	767	4038	383	4296	738	4444	381
3372	349	3531	713	3906	767	4039	383	4297	459	4445	381
3373	347	3532	713	3909	756	4040	383	4298	459	4447	381
3438	738	3534	743	3910	756	4049	525	4299	459	4448	381
3441	738	3569	764	3911	757	4050	525	4300	459	4451	459
3442	738	3570	768	3912	757	4096	491	4301	459	4452	459
3443	738	3571	768	3913	758	4097	491	4302	459	4453	459
3444	732	3579	753	3914	758	4098	491	4303	633	4454	459
3445	732	3580	665	3915	758	4099	491	4304	633	4455	459
3446	732	3581	665	3917	756	4106	583	4308	687	4456	459
3447	732	3587	715	3918	756	4107	583	4309	687	4465	565
3448	732	3592	715	3919	757	4108	581	4310	687	4466	565
3449	732	3614	347	3920	757	4109	581	4311	687	4467	565
3450	742	3615	347	3921	757	4110	583	4312	633	4468	565
3452	739	3616	347	3922	757	4111	583	4331	661	4476	495
3453	739	3617	347	3923	757	4112	583	4340	679	4477	495
3454	739	3618	347	3924	757	4113	583	4341	679	4478	495
3455	739	3618	349	3925	758	4126	581	4349	687	4479	495
3456	739	3619	347	3926	758	4127	581	4350	687	4480	535
3457	739	3620	347	3927	758	4134	667	4351	687	4481	535
3458	347	3621	347	3929	615	4135	663	4352	687	4482	535
3459	347	3622	347	3931	615	4137	751	4353	687	4483	535
3464	739	3623	347	3948	475	4175	589	4354	687	4484	501
3465	739	3625	347	3949	475	4176	383	4355	687	4485	501
3466	739	3795	347	3950	475	4177	383	4356	687	4486	501
3467	741	3796	347	3951	475	4178	383	4362	347	4487	501
3468	741	3797	347	3952	475	4193	719	4363	347	4509	693
3469	741	3805	349	3953	475	4194	719	4364	347	4510	693
3470	741	3851	349	3955	689	4209	719	4365	347	4511	693
3477	767	3852	349	3956	689	4227	734	4367	623	4512	693
3478	767	3854	755	3957	689	4228	734	4368	623	4522	511
3485	483	3855	755	3965	760	4229	734	4369	623	4523	511
3486	483	3856	755	3983	633	4236	485	4383	593	4541	385
3489	738	3857	755	3984	633	4243	744	4384	593	4542	385
3490	738	3858	755	3985	633	4244	744	4385	593	4543	385
3491	738	3859	755	3986	633	4245	744	4386	593	4544	385
3496	717	3860	755	3987	633	4246	744	4387	593	4549	463
3497	717	3861	755	3988	633	4247	744	4388	593	4550	463

4551	463	4619	571	4677	749	4759	497	4812	559	4879	639
4552	463	4620	571	4678	749	4761	479	4813	559	4880	639
4566	724	4621	507	4679	680	4762	479	4814	559	4881	639
4567	725	4622	507	4680	680	4763	479	4815	559	4882	695
4573	417	4623	507	4681	680	4764	479	4816	559	4883	695
4574	417	4624	507	4682	680	4766	485	4817	559	4884	695
4575	417	4625	507	4683	680	4767	487	4818	559	4885	695
4576	417	4626	507	4684	680	4768	433	4819	559	4886	695
4577	417	4627	507	4685	681	4769	433	4820	675	4887	695
4578	417	4628	507	4686	681	4770	433	4821	479	4888	695
4579	417	4629	507	4687	681	4771	433	4822	479	4889	695
4580	417	4630	507	4688	681	4772	435	4823	479	4890	695
4581	417	4631	507	4689	681	4773	435	4824	479	4891	695
4582	417	4632	507	4690	667	4774	435	4825	479	4892	695
4583	417	4633	507	4691	487	4776	419	4826	479	4893	695
4584	417	4634	507	4692	667	4777	419	4827	651	4894	673
4585	417	4635	507	4693	667	4778	419	4828	651	4895	673
4586	417	4636	507	4694	681	4779	419	4829	651	4896	673
4587	417	4637	411	4700	347	4780	419	4830	651	4897	673
4588	417	4638	411	4701	347	4781	419	4831	531	4898	673
4589	471	4639	411	4707	410	4782	419	4832	529	4899	673
4590	471	4640	411	4707	441	4782	419	4835	525	4900	369
4591	471	4641	411	4708	410	4784	421	4836	525	4901	369
4592	471	4642	411	4708	441	4785	421	4837	699	4903	575
4593	471	4643	411	4711	410	4786	421	4838	699	4905	575
4594	471	4644	411	4711	441	4787	415	4839	699	4906	633
4595	471	4647	411	4725	392	4788	415	4840	699	4907	633
4596	471	4648	411	4726	392	4789	415	4841	699	4908	633
4597	471	4649	411	4727	392	4790	415	4842	699	4909	633
4598	471	4650	411	4731	473	4791	415	4843	699	4910	633
4599	471	4651	411	4735	473	4792	415	4844	699	4911	633
4600	471	4652	411	4737	473	4793	415	4845	699	4912	633
4601	471	4653	411	4738	473	4794	415	4846	699	4913	633
4602	471	4654	411	4742	477	4795	425	4847	699	4914	633
4603	471	4655	411	4743	477	4796	425	4848	699	4915	726
4604	471	4659	411	4744	477	4797	425	4849	701	4916	726
4605	571	4660	411	4745	477	4798	425	4850	701	4917	726
4606	571	4661	411	4746	477	4799	567	4851	701	4918	726
4607	571	4662	411	4747	477	4800	567	4852	701	4919	727
4608	571	4663	411	4748	477	4801	567	4853	701	4920	727
4609	571	4664	411	4749	477	4802	567	4854	701	4921	727
4610	571	4665	411	4750	561	4803	567	4855	701	4922	667
4611	571	4666	411	4751	561	4804	567	4856	701	4923	665
4612	571	4667	651	4752	561	4805	567	4857	701	4924	665
4613	571	4668	651	4753	349	4806	567	4858	701	4930	561
4614	571	4669	651	4754	349	4807	411	4859	701	4931	561
4615	571	4670	651	4755	499	4808	559	4860	701	4932	561
4616	571	4671	735	4756	499	4809	559	4876	639	4933	535
4617	571	4672	735	4757	499	4810	559	4877	639	4934	535
4618	571	4675	673	4758	497	4811	559	4878	639	4935	479

Numerical Index (Code - Page)

4946	387	5003	645	5057	461	5120	549	5210	459	5267	455
4947	387	5004	677	5058	461	5121	549	5211	459	5268	455
4950	387	5005	677	5059	461	5122	549	5212	461	5269	455
4951	387	5006	599	5060	461	5123	549	5213	461	5270	455
4954	565	5007	599	5061	465	5124	549	5214	497	5271	455
4955	565	5008	599	5062	465	5125	549	5215	497	5272	455
4956	387	5009	599	5063	467	5128	555	5216	497	5273	457
4957	653	5010	599	5064	467	5129	555	5217	497	5274	457
4958	653	5011	599	5065	467	5139	410	5218	645	5275	457
4959	653	5012	601	5066	467	5140	410	5219	645	5276	457
4960	653	5013	601	5067	467	5147	724	5220	645	5277	457
4961	653	5014	601	5068	467	5148	724	5221	379	5278	457
4962	653	5015	601	5069	515	5149	725	5222	379	5279	457
4963	349	5016	601	5070	515	5150	725	5224	527	5280	457
4964	349	5017	601	5071	513	5154	613	5225	527	5281	457
4965	349	5018	489	5072	513	5155	589	5226	645	5282	457
4966	349	5019	483	5073	649	5156	589	5227	645	5283	457
4967	349	5020	625	5074	649	5157	591	5228	645	5284	457
4968	349	5021	625	5075	649	5158	591	5229	645	5285	504
4969	349	5022	625	5076	649	5159	587	5230	645	5286	504
4970	349	5023	625	5084	549	5160	587	5231	645	5287	504
4971	349	5024	625	5085	549	5178	707	5232	645	5288	504
4972	349	5025	625	5086	549	5179	365	5233	645	5289	504
4973	349	5027	579	5087	549	5180	365	5234	645	5290	504
4974	349	5028	627	5088	551	5181	435	5235	645	5291	504
4975	349	5029	585	5089	551	5182	435	5236	645	5292	504
4976	349	5030	485	5090	551	5183	573	5237	645	5293	504
4977	349	5034	479	5091	551	5184	573	5238	423	5294	504
4978	349	5035	479	5092	553	5185	435	5239	423	5295	504
4979	617	5036	479	5093	553	5186	435	5246	453	5296	504
4981	617	5037	431	5094	553	5187	740	5247	453	5297	505
4982	653	5038	431	5095	553	5188	740	5248	453	5298	505
4983	653	5039	431	5096	547	5189	740	5249	453	5299	505
4984	653	5040	431	5097	547	5190	740	5250	453	5300	505
4987	485	5041	517	5098	547	5191	740	5251	453	5301	505
4988	485	5042	517	5099	547	5192	740	5252	453	5302	505
4989	655	5043	517	5106	555	5196	629	5253	453	5303	505
4990	655	5044	517	5107	555	5197	629	5254	453	5304	505
4991	655	5045	519	5108	465	5198	629	5255	453	5305	505
4992	655	5046	519	5109	465	5199	629	5256	453	5306	505
4993	655	5047	519	5110	461	5200	629	5257	453	5307	505
4994	655	5048	519	5111	461	5201	629	5258	453	5308	505
4995	645	5049	520	5112	649	5202	421	5259	453	5309	419
4996	645	5050	520	5113	649	5203	421	5260	453	5310	419
4997	645	5051	520	5114	547	5204	421	5261	453	5311	419
4998	645	5052	520	5115	547	5205	627	5262	453	5312	419
4999	645	5053	521	5116	547	5206	461	5263	453	5313	421
5000	645	5054	521	5117	547	5207	461	5264	647	5314	421
5001	645	5055	521	5118	549	5208	459	5265	647	5315	421
5002	645	5056	521	5119	549	5209	459	5266	647	5316	421

5317	411	5389	449	5567	643	5617	405	5671	703	6025	410
5319	411	5390	449	5568	697	5618	405	5672	703	6721	413
5325	609	5391	449	5569	697	5619	405	5673	703	6722	413
5326	609	5392	445	5570	697	5620	405	5674	673	7001	545
5327	609	5393	445	5571	697	5621	405	5676	673	7002	545
5328	609	5394	445	5572	721	5622	405	5677	673	7003	545
5329	607	5395	445	5573	721	5623	405	5678	665	7004	545
5330	607	5396	447	5574	487	5624	405	5679	665	7005	545
5331	607	5397	447	5575	487	5625	405	5680	665	7006	545
5332	607	5398	447	5576	663	5626	405	5681	665	7007	543
5333	635	5399	447	5577	663	5627	405	5682	667	7008	543
5334	635	5400	443	5578	393	5628	395	5683	667	7009	542
5336	635	5401	443	5579	393	5629	395	5684	659	7010	542
5337	635	5402	443	5580	393	5630	395	5685	659	7011	542
5339	597	5403	443	5581	393	5631	395	5686	659	7012	542
5340	597	5404	443	5582	393	5632	395	5687	659	7013	542
5342	597	5405	443	5583	393	5633	395	5688	659	7014	542
5343	597	5406	441	5584	393	5634	395	5689	659	7015	542
5345	569	5407	441	5585	393	5635	395	5690	659	7016	542
5346	569	5408	441	5586	393	5636	397	5691	659	7017	541
5348	569	5409	441	5587	393	5637	397	5692	659	7018	541
5349	569	5410	441	5588	393	5638	397	5693	667	7019	541
5351	569	5411	441	5589	393	5639	397	5694	667	7020	541
5352	569	5412	441	5590	393	5640	399	5698	691	7021	544
5354	569	5413	441	5591	393	5641	399	5699	691	7022	544
5355	569	5414	441	5592	393	5642	399	5700	691	7023	544
5357	509	5415	441	5593	393	5643	399	5701	709	7024	544
5358	509	5416	441	5594	393	5644	399	5702	691	10119	204
5360	509	5417	441	5595	393	5645	399	5703	691	10121	204
5361	509	5419	657	5596	393	5646	399	5704	691	10122	204
5363	427	5420	657	5597	393	5647	399	5706	569	10621	204
5364	427	5421	657	5598	393	5648	403	5707	569	10622	204
5366	427	5422	657	5599	393	5649	403	5708	569	10623	204
5367	427	5423	657	5600	393	5650	403	5709	569	11623	202
5369	429	5424	657	5601	393	5651	403	5710	569	11633	202
5370	429	5425	441	5602	393	5652	403	5711	569	12119	202
5372	429	5426	441	5603	393	5653	403	5712	569	12623	202
5373	429	5431	437	5604	393	5654	403	5713	569	12633	202
5375	429	5432	437	5605	393	5655	403	5714	427	13113	203
5376	429	5441	437	5606	393	5656	401	5715	427	13330	203
5378	429	5442	437	5607	393	5657	401	5716	427	13480	203
5379	429	5558	410	5608	393	5658	401	5717	427	13623	203
5381	637	5559	410	5609	393	5659	401	5718	481	13633	203
5382	637	5560	641	5610	393	5660	401	5719	481	14119	198
5383	637	5561	641	5611	393	5661	401	5729	684	14121	198
5384	449	5562	643	5612	393	5662	401	5730	684	14122	198
5385	449	5563	643	5613	393	5663	401	5731	685	14330	198
5386	449	5564	641	5614	393	5666	631	5732	685	14480	198
5387	449	5565	641	5615	393	5667	631	5733	605	14621	198
5388	449	5566	643	5616	405	5668	631	6023	410	14622	198

Numerical Index (Code - Page)

14623	198	19621	204	20510	197	22119	212	24408	341	29276	334
14631	198	19622	204	20510	204	22122	212	24440	207	29480	225
14632	198	19623	204	20518	317	22330	212	24508	341	29623	225
14633	198	20049	319	20520	197	22410	340	24609	341	29735	335
15119	189	20066	319	20520	204	22415	340	24621	207	29777	334
15121	189	20120	318	20528	317	22420	340	24622	207	29882	334
15122	189	20125	318	20530	197	22424	340	24623	207	30129	227
15621	189	20130	318	20530	204	22430	340	24631	207	30209	227
15622	189	20135	319	20540	197	22432	340	24632	207	30270	257
15623	189	20140	319	20540	204	22435	340	24633	207	30300	257
15631	189	20145	319	20625	318	22460	340	24710	195	30400	257
15632	189	20150	319	20625	319	22490	335	24710	207	31220	244
15633	189	20220	318	20625	319	22499	335	24758	341	31225	244
16119	189	20225	318	20635	318	22570	327	25227	305	31227	244
16121	189	20230	318	20635	319	22571	327	25247	305	31270	244
16122	189	20235	319	20635	319	22571	392	25267	305	31275	244
16621	189	20240	319	20700	197	22573	327	25277	305	31277	244
16622	189	20245	319	20710	197	22575	327	25307	305	31300	244
16623	189	20249	319	20710	204	22622	212	25367	305	31305	244
16631	189	20250	319	20718	317	22623	212	25407	305	31307	244
16632	189	20266	319	20720	195	22699	327	25450	305	31400	244
16633	189	20274	242	20720	197	22699	392	25467	305	31405	244
17119	190	20304	242	20720	204	22726	337	25530	222	31407	244
17121	190	20330	189	20728	317	22799	337	25530	305	31709	318
17122	190	20330	190	20730	202	22821	327	25637	305	31809	318
17621	190	20350	189	20738	317	22856	327	25657	305	31909	318
17622	190	20350	190	20750	197	22911	335	25667	305	32131	211
17623	190	20380	189	20772	197	22948	334	25887	222	32299	318
17631	190	20380	190	20811	367	22974	335	25887	305	32440	211
17632	190	20382	189	20818	317	23119	191	25997	305	32499	318
17633	190	20382	190	20825	317	23121	191	26270	243	32621	211
18119	190	20404	242	20828	317	23122	191	26300	243	32625	318
18121	190	20430	190	20833	367	23380	191	26400	243	32625	318
18122	190	20440	189	20838	317	23480	191	27119	217	32631	211
18621	190	20440	190	20855	367	23621	191	27121	217	32635	318
18622	190	20450	189	20865	317	23622	191	27122	217	32635	318
18623	190	20450	190	20877	367	23623	191	27621	217	32699	318
18631	190	20469	189	20915	319	23631	191	27622	217	32899	318
18632	190	20469	190	20917	319	23632	191	27623	217	32900	318
18633	190	20469	212	20925	319	23633	191	27631	217	33119	213
18651	190	20469	213	20927	319	24108	341	27632	217	33121	213
18652	190	20469	216	20991	318	24109	341	27633	217	33122	213
18653	190	20472	189	20997	204	24119	207	28119	223	33440	213
18661	190	20472	190	20999	318	24121	207	28330	223	33621	213
18662	190	20480	202	21119	216	24122	207	28430	223	33622	213
18663	190	20480	202	21121	216	24159	341	28623	223	33623	213
19119	204	20490	204	21621	216	24208	341	28633	223	34121	186
19121	204	20497	212	21623	216	24248	341	29119	225	34277	307
19122	204	20497	216	21631	216	24308	341	29187	334	34307	307
19330	204	20502	204	21633	216	24309	341	29261	335	34407	307

34621	186	35762	197	40581	176	40991	176	47430	288	56400	256
34622	186	36330	274	40582	176	40992	176	47437	288	57001	331
34623	186	37121	205	40583	176	40993	176	47440	288	57121	186
34627	307	37270	265	40591	176	40999	176	47447	288	57241	329
34637	307	37300	265	40592	176	41121	187	48220	235	57242	329
34720	97	37400	265	40593	176	41122	187	48225	235	57299	329
34720	176	37480	205	40610	176	41270	249	48270	235	57400	331
34720	186	37621	205	40631	176	41275	249	48275	235	57452	331
34720	186	38119	197	40632	176	41300	249	48300	235	57461	331
34720	187	38121	197	40634	176	41305	249	48305	235	57588	330
34721	97	38122	197	40635	176	41330	187	48400	235	57621	186
34721	176	38621	197	40666	176	41400	249	48405	235	57622	186
34721	186	38622	197	40669	176	41405	249	49270	263	57623	186
34721	186	38623	197	40721	176	41440	187	49300	263	57661	329
34721	187	39122	222	40722	176	41450	187	49400	263	57662	331
34722	97	39430	222	40723	176	41472	187	49600	263	57666	331
34722	176	39440	222	40731	176	41600	249	50460	283	57881	331
34722	186	39450	222	40732	176	41605	249	51270	259	57882	331
34722	186	39622	222	40733	176	41621	187	51277	259	57924	330
34722	187	39720	222	40741	176	41622	187	51300	259	59016	332
35119	197	40111	373	40742	176	41780	187	51307	259	59020	333
35121	197	40171	177	40743	176	41781	187	51400	259	59032	332
35122	197	40172	177	40751	176	41782	187	51407	259	59050	333
35311	178	40173	177	40752	176	42360	277	51600	259	59064	332
35311	197	40191	177	40753	176	42365	277	51607	259	59112	329
35312	197	40192	177	40770	176	43119	194	52270	247	59121	329
35330	197	40193	177	40780	176	43121	194	52277	247	59122	329
35331	178	40201	177	40790	176	43122	194	52300	247	59141	329
35331	197	40202	177	40795	176	43330	194	52307	247	59142	329
35332	197	40209	177	40807	339	43430	282	52400	247	59182	328
35351	178	40220	176	40810	176	43440	194	52407	247	59189	328
35351	197	40339	176	40831	176	43530	194	52600	247	59216	332
35352	197	40410	176	40832	176	43621	194	52607	247	59232	332
35361	178	40420	176	40833	176	43622	194	53119	191	59249	330
35361	197	40430	176	40851	176	43623	194	53121	191	59264	332
35362	197	40481	176	40851	176	43631	194	53122	191	59289	331
35621	197	40482	176	40852	176	43632	194	53621	191	59475	329
35622	197	40483	176	40852	176	43633	194	53622	191	59519	330
35623	197	40490	176	40853	176	44110	271	53623	191	59549	330
35711	178	40491	176	40853	176	44270	271	53631	191	59629	330
35711	197	40492	176	40881	176	44370	271	53632	191	59682	328
35712	197	40510	175	40882	176	44500	271	53633	191	59689	328
35731	178	40520	175	40883	176	45220	289	54460	279	59733	330
35731	197	40531	175	40901	177	45227	289	54467	279	59739	330
35732	197	40532	175	40902	177	45310	289	55270	264	59769	330
35751	178	40541	176	40909	177	45317	289	55300	264	59777	330
35751	197	40542	176	40931	176	45520	289	55400	264	59789	330
35752	197	40543	176	40932	176	45527	289	56270	256	59808	329
35761	178	40550	176	40933	176	46460	281	56300	256	59847	329
35761	197	40555	186	40990	176	46465	281	56360	256	59911	333

Numerical Index (Code - Page)

60119	199	65621	219	71477	287	75405	260	84300	239	85894	337
60121	199	65622	219	71621	198	75440	195	84305	239	85894	392
60122	199	65623	219	71622	198	75621	195	84400	239	85990	326
60330	199	67122	221	71623	198	75622	195	84405	239	85993	343
60440	199	67440	221	71631	198	75623	195	84431	326	85995	326
60460	285	67452	221	71632	198	76300	253	84431	337	85999	343
60621	199	68121	211	71633	198	76400	253	84431	337	86019	336
60622	199	68122	211	72277	313	77019	336	84431	392	86277	267
60623	199	68270	250	72307	313	77119	315	84432	326	86307	267
60631	199	68300	250	72407	313	77277	309	84432	337	86467	267
60632	199	68400	250	72437	313	77307	309	84432	337	87029	336
60633	199	68450	211	72637	313	77330	315	84432	392	87119	193
61270	252	68502	211	73119	226	77350	313	84600	239	87122	193
61275	252	68510	211	73121	226	77350	315	84605	239	87330	193
61300	252	68520	211	73122	226	77407	309	85120	343	87440	193
61305	252	68621	211	73277	316	77437	309	85144	326	87520	193
61400	252	68622	211	73307	316	77519	313	85144	337	87622	193
61405	252	68631	211	73440	226	77530	313	85144	337	87623	193
61600	252	68632	211	73580	316	77580	309	85144	392	87632	193
61605	252	68997	211	73621	226	77627	309	85183	343	87633	193
62412	340	69119	209	73622	226	77637	309	85190	343	88220	262
62415	340	69220	241	73623	226	77819	309	85220	343	88270	262
62425	340	69225	241	73627	316	77920	313	85244	326	88300	262
62430	340	69270	241	73631	226	77920	315	85263	343	88400	262
62432	340	69275	241	73632	226	77946	313	85290	343	88460	336
62460	340	69300	241	73633	226	77946	315	85330	343	89121	187
62475	340	69305	241	73637	316	77953	309	85332	343	89122	187
63360	273	69400	241	73819	316	77967	309	85336	343	89260	336
63367	273	69405	241	73953	316	77997	309	85360	326	89330	187
64119	307	69440	209	73967	316	79270	251	85364	326	89440	187
64153	341	69600	241	74119	194	79275	251	85396	343	89621	187
64158	341	69605	241	74121	194	79300	251	85420	343	89622	187
64270	234	69623	209	74122	194	79305	251	85444	326	90270	268
64300	234	69633	209	74277	315	79400	251	85460	326	90300	268
64400	234	70119	311	74307	315	79405	251	85470	326	90400	268
64453	341	70277	311	74407	315	79430	336	85475	326	90990	336
64458	341	70307	311	74437	315	80260	336	85544	326	91360	269
64803	341	70330	311	74621	194	81470	275	85626	343	91430	336
64808	341	70350	311	74622	194	81990	336	85696	343	92119	193
65119	219	70407	311	74623	194	82270	245	85732	323	92270	246
65121	219	70437	311	74631	194	82300	245	85753	323	92300	246
65122	219	70627	311	74632	194	82400	245	85769	323	92330	193
65221	219	70637	311	74633	194	82415	327	85876	337	92353	338
65222	219	70967	311	74637	315	82440	327	85884	337	92400	246
65223	219	71119	198	75119	195	82475	327	85890	326	92440	193
65331	219	71121	198	75121	195	82995	336	85890	337	92473	338
65332	219	71122	198	75122	195	83419	336	85890	337	92553	338
65333	219	71330	198	75275	260	83475	336	85890	392	92623	193
65440	219	71440	198	75305	260	84270	239	85894	326	92633	193
65550	219	71470	287	75330	195	84275	239	85894	337	92699	338

92853	338	199349	351	130L184-5F	763	1XXXXX	149
93153	338	205280	493	130L195-A	763	20469-15	189
93470	338	205284	493	130L195-B	763	20469-15	190
93579	338	205285	493	130L195-C	762	20469-15	212
95119	195	206280	493	130L195-D	762	20469-15	213
95121	195	206284	493	13XXXX	153	20469-15	216
95122	195	206285	493	140026-C3T	766	20C90	318
95179	338	222230	493	140026-F4T	766	20T90	318
95479	338	222238	493	140L0261L	767	20XXXX	113
95621	195	223232	499	140L026L	767	25227-1	305
95622	195	223233	499	141123-TC3	766	25227-2	305
95623	195	301182	493	141123-TC3D	766	25657-1	305
95631	195	311211	358	141123-TF4	766	25657-2	305
95632	195	311212	358	141123-TF4D	766	25667-1	305
95633	195	311241	358	14XXXX	145	25667-2	305
96009	338	311242	358	171160P30-C	753	257226C	495
96307	255	311311	358	171160P38(N)-C	753	258226C	495
96407	255	311312	358	17XXXX	155	25997-1	305
96477	255	311341	358	190S11	350	25997-2	305
97220	237	311342	358	190S12	350	2XXXX1X	167
97415	327	315011	353	190S41	350	2XXXXXX	45
98121	215	315012	353	190S42	350	2XXXXXX	79
98122	215	316011	353	191S11	350	2XXXXXX	121
98440	215	316012	353	191S12	350	310S11	359
98621	215	317211	360	191S41	350	310S12	359
98622	215	317212	360	191S42	350	310S41	359
99121	201	317242	360	192S11	354	310S42	359
99122	201	317311	360	192S12	354	313S11	352
99440	201	317312	360	192S41	354	313S12	352
99510	201	317341	360	192S42	354	313S41	352
99512	201	317342	360	192S42	355	313S42	352
99520	201	412201	97	193S11	354	314S11	352
99522	201	412202	97	193S12	354	314S12	352
99540	201	412622	97	193S41	354	314S41	352
99542	201	412922	97	193S42	354	314S42	352
99621	201	413633	97	194S11	355	32275-N	261
99622	201	413933	97	194S12	355	32305-N	261
99721	201	414644	97	194S41	355	32405-N	261
99722	201	414944	97	195S11	355	32605-N	261
198211	351	415501	97	195S12	355	32XXXX	107
198212	351	415502	97	195S41	355	332PB	317
198219	351	417701	97	195S42	355	332RB	317
198311	351	417702	97	196S11	357	332RN	317
198312	351	419901	97	196S12	357	333RB	317
198319	351	419902	97	196S41	357	333RN	317
199241	351	12XXXX	143	196S42	357	334RB	317
199242	351	130L006	761	197S11	357	334RN	317
199249	351	130L006-2	762	197S12	357	335RB	317
199341	351	130L006-2F	762	197S41	357	335RN	317
199342	351	130L184-5	763	197S42	357	3371-V2	347

Numerical Index (Code - Page)

33XXXX	133	4338-N	381	4XXXXX8	91	592563R1-C2	744
3432-N	736	4339-N	381	4XXXXXX	47	592563R1-C3	744
3433-N	736	4437-N	361	505119DIM-C	748	592563R1-F4	744
3434-N	736	4438-N	361	505143E-C	748	592563R-C2	744
3435-N	736	4439-N	371	50XXXX	53	592563R-C3	744
3436-N	736	4440-N	371	51XX1X	81	592563R-F4	744
3437-N	736	4449-V3	377	52101X	81	5XXXXX	49
3474-M	742	4450-V3	377	582L015-C3	765	5XXXXX	52
3479(N)	746	4457-D(N)	469	582L015-C3B	765	5XXXXX	93
3480(N)	746	4458-D(N)	469	582L015-F4	765	61XX0X	75
3481(N)	746	4459-D(N)	469	582L015-F4B	765	66470/N	286
3482(N)	746	4460-D(N)	469	582L016T40E-C3	752	66477/N	286
3483(N)	746	4461-N	563	582L016T40E-F	752	67632-L	221
3484(N)	746	4462-N	563	58XXXX	125	67632-R	221
3492-N	736	4463-N	563	592063-G12/3	768	6XXX8X	61
3493-N	736	4464-N	563	592063-G12/4	768	6XXXXX	55
3494-N	736	4499-V2	531	592063-TC	768	6XXXXX	60
3537(N)	744	44X9XX	84	592063-TF	768	6XXXXX	61
3538(N)	744	4500-V2	529	592072-1	750	6XXXXX	77
3539(N)	745	4645-N	411	5920731-(N2)	750	6XXXXX	169
3624-V2	347	4646-N	411	592074-C(N)	751	71XXXX	115
3654-N	733	4649-N	411	592076-C3(N)	751	72627-2	313
3655-N	733	4650-N	411	592122-FL2	743	72627-4	313
3656-N	733	4657-N	411	592122-FL2E	743	72967-2	313
3916-N	611	4658-N	411	592122-FL3	743	72967-4	313
3989-V3	363	4679-N	684	592122-FL3E	743	72967-L2	313
3990-V3	363	4680-N	684	592122R39-2	750	72967-L4	313
39XX1X	171	4681-N	684	592122R-C3	743	72XXXX	101
3X7XXX	375	4682-N	684	592125R2-C	747	74627-2	315
3X9XXX	373	4683-N	684	592125R2-C3	747	74627-4	315
3XXXXX	65	4684-N	684	592125R2-F	747	74967-2	315
4015-V2	734	4685-N	685	592125R-C	747	74967-4	315
4016-V2	734	4686-N	685	592125R-C3	747	74967-L2	315
4017-V2	734	4687-N	685	592125R-F	747	74967-L4	315
4018-V2	734	4688-N	685	592125S-6(N)	745	76XXXX	163
4019-V2	734	4689-N	685	592125S-6C(N)	745	78XXXX	99
4020-V2	734	4694-N	685	592125S-6F(N)	745	79XXXX	119
4021-V2	734	46XXXX	175	592125SC-2(N)	745	7X6XXX	367
4022-V2	734	4732-V2	473	592125SC-3(N)	745	80XXXX	85
4027-N	680	4733-V2	473	592125SC-4(N)	745	81XX0X	87
40XXXX	117	4734-V2	473	592141-C3E2	759	86XXXX	151
41XX0X	97	4736-V2	473	592141-E4C3	759	88XXXX	123
4241-N	533	4833-N	523	592165SIL-C	754	8XXXXX	89
4242-N	533	4834-N	523	592165SIL-F	754	91XXXX	139
4332-N	515	48XXXX	129	592563(N)-4C(N2)	744	92XXXX	141
4333-N	515	4952-N	563	592563(N)-4F(N2)	744	94XXX2	105
4334-N	513	4953-N	563	5925631(N)-4C(N2)	744	97XX4X	595
4335-N	513	4985-N	371	5925631(N)-4F(N2)	744	9XXXX1X	57
4336-N	381	4986-N	371	5925631-4C2(N)	744	9XXXXX	147
4337-N	381	49XXX2	173	592563-4C2(N)	744	CCT-10DA	339

CCT-10TR	339	SP-6329	291	Z12471	178
CCT-20DA	339	SP-9812	291	Z1XX0X	156
CCT-20TR	339	TP-98-B-3D	215	Z1XX0X	157
CCT-40DA	339	TP-98-N-3D	215	ZDXXXX	136
CCT-40TR	339	TR10024	340	ZQ6XXX	135
CCT-60DA	339	TR10024DA	341	ZTXXXX	137
CCT-60TR	339	TR10024TR	341		
D-3626	347	TR15024DA	341		
D-3627	347	TR15024TR	341		
D-3628	347	TR16024	340		
DM4430	299	TR3024	340		
DM4437	299	TR3024DA	341		
DM5470	301	TR6024	340		
DM5477	301	TR6024DA	341		
DR-H-21W	339	TXT-012	177		
DR-H-42WCAS	333	TXT-03	177		
DR-H42WDA	339	TXT-05	177		
DR-H-43W	339	TXT-08	177		
DXXXXX	41	TXT-09	177		
DXXXXX	43	TXT-18	177		
F1XXXX	557	TXT-20	177		
F2XXXX	557	TXT-24	177		
F3XXXX	557	TXT-37	177		
HRZ-01	167	UDXXXX	161		
HRZ-02	167	UNI-98-B-3D	215		
HRZ-PLE-01	167	UNI-98-N-3D	215		
HRZ-PLE-02	167	VXXXXX	127		
K25183	179	X3XXXX	71		
K25189	179	X5XXXX	95		
K25411	179	X8XXXX	73		
K25412	179	X9XXXX	69		
K25431	179	XXXXXX	165		
K25432	179	XXXXXX	51		
K25619	179	XXXXXX	67		
K25639	179	XXXXXX	83		
K25731	179	XXXXXX	109		
K25732	179	XXXXXX	131		
L7XXXX	103	Z11011	178		
S1XXXX	555	Z11021	178		
S2XXXX	555	Z11031	178		
S3XXXX	555	Z11051	178		
SP1270	291	Z11071	178		
SP1300	291	Z11511	178		
SP1400	291	Z11521	178		
SP2430	293	Z11551	178		
SP2435	293	Z11571	178		
SP3470	295	Z12411	178		
SP3475	295	Z12421	178		
SP4437	296	Z12431	178		
SP5470	297	Z12451	178		

Headquarters 1



Headquarters 2



Headquarters



Headquarters 1

C/ Thomas Edison, 4-6
Polig. Valldoríolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 2

C/ Nòria, 10
Polig. Valldoríolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 3

C/ Nòria, 15
Polig. Valldoríolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 3







BENEITO FAURE®